



# GETTING STARTED ON 10 GHZ

Release 6

# Overview

This Powerpoint is explaining my first steps in the *choice of a 10 GHz transverter* found on the market. On the side it gives some hit and kinks about :

- The locator grid squares reached within a 2 month period with only 1W !!!*
- How to make the FT-817nd compatible (best TRx choice associated with transverters)*
- Prime-focus and offset dishes – solving the 0° elevation*
- Monoband and multiband feedhorns*
- A final overview about setups of some well known french hams*

# **Abstract 1/2**

**1- 10 GHz beacons, SCPs and QSOs from JN18gr**

**2- 10 GHz SSB-Electronic transverter (<1995)**

**3- 10 GHz DB6NT transverter**

- Version 1:
  - schematics & practical
  - LO frequency drift
- Versions 2 and 3 : Rx Nf and principally LO stability improvements

**4- Indoor, then outdoor operations with a single 49 cm Procom dish**

**5- FT-817nd modifications**

- Positive voltage added on Tx mode to the 144 MHz coaxial cable for PTT purposes
- S-meter desensibilisation

**6- Prime-focus & offset dish gain comparaison**

**7- Offset dish mounting problems**

**8- IK1GEX 5.7 / 10 GHz double horn**

- S11 and isolation measures between both bands

**9- SQG 10 GHz horn**

- Adjusting and S11 measures

**10- Visiosat SATTV horn**

## **Abstract 2/2**

**11- Improvement ideas of actual personal setup**

**12- Antenna settings of well known french « hyper » dXers**

**13- Aknowledgements**

# **1- 10 GHz beacons and QSOs with 1W**

# 10 GHz beacons

French 10 GHz beacon list					La Crau		F6BVA	Puissance : 1000 Watts PIRE Antenne : Parabole Orientation : Nord Ouest
10368.053	F5XBD	JN18JS	77	Favières	10368.073 MHz			Puissance : 60 Watts Antenne : Fentes
10368.108	F1XAP	IN88HL	22	Plougonver	326	F1LHC		Puissance : 10 Watts Antenne : Fentes
10368.282	F5ZPS	IN94QT	33	Talence	83	F6CBC		Puissance : 20/800 Watts Antenne : Cornet Orientation : Nord Est / Sud Est
10368.825	F1XAU	JN27IH	21	Sombernon	516	F1MPE		Puissance : 13 Watts Antenne : Fentes
10368.842	F5ZTR	JN09WV	60	Beauvais	10368.840 MHz - 325°			Watts es
10368.850	F1BDB	JN33KQ	06	Doublier	1200	F1BDE	8 nov de retour	
10368.859	F1DLT	JN27UR	70	La Roche		F1DLT		Puissance : 15 Watts Antenne : Cornet Orientation : Nord Ouest
10368.863	F5XAD	JN12LL	66	Pic Neulos	1100	F2SF		Puissance : 2 Watts Antenne : Fentes
10368.865	F1XAI	JN07WV	45	Orléans	10368.862 MHz - 207°			Watts Antenne : Fentes
10368.884	F1XAE	JN24PE	84	Mont Ventoux	1910	F1AAM		Puissance : 5 Watts
10369.900	F5XAY	JN06wd	23	X X X X X	888 ou 892 MHz - 199°			piaule =F1XAI + 29 kHz
10369.919	F5ZWM	JN05VE	19	Sainte Fortunade	10368.883 MHz - 188°			coupure porteuse
10368.928	F1URI	JN35FU	73	via Mont Blanc	1660	F1URI		Puissance : 2200 Watts Antenne : Parabole Orientation : >JN35KT
10368.950	F5ZTT	JN14EB	81	Lacapelle	10368.948 MHz			Puissance : 10 Watts Antenne : Fentes
10368.983	F5ZWZ	JN23XE	83	Grand Cap	780	F6BVA		Puissance : 10 Watts Antenne : Fentes En cours de réalisation
10368.994	F5XBG	JN26KT	71	Chalon		F6FAT		Puissance : 5 Watts Antenne : Fentes

Constantly  
50% time  
Occasionally (RS)

→10368.836 MHz



1296.930 JO93EO	5760.875 JO92JJ	GB3CEM 25w 10368.880 JO92WQ	2320,900 F6DVG/B 60 JN09 10w	5760,904 F6DVG/60 JN09XJ 70w	1296,847 F5XBK/77 JN18JS 10w	JN48HF 5w 1296.882 JO10UN	JO9KHT 3w 10368.820 JO4QPE	DB3JK 200w 10368.865 JO6JLX
GB1ANG 42 170° 1296.965 JO86MN	GB3OHM 55w 1296.900 JO92AJ	GB3EPE 0.9w 10368.910 JO81AQ				JN4R0U 10w 10368.833 JO50WB	DB3FGB 7w 10368.833 JO50WB	DB3EKA 10w 10368.835 JN57UV
JO9BEE w 1296.970 JO90GP	GB3LUC 7w 1296.905 JO80LU	GB3MLE 2w 10368.930 JO91QF				DB3K 13w 10368.840 JO50WC	DB3DHR 8w 10368.910 JN51HT	
GB3EDN 25w 1296.990 JO86HW	GB3PNM w 1296.920 JO910F	2w 0° / 180° 10368.930 JO91QD	10368,842	24048,170	5760,820	DB3ZVS 10w 10368.975 JO20KV		





# 10 GHz SCPs for RS


RS map from <http://home.hccnet.nl/uffe.noucha/weurope.htm>

## QSO examples with F6DRO or DB6NT via SCP's

SCP = scatter point

RS = rain scatter (thick thunderstorm cumulonimbus)

Good SCP radius efficiency up to 400 Km

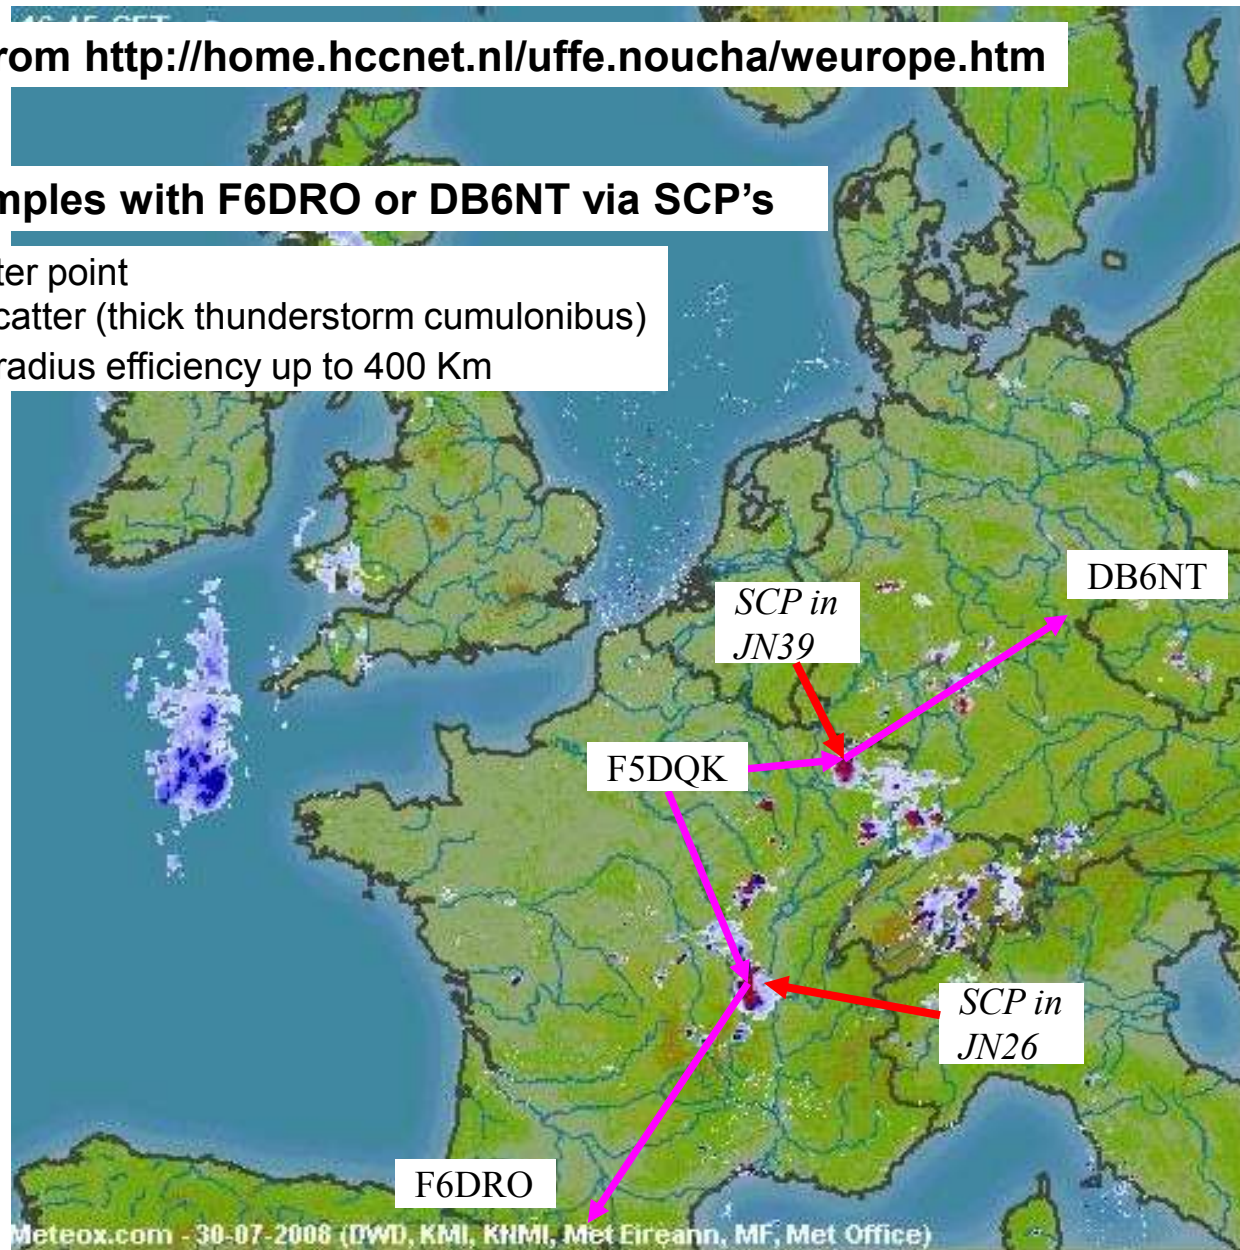


*F5DQK April 2014*

*Getting started on 10 GHz band - release 6*



# 10 GHz SCPs for RS


**New :** RS map from <http://tk5ep.free.fr/rsmap/rsmap.php>

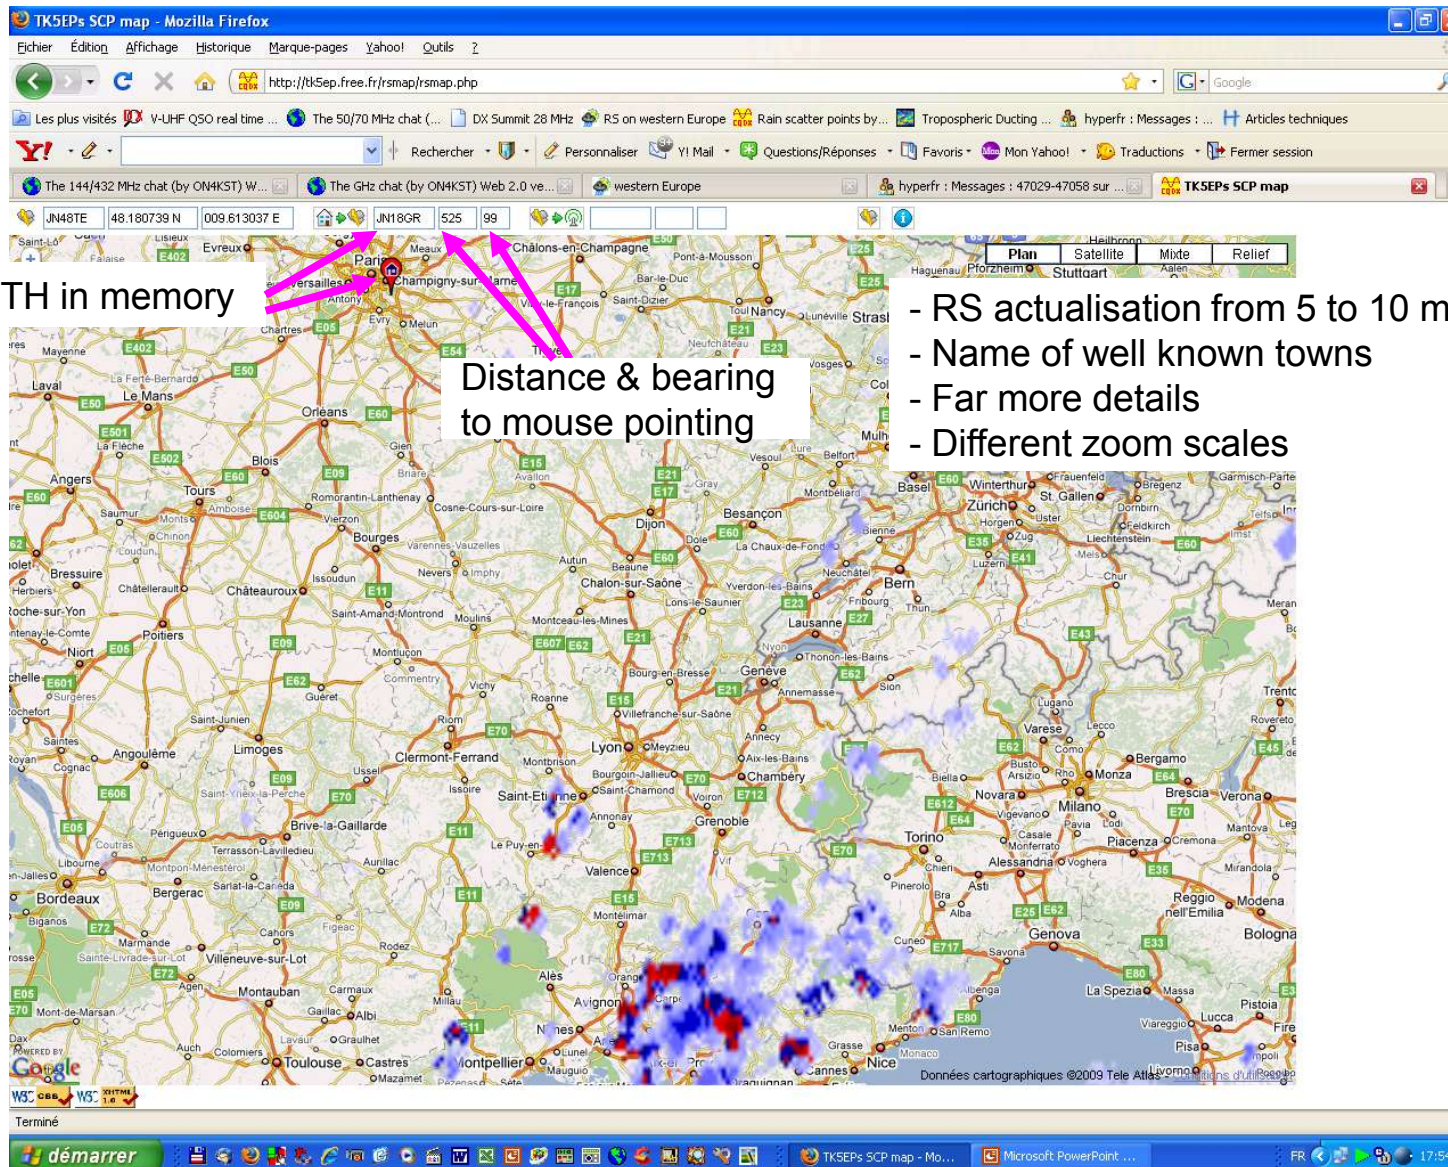



# 10 GHz QSO's

June to August 2008 from JN18gr via tropo & principally RS

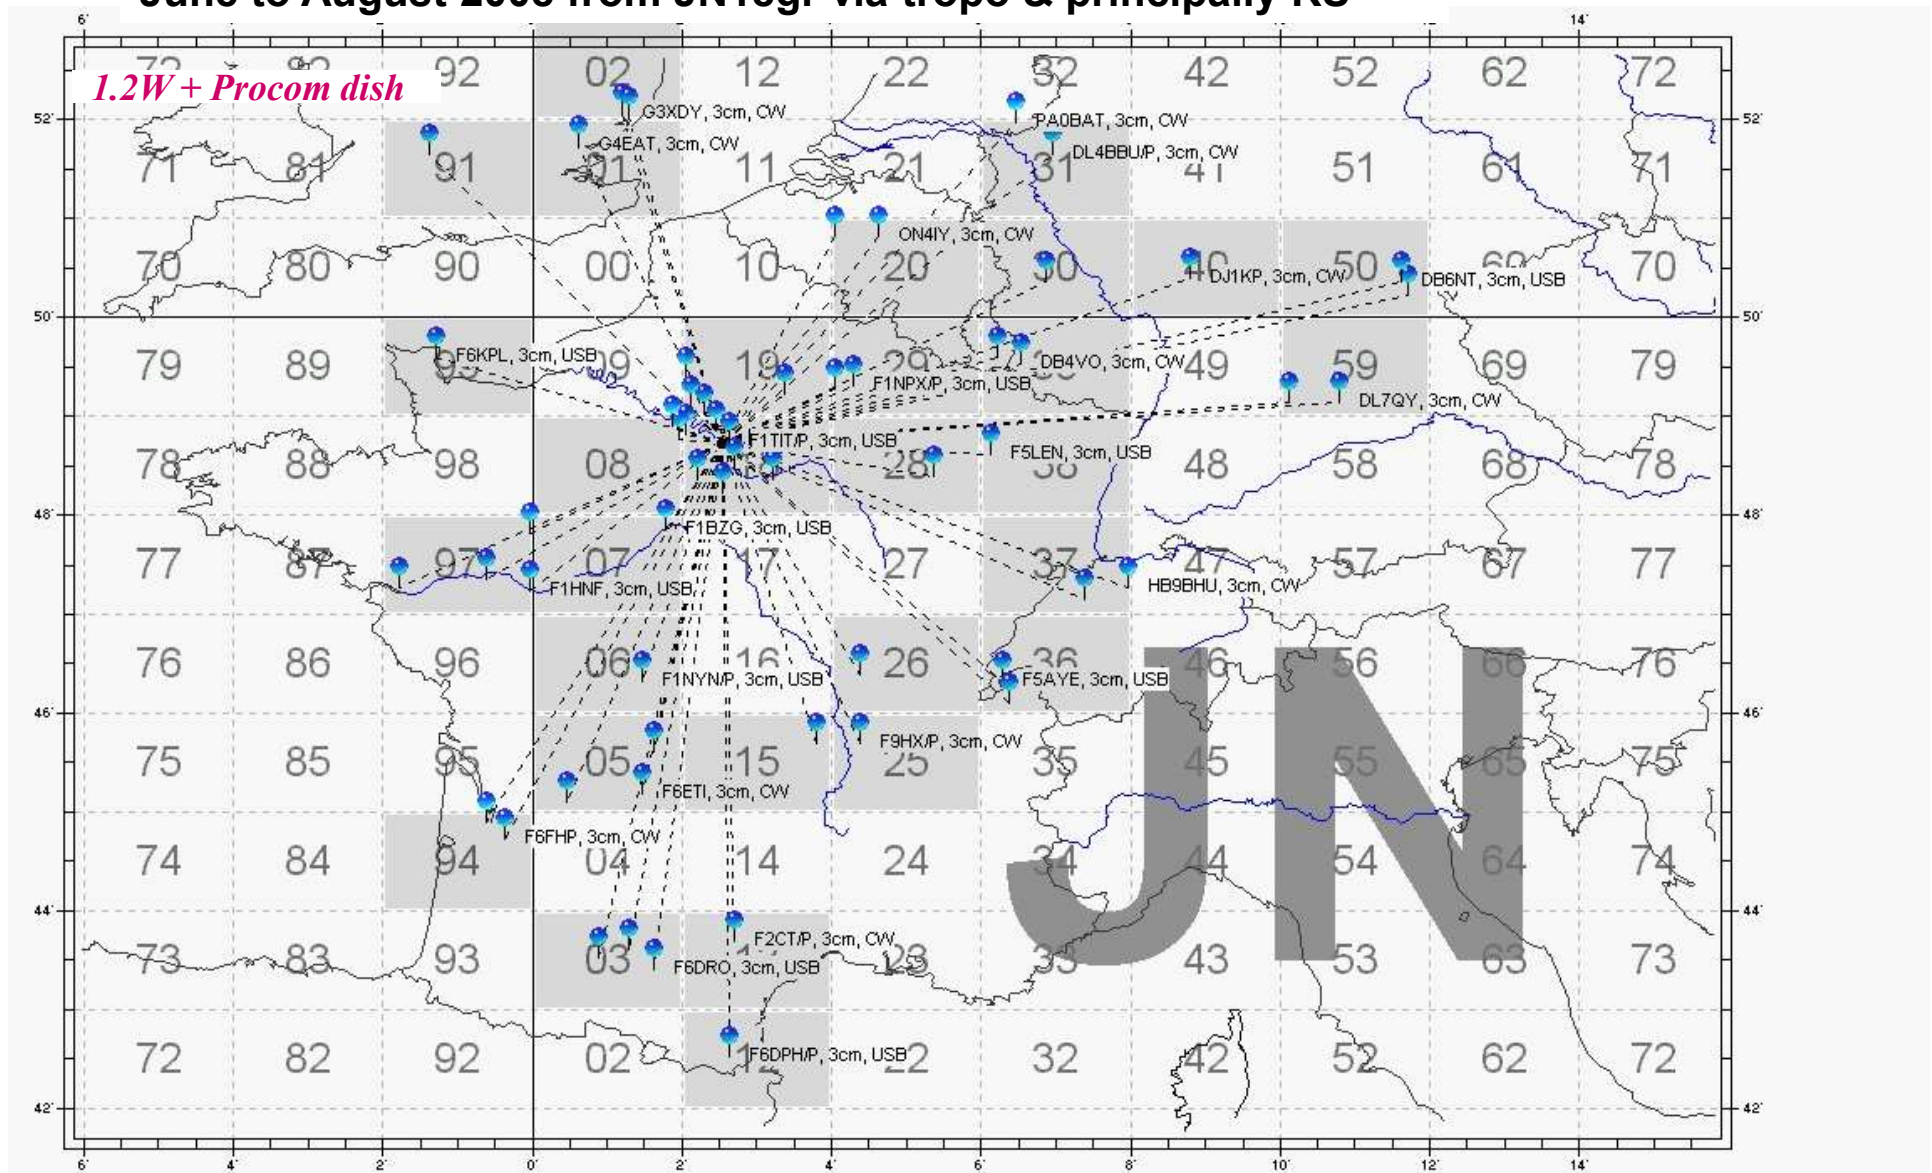


F5DQK April 2014

Getting started on 10 GHz band - release 6

# 10 GHz QSO's


## Zoom on QSO's from JN18gr in dir south of France

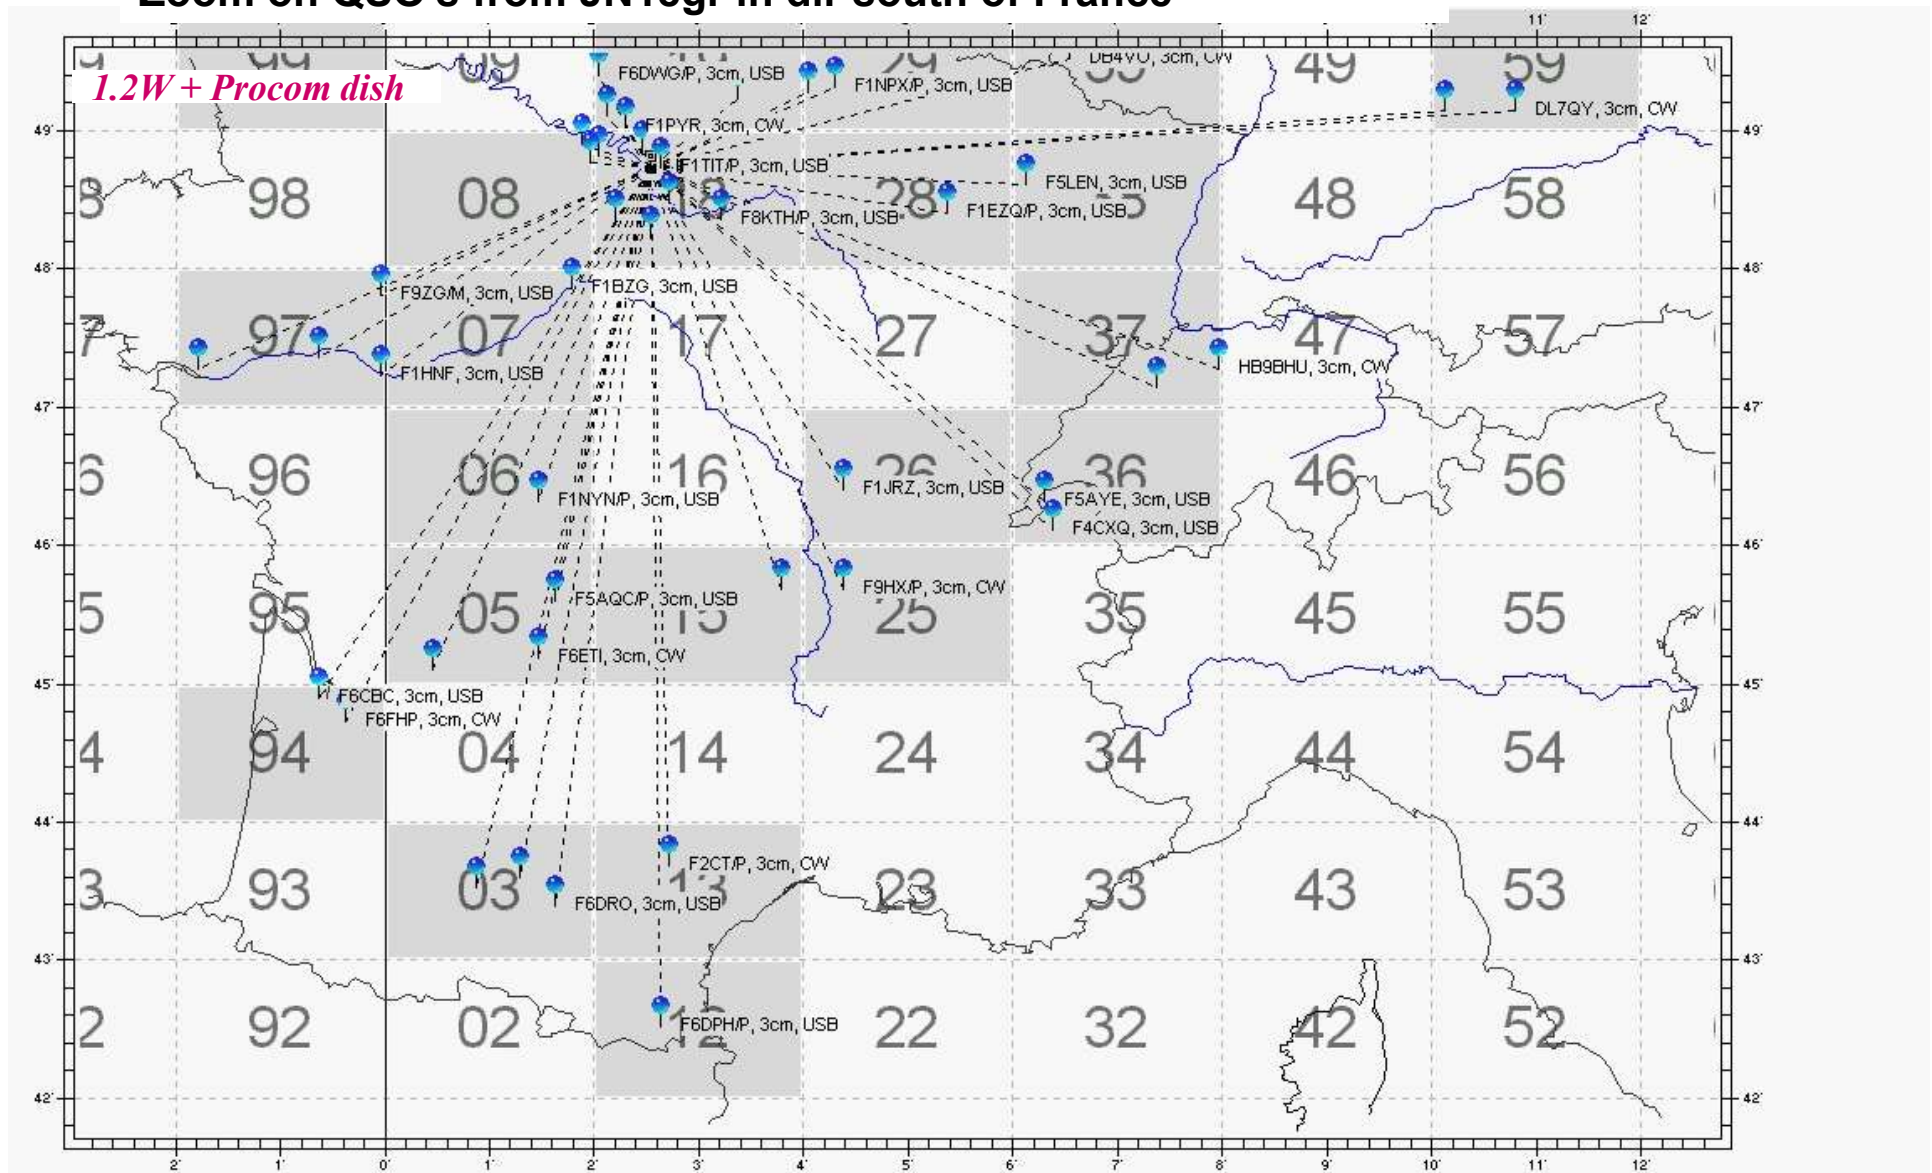




# 10 GHz QSO's

May 25th 2009 RS report from OZ1FF  
in the DUBUS revue

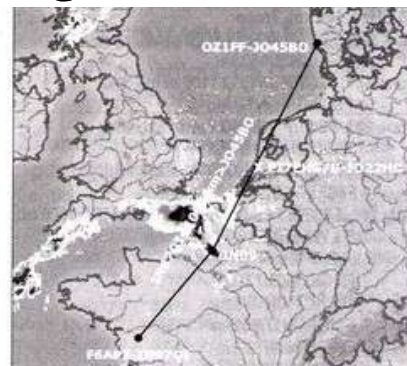

Path of the 1099km Rainscatter QSO on 3cm

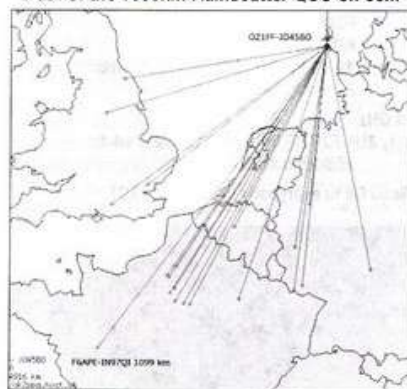

RS QSOs on 3cm by OZ1FF

**F2CT:** Many and very interesting RS qos since April with some Dx and records up to 1093 km on 6 and 3 cm. On 24 GHz some unilateral tests up to 600 km let us to think that long distance qos are possible with very strong storms and very high clouds of ice.

**Here is the report from Kjeld OZ1FF:**

Hello Guy, your prediction in DUBUS 2/2009 that RS QSOs in the 1000 km range would be reached was right. On May 25 2009 at 07:43z I worked **F6APE on 10 GHz RS, IN97QI over 1099 km from JO45BO for a new RS world record.** The old RS WR was 1008 km and held by AF1T/W4DEX. The scatter point was located over JN09 about 800 km away and could be reached with the help of super refraction over the North Sea indicated by the reception of PI7EHG/B in JO22HC. Exchanged reports was 51S in both directions. A sound clip is at: [www.oz1ff.dk/Pages/News/News.htm](http://www.oz1ff.dk/Pages/News/News.htm). F6APE rig: DB6NT xverter, 60 cm dish/6 W and here: DB6NT xverter, 65 cm offset dish 25 m ASL/3.5W. The RS/TR lasted until the early evening making 10 GHz RS QSOs with 10 different F-stations possible (F6APE, F6DKW, F6DWG, F5DQK, F4BUC/P, F6ACA, F1ISM, F1PYR/P, F1NXP/P, F5PEJ/P). Before ending I worked F6DWG also on 5,7 GHz RS, 804 km and 1. F to OZ on this band. 20 TR/RS QSOs with an average of 750 km and 6 new squares. Really an exciting day. Now off for the record on 24 GHz! :-)  
Vy 73 de OZ1FF - Kjeld

## Reports from F2CT:

5,7 GHz > 600 km, Tropo

May 31<sup>st</sup>, F2CT/P IN92PX 1600 m asl, wkd:

- F9ZG/P/JN36/652 km

June 20<sup>th</sup>, F2CT/P IN93HG 930 m asl, wkd:

- F6DWG/P/JN19/729 km

July 16<sup>th</sup>, F2CT/P IN93HG 930 m asl, wkd:

- F4CKC/P/JN26/653 km

July 26<sup>th</sup> F2CT/P F6AJW/P F6CBC/P IN92PX 1600m:

- F5LWX/P/IN78/644 km

- F6DWG/P/JN19/744km

- F5IGK/JN09/727km

- F4CKC/P/JN19/715km

- F1JGP/JN17/600km

- F6KPL/IN99/738km

August 1<sup>st</sup> F2CT/P IN93HG 930 m asl, wkd:

- F4CKC/P/JN27/635 km





# 10 GHz transverter overview

On 10 GHz, not many hams are manufacturing transverters on industrial scale.

-Before year 1995 the only choice was the 10 GHz SSB-Electronic transverter Kits. The number of total « on shelf » ready assemblies were really limited.

-After year 1997, DB6NT did really democratise the SHF transverter world. Not only on 23 cm but up to 24 GHz and above.


-In 2008 the 3rd generation with a 106.5 MHz self Quarz oscillating LO is replaced by a ocoxo (oven oscillator) locked to a 10 or 100 MHz ultra high precision oscillator (eventually also GPS referenced).

## **2- 10 GHz SSB-Electronic (1988)**

- 2 separate Rx and Tx mixers boxes**
- 2.556 GHz separate LO with 106.5 MHz quartz**
- Pout > +20 dBm or 100 mW (option 1 = 200 mW)**
- Nf < 2.5 dB**
- Need of 2 coaxial relays on both RF and IF sides**

## 10 GHz SSB-Electronic Transverter


## Rx converter scheme

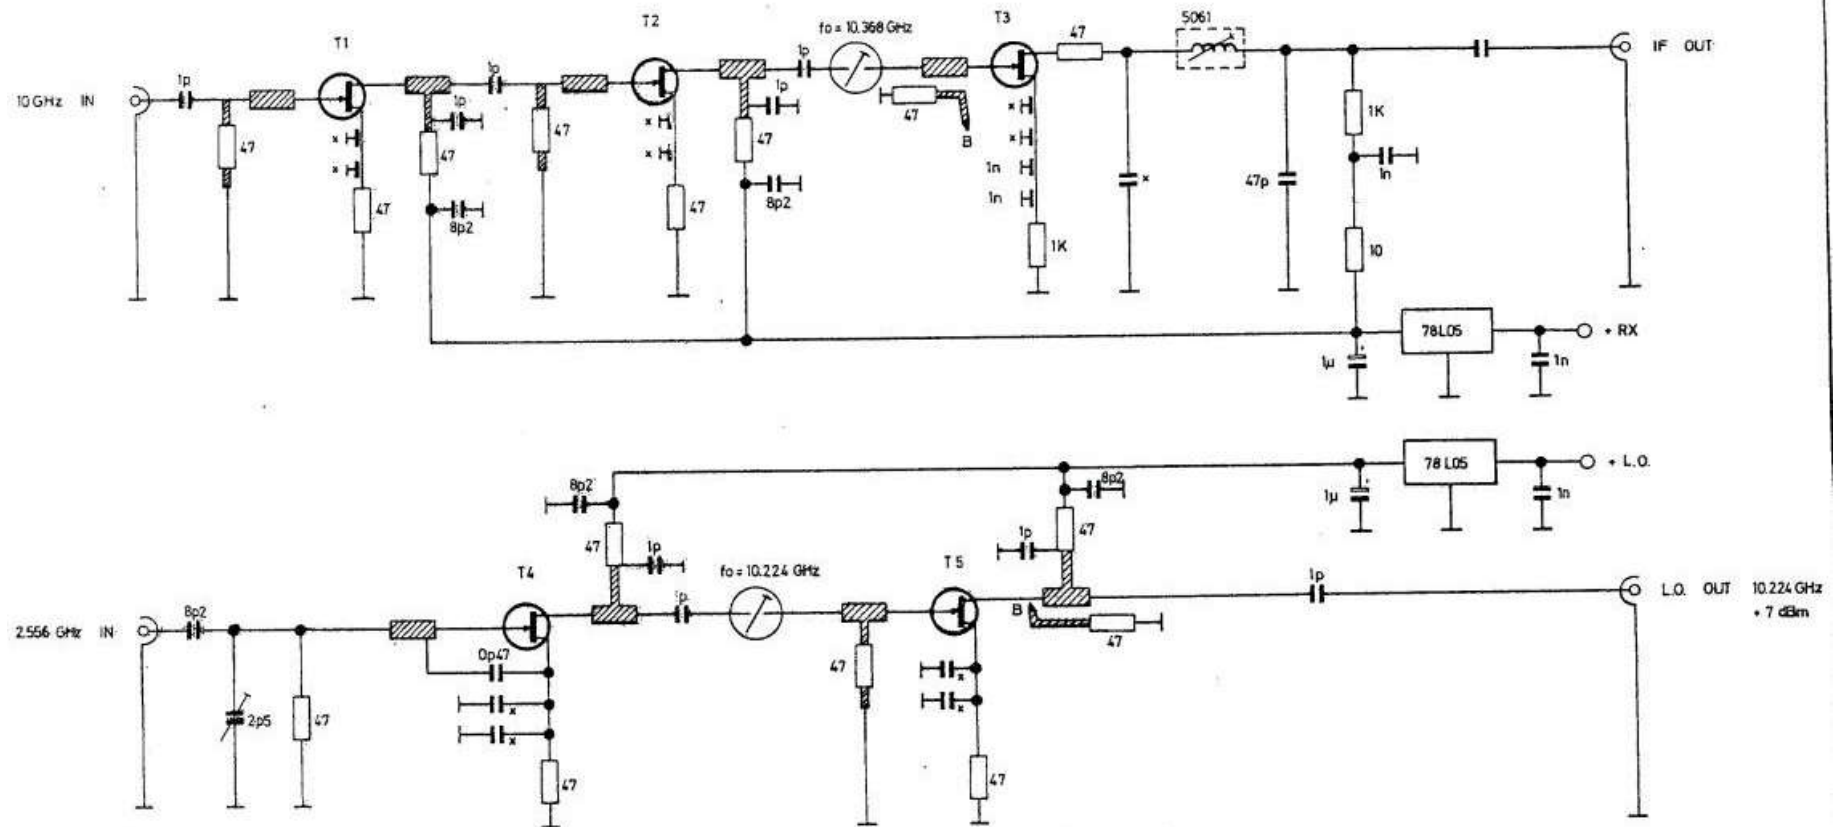




# 10 GHz SSB-Electronic Transverter

Rx converter layout

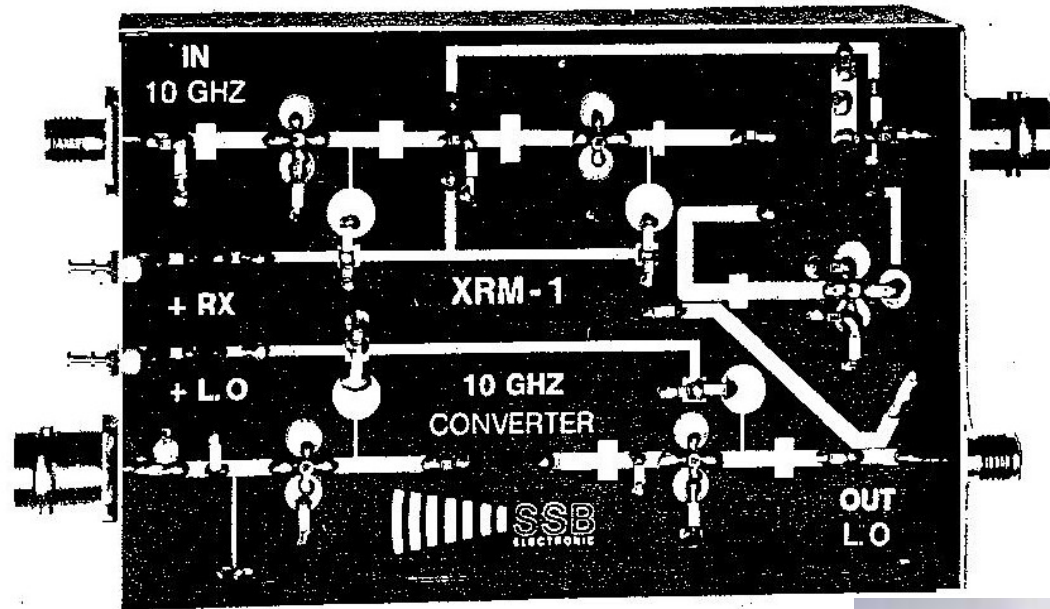


# 10 GHz SSB-Electronic Transverter

## Tx converter scheme

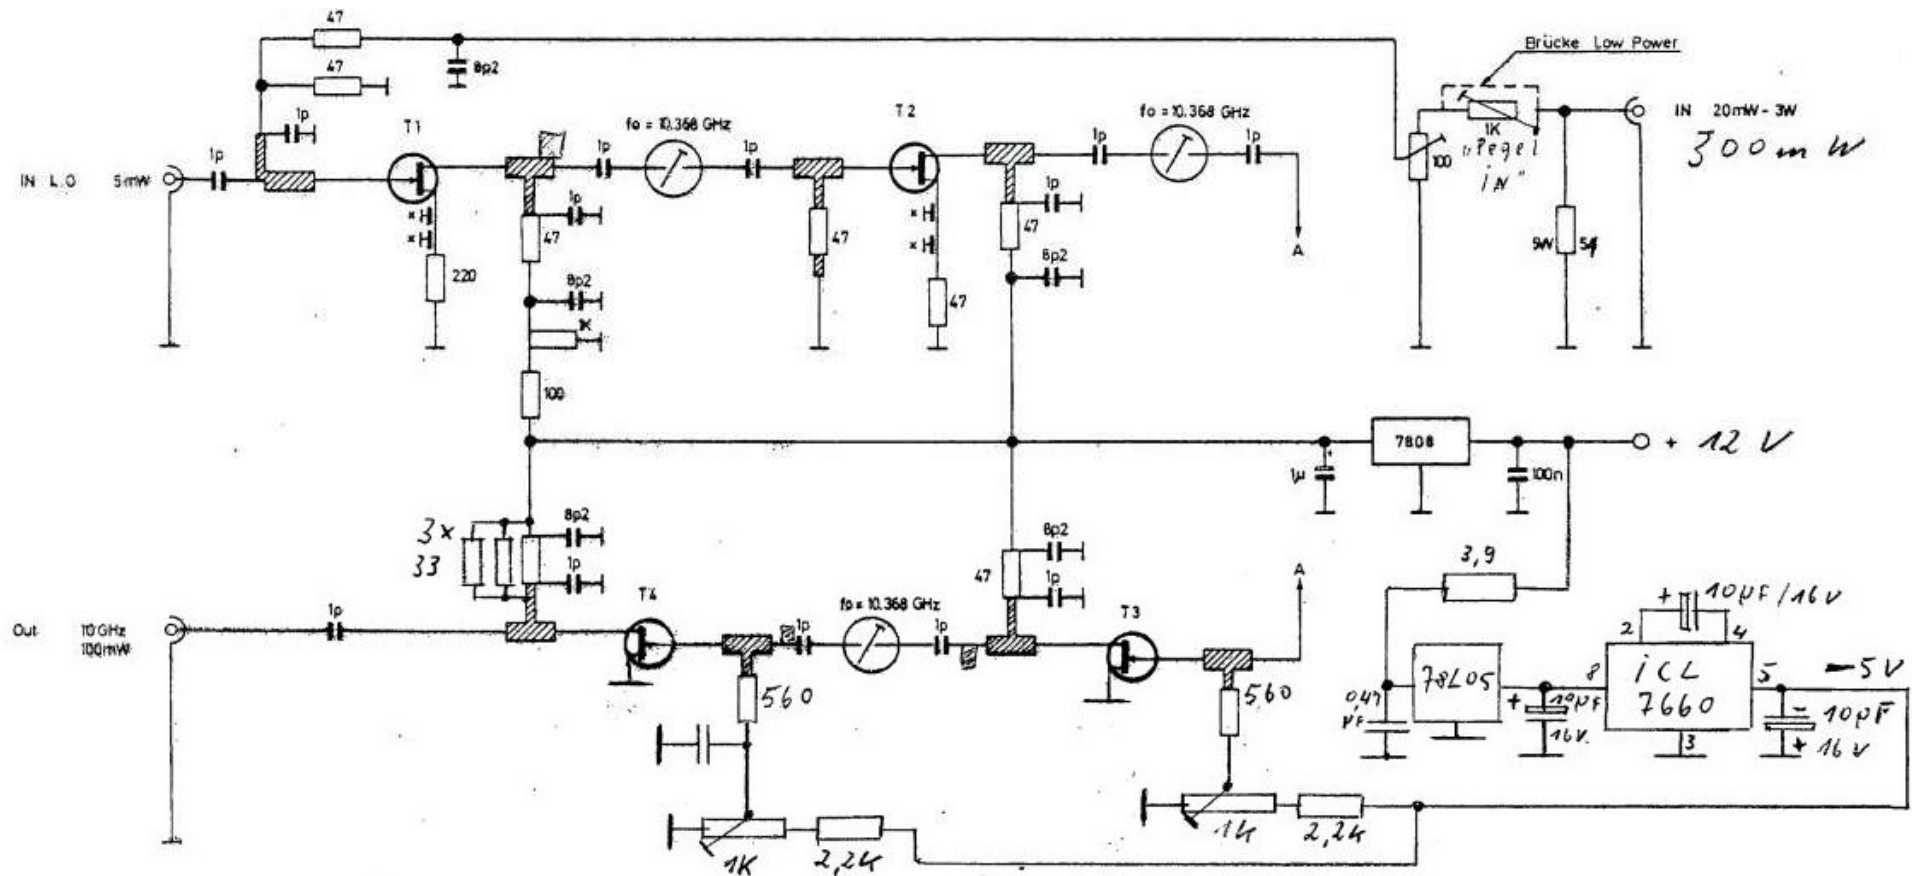


# 10 GHz SSB-Electronic Transverter

Tx converter layout

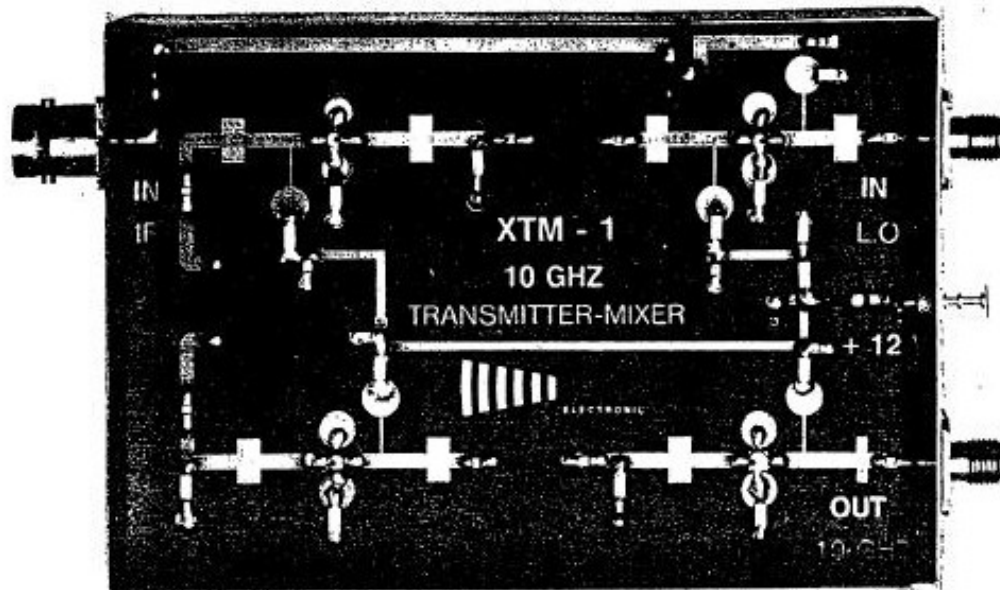


## 10 GHz SSB-Electronic Transverter

## 2.556 GHz XLO-1/01 local oscillator

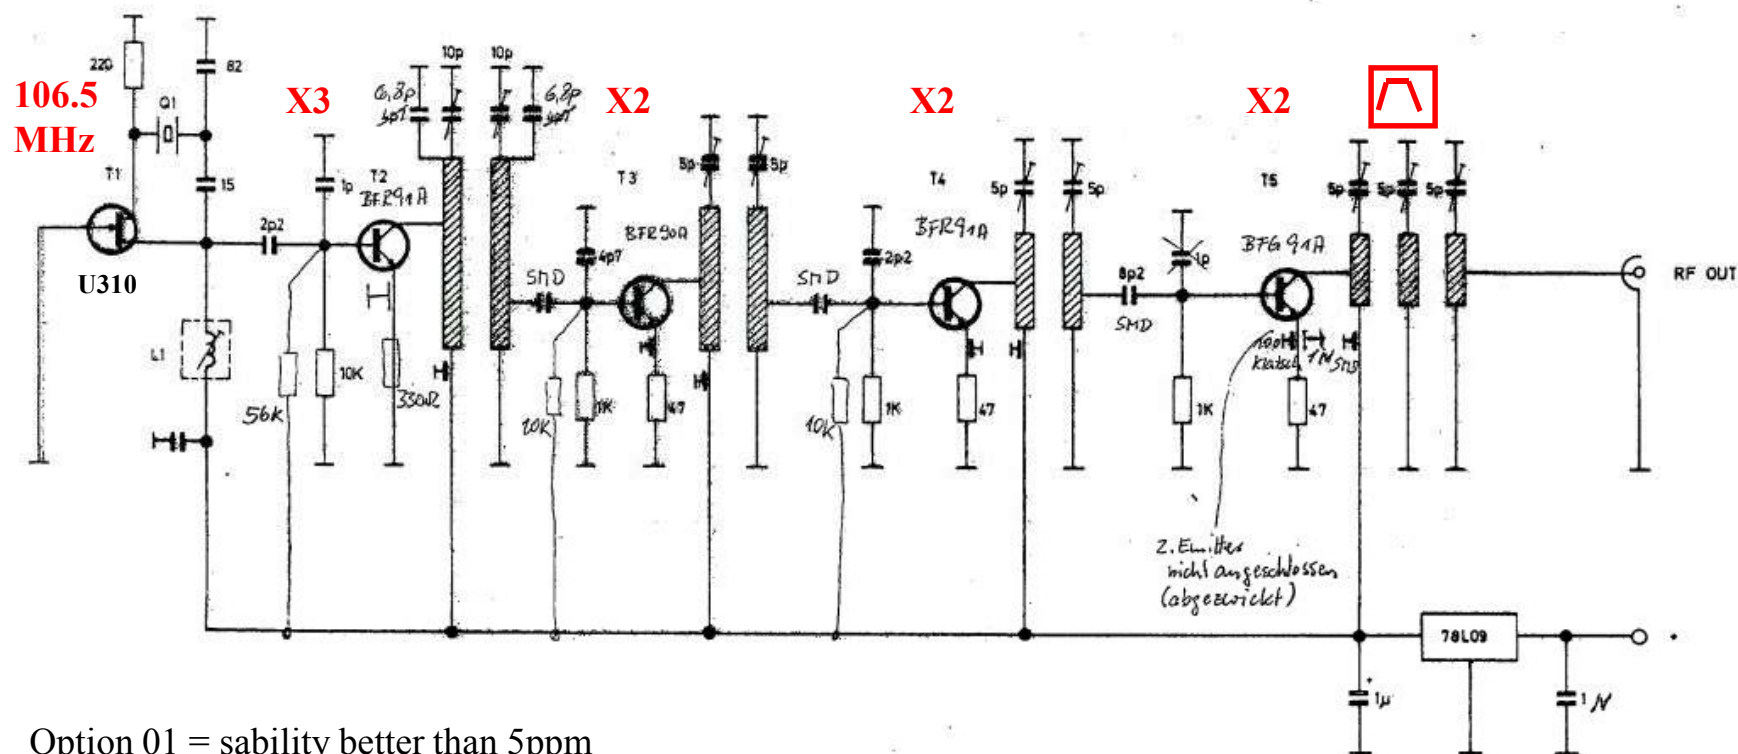


Option 01 = stability better than 5ppm

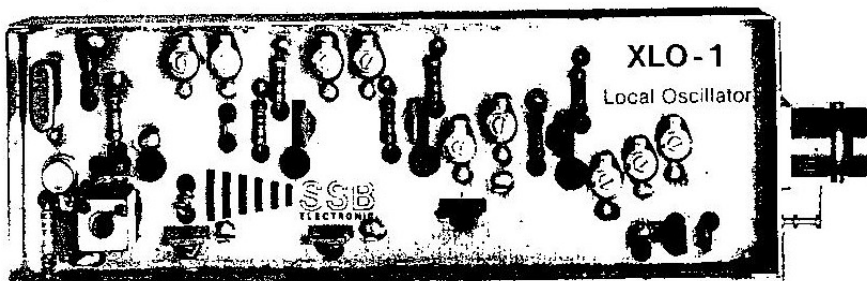



## 10 GHz SSB-Electronic Transverter

### A boxed transverter (sold for 290€ in Weinheim)

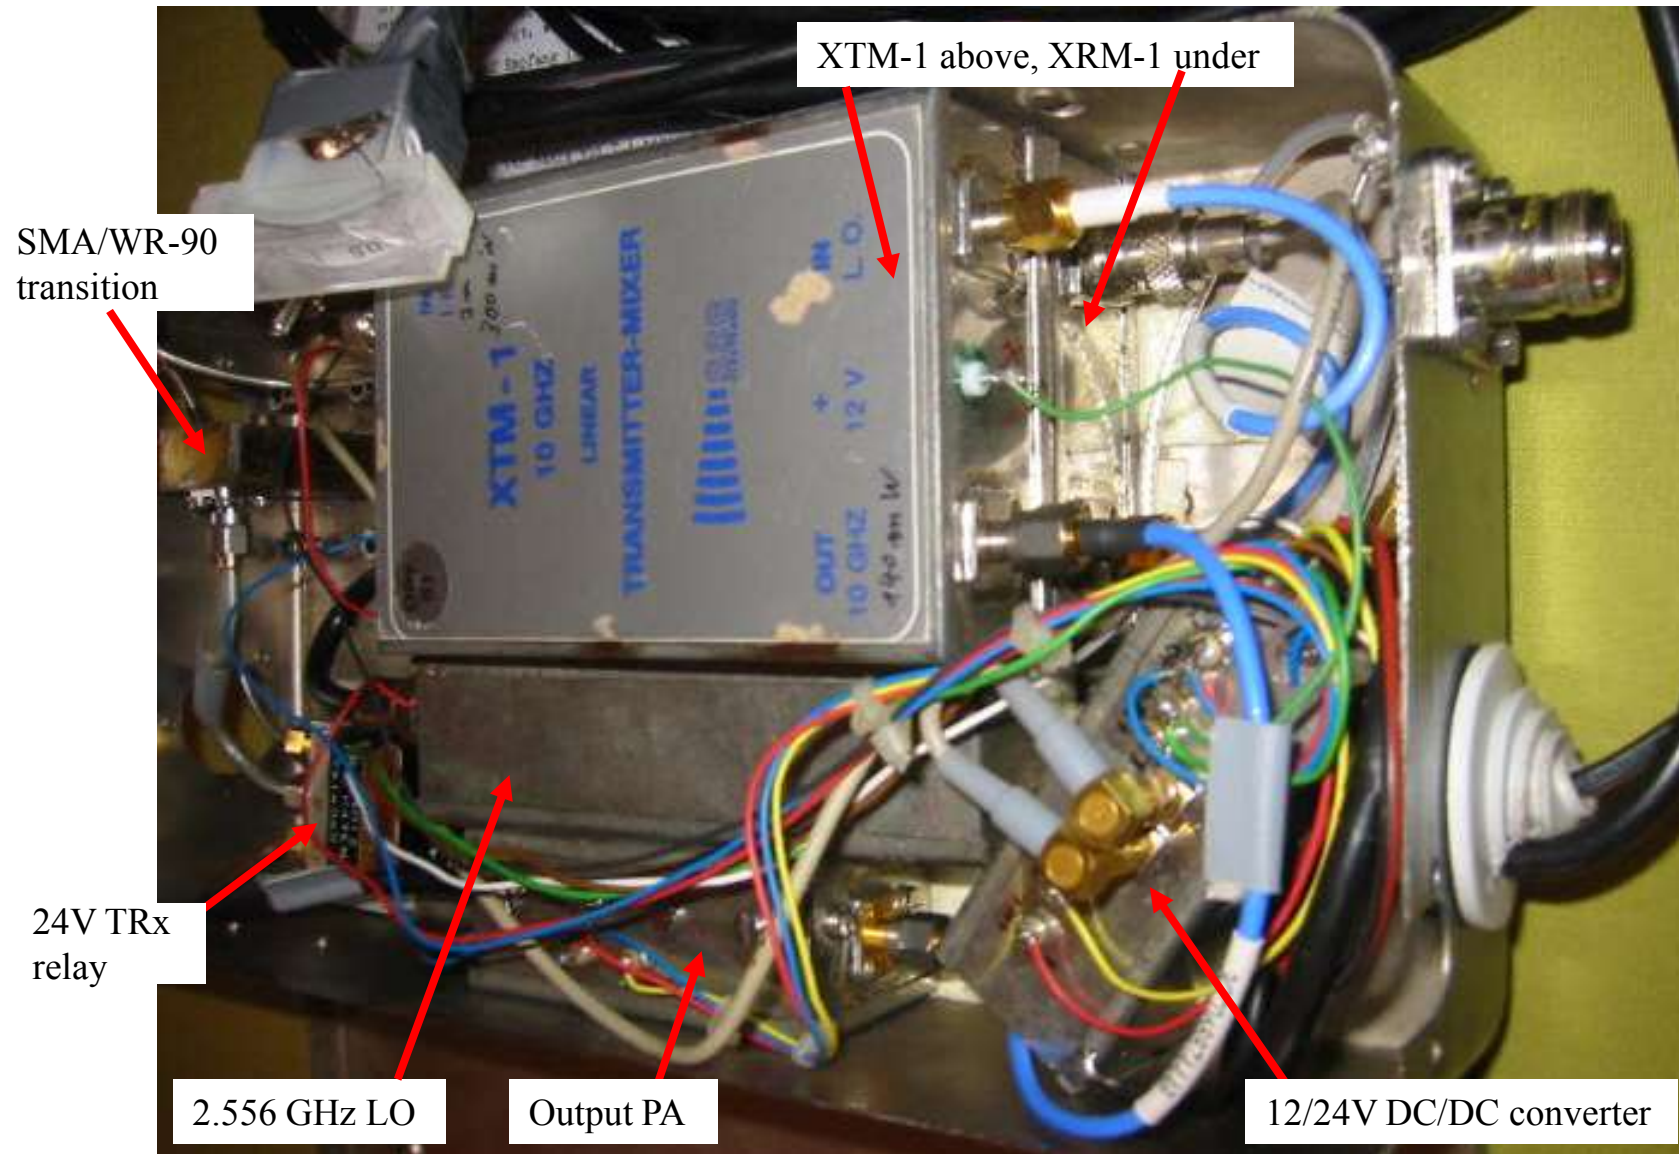


## **3a- 10 GHz DB6NT transverter vers 1**

- Rx and Tx in « all in one » box
- same 2.556 GHz self oscillating LO with 106.5 MHz quartz
- PTT : only positive Voltage applied on 144 MHz coax
- Pout = +7 dBm or 5 mW

**That was my choice**

# 10 GHz DB6NT Transverter



## Transverter version 1 (1991)

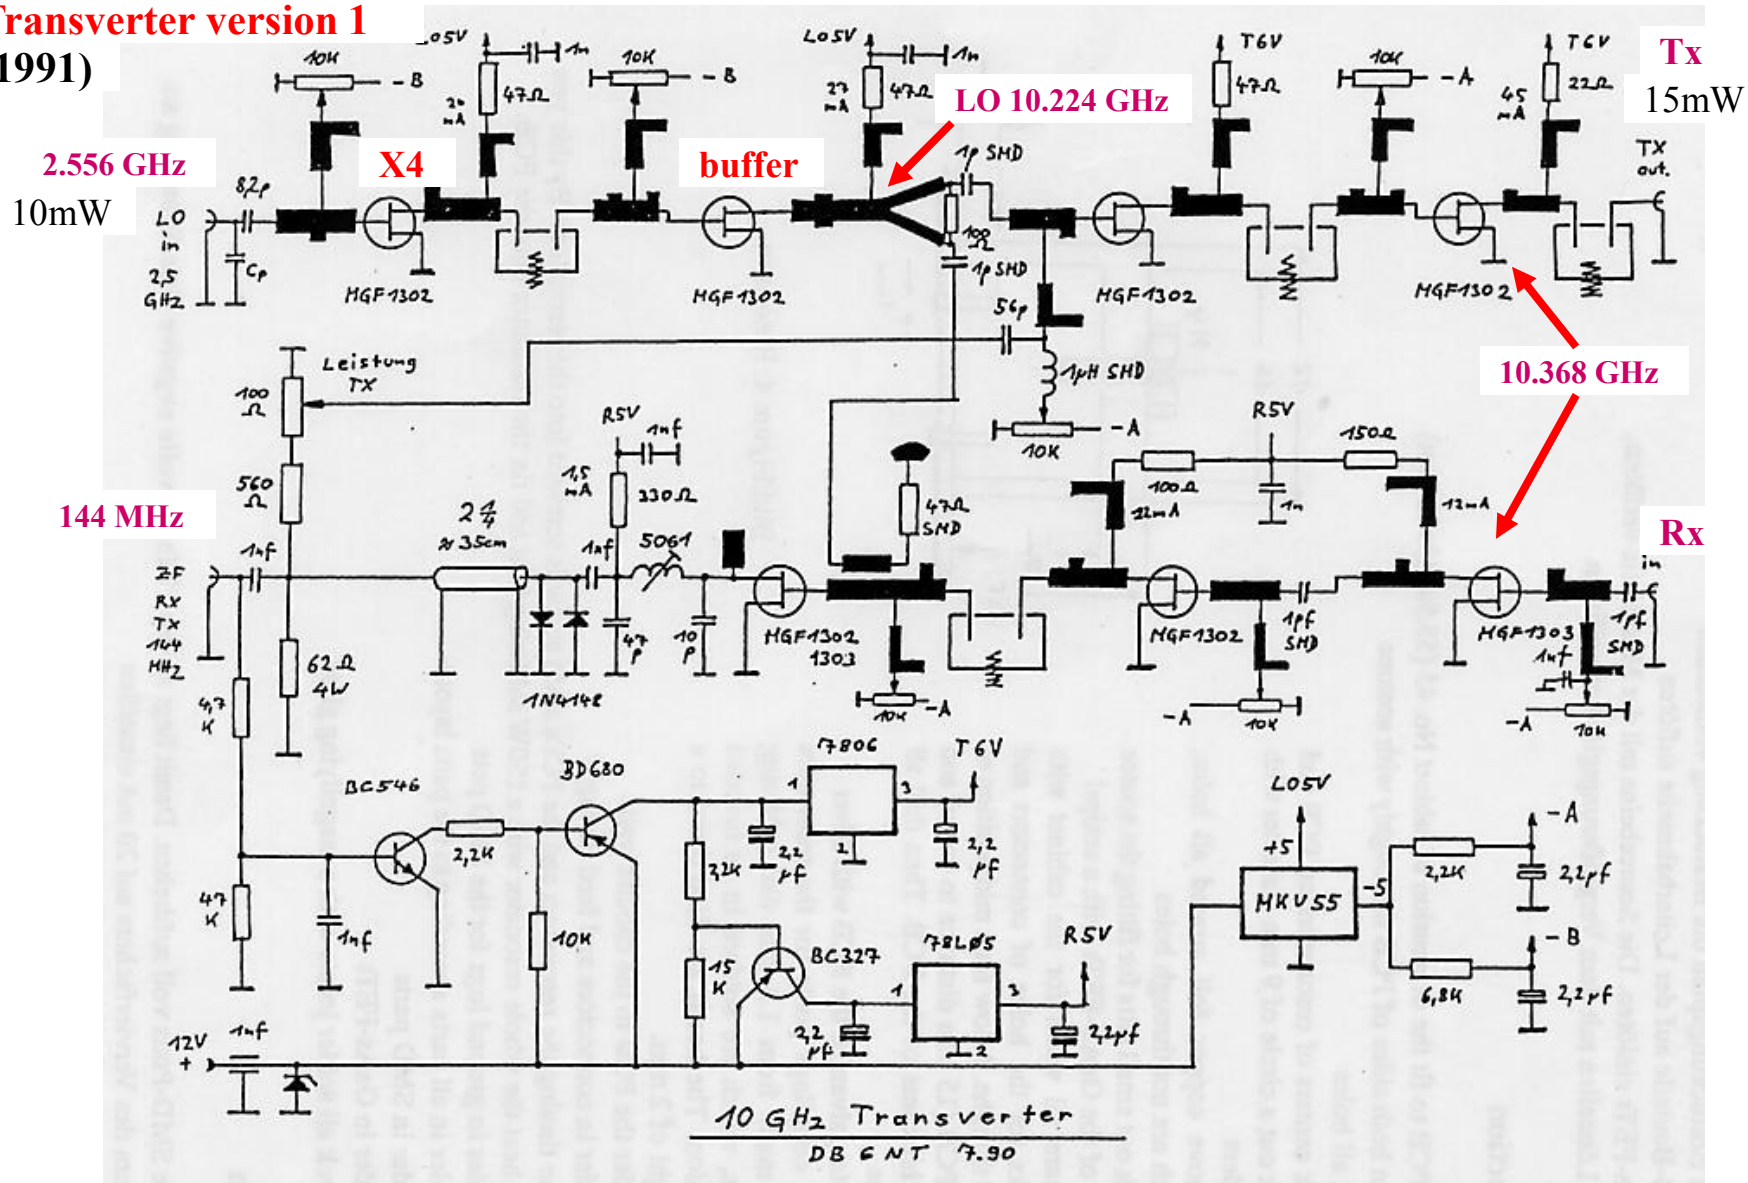



# 10 GHz DB6NT Transverter

## Transverter version 1 layout

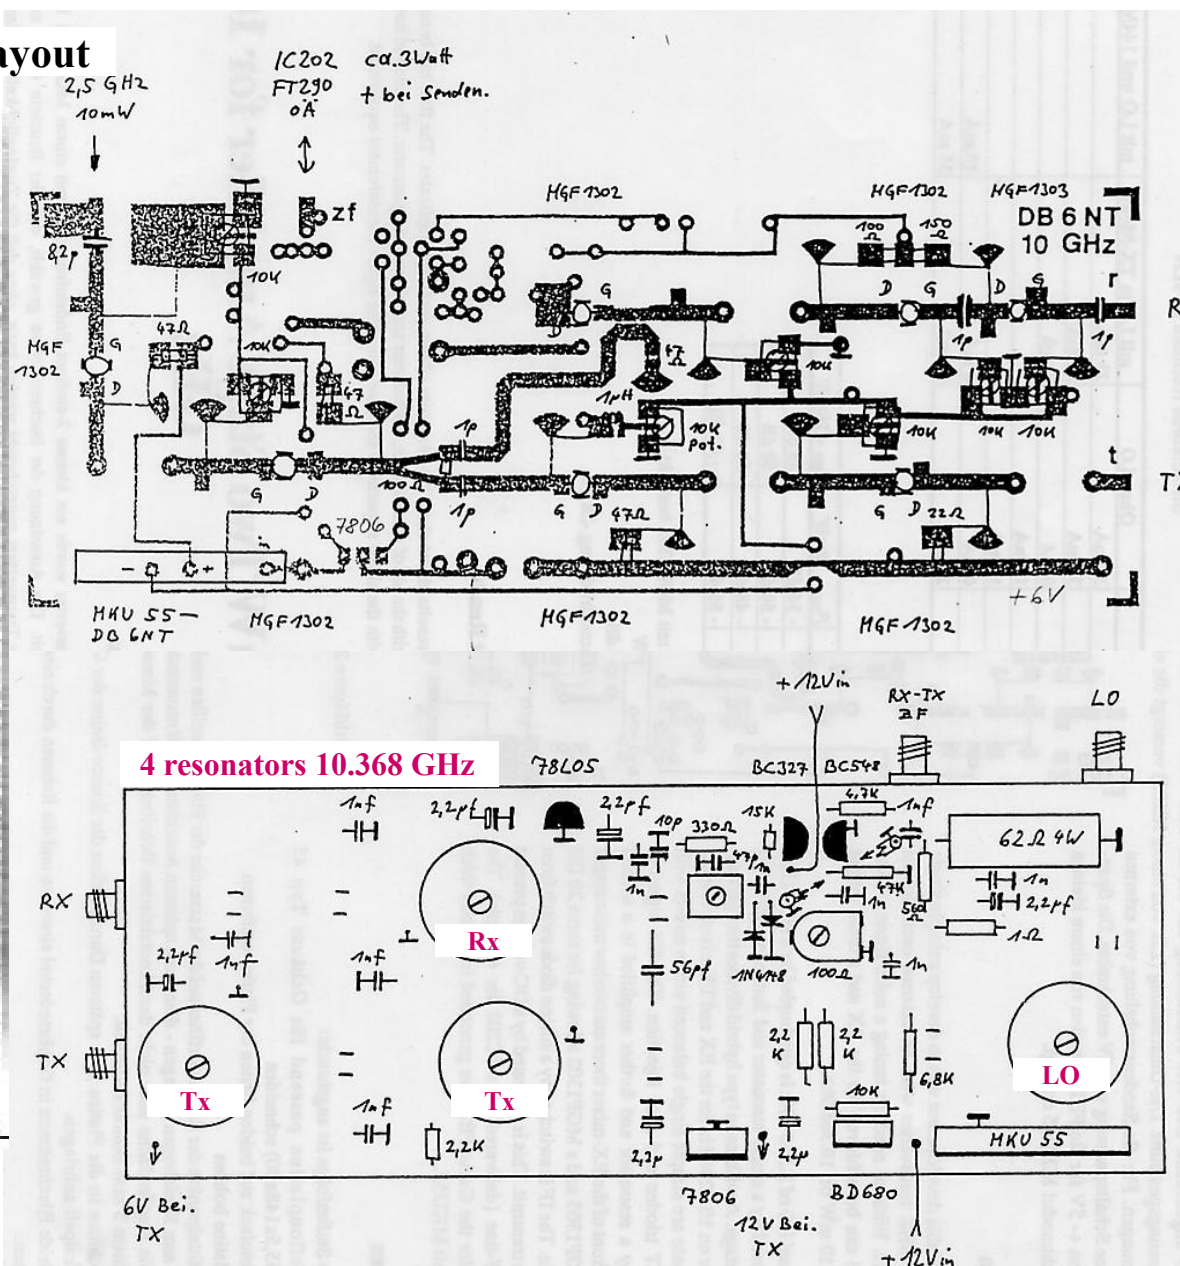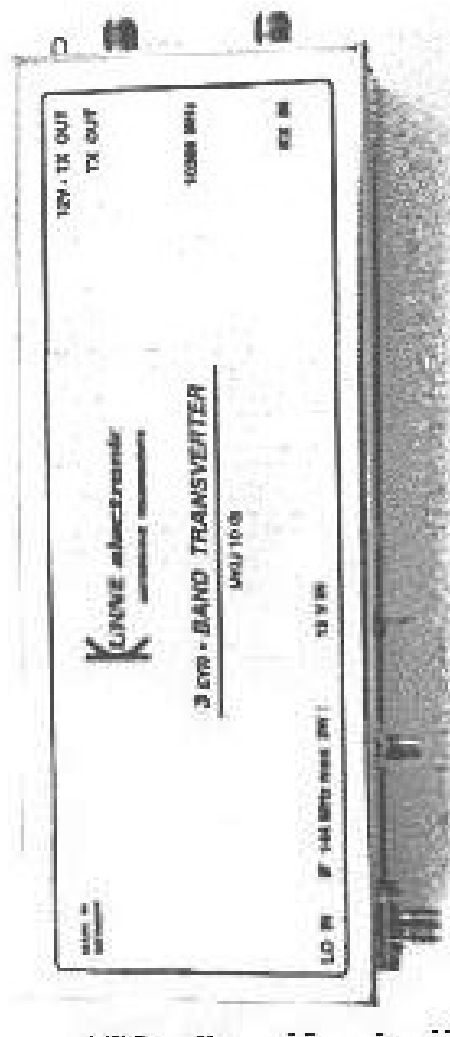
 $R \quad NF=3\text{dB}$ 

$\tau$ : Pout  
10 à 15mW




# 10 GHz DB6NT Transverter

Transverter version 1 hardware

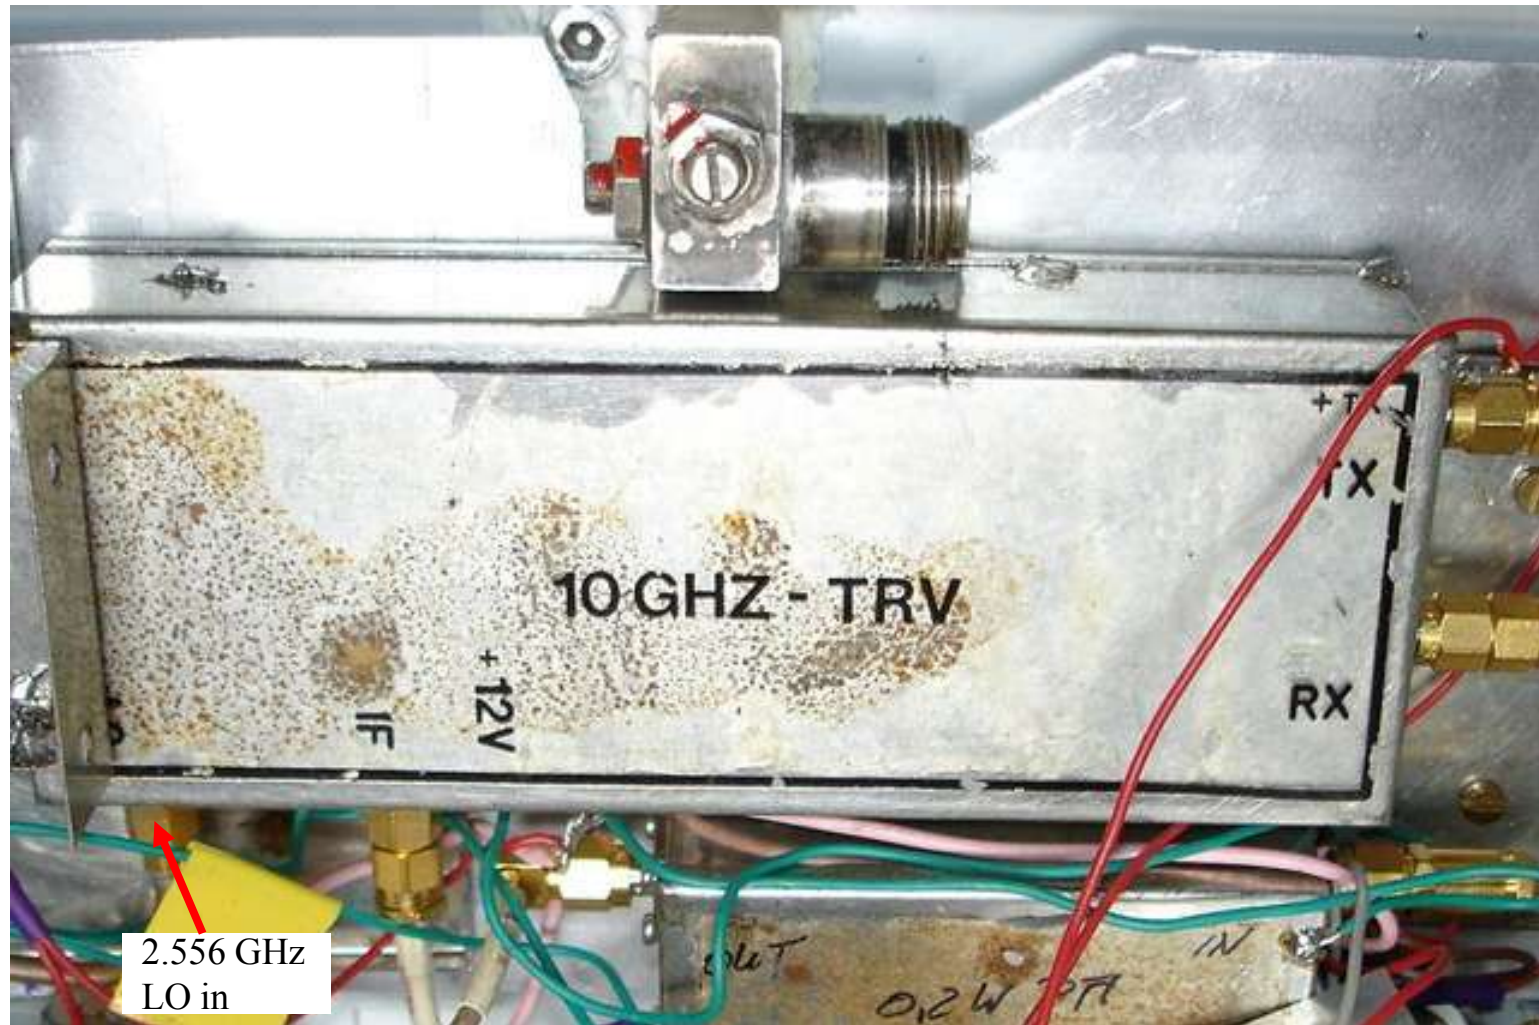

# 10 GHz DB6NT Transverter

## Outside 2.556 GHz MKU25 LO with 106.5 MHz quartz (x96 multiplier)

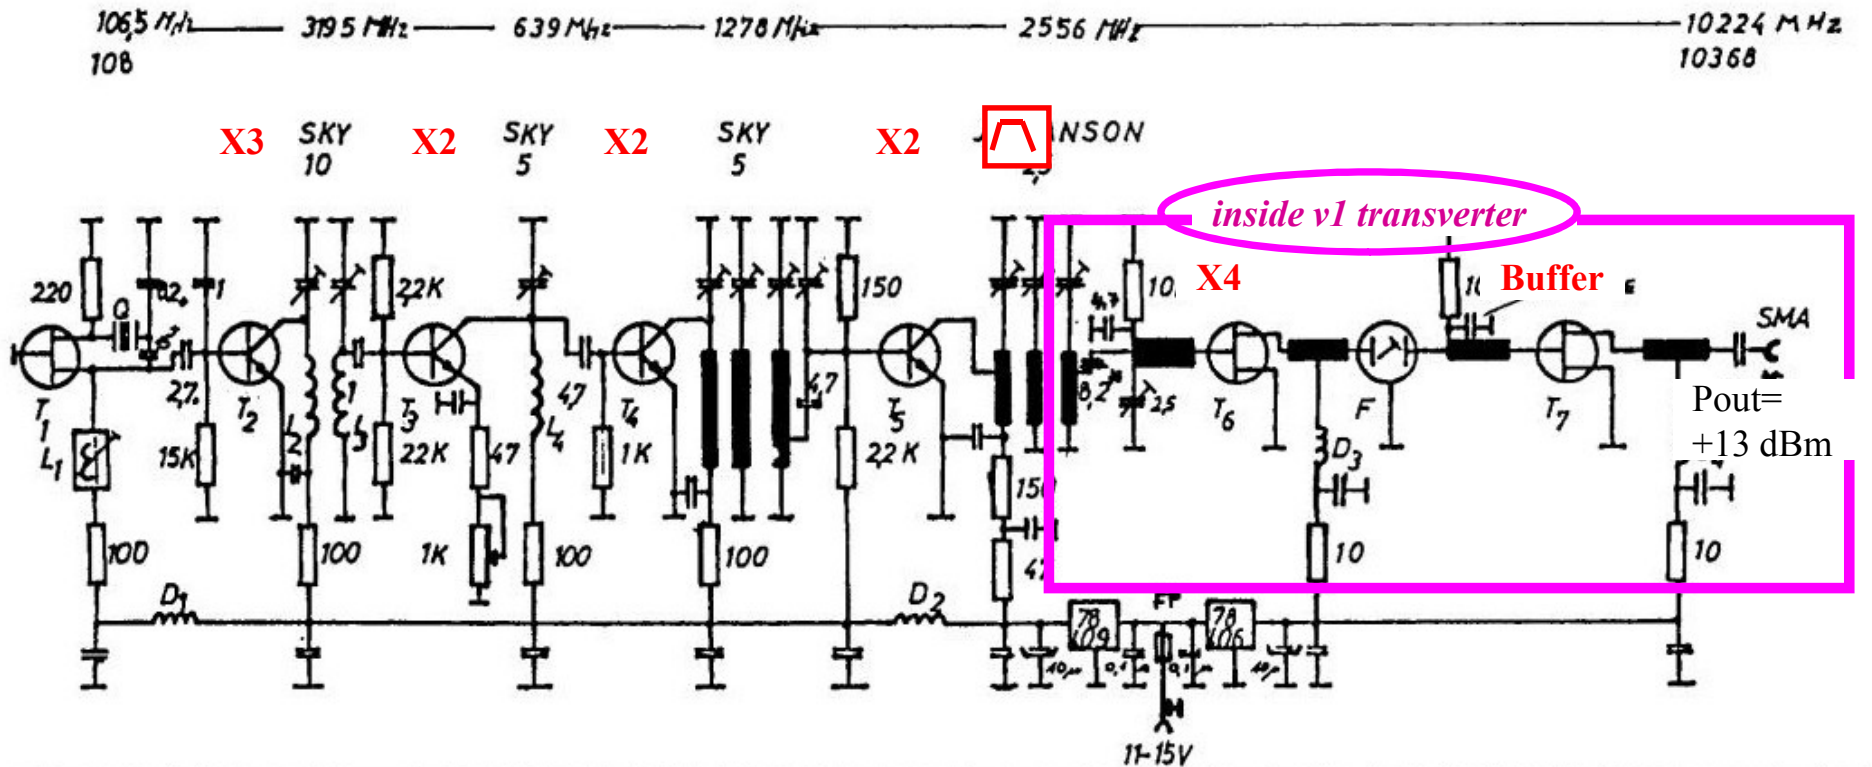

T <sub>1</sub>	U310
T <sub>2-3</sub>	BFR 90A
T <sub>4-5</sub>	BFG 91A
T <sub>6-7</sub>	MGF 1302

L NEOSID 5061 bl / br  
L 3Wdg 0,5<sup>ø</sup> 3<sup>ø</sup> DORN  
L 1 " " " "  
D1-2 FERRITPERLE 3Wdg  
D3-4 " "


C\* N750 lila  
C. 2,5mm Raster  
C o.Bez. 1nF  
C 8,2\* CHIP weiß!  
sonst alle C u. R SMD

$$P_{OUT} \approx 20\text{mW}$$

DJ 6 JJ  
1/87

# 10 GHz DB6NT Transverter

**1st alternative** to constant LO drift with temperature: JWM Model 2556-ALN phase locked oscillator, with 10 MHz external disciplined LO

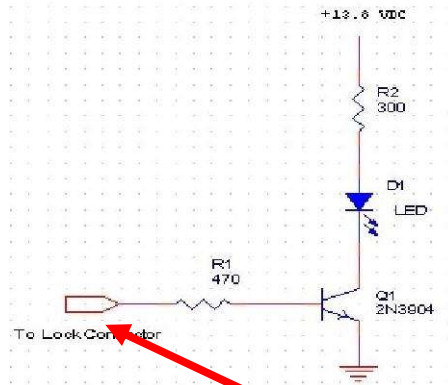

Ext lockin output

10 or 100 MHz ref in  
(OCXO, Rubidium or GPS ref)

Price 289.95 \$ = 197 €

<http://www.jwmeng.com/model2556ALN.html>

F5DQK April 2014

Getting started on 10 GHz band - release 6

I=140 mA



2.556 GHz Pout= +17 dBm  
Requires a 10 to 12 dB attenuator



# 10 GHz DB6NT Transverter

**2nd cheaper alternative** to constant LO drift with temperature: the 2556 MHz **DF9NP** phase locked oscillator with 10 MHz internal or external locked LO

Compared with a normal 106.5 MHz PLVCXO, when locked with a 10 MHz OCXO it has a 24 times better stability versus temperature

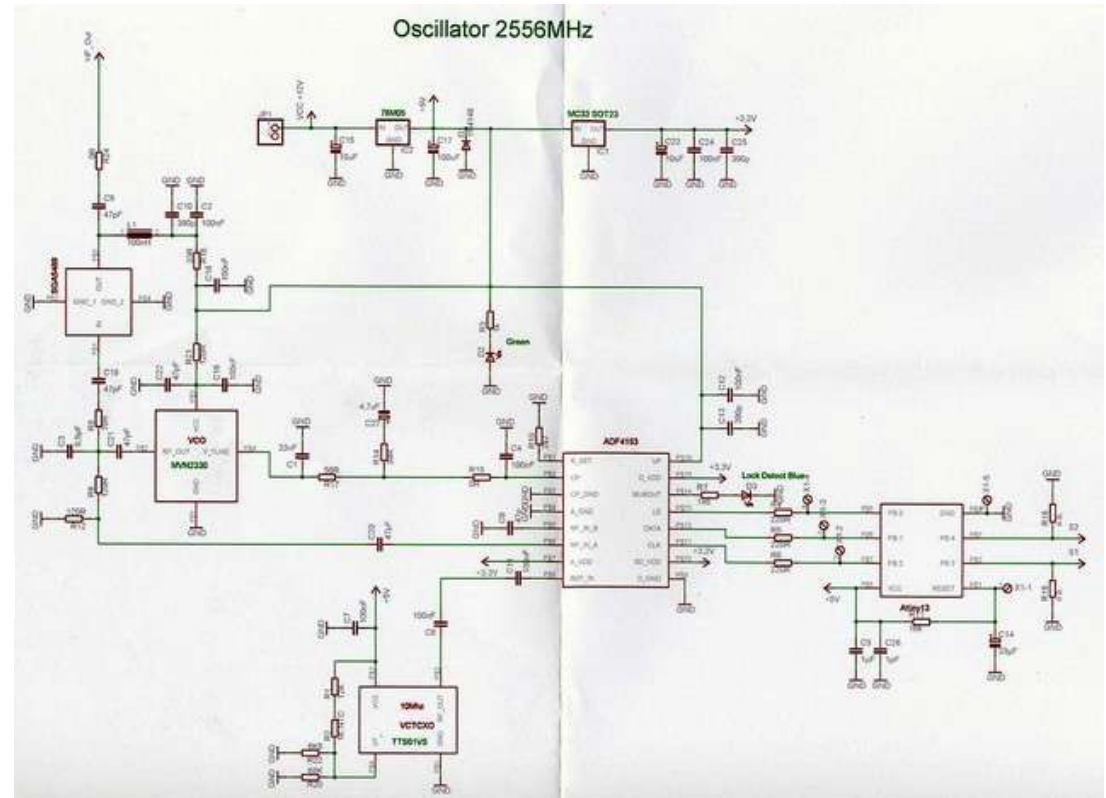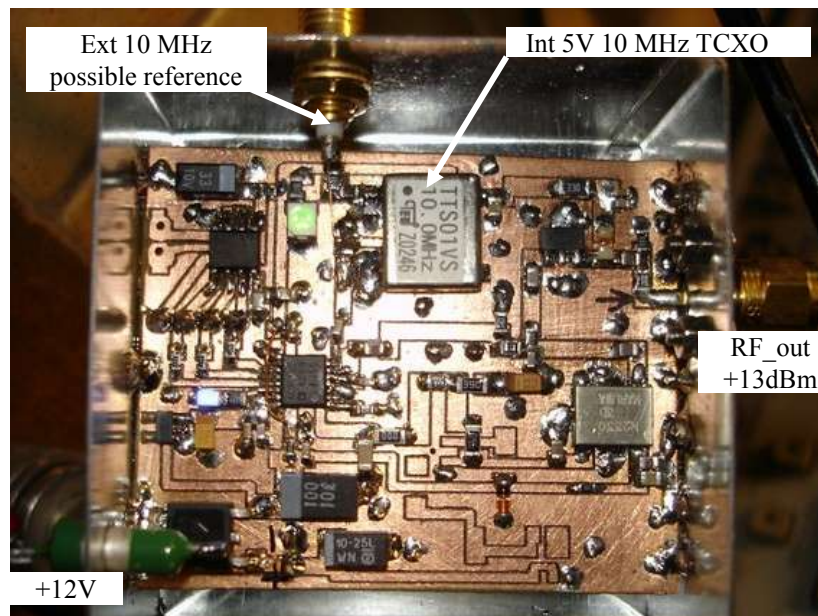

Either both locking possibilities were tried specifically with this PLL :

- internal TXCO : perfect for portable operation

**Or**

- external OXCO or GPSDO : perfect for indoor beacon monitoring

**Never connect both 10 MHz outputs together !**


More infos ? Dleupold at t-online.de

**F5DQK April 2014**



# 10 GHz DB6NT Transverter

DF9NP's meases with internal TXCO

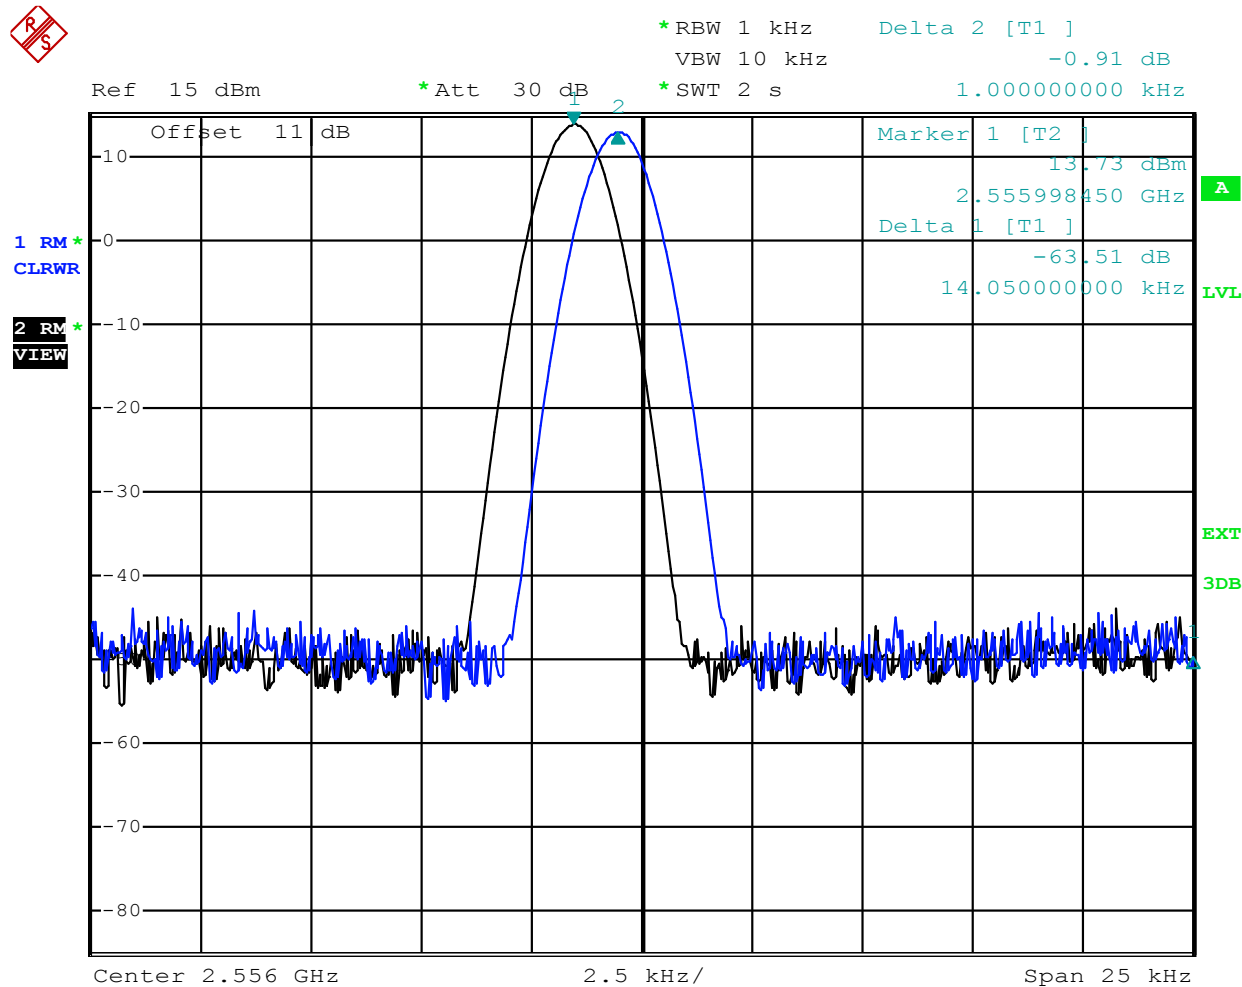

Date: 3.OCT.2012 03:18:38

F5DQK April 2014




Getting started on 10 GHz band - release 6



# 10 GHz DB6NT Transverter


5 to 200 mW first amp

16 dB gain

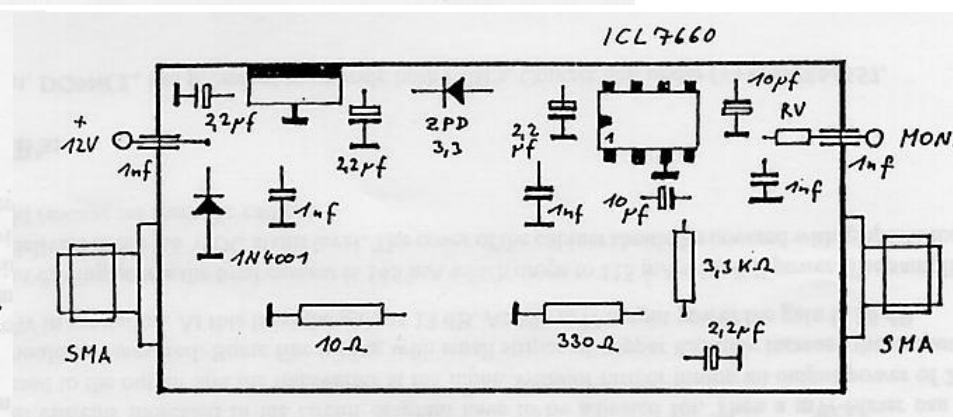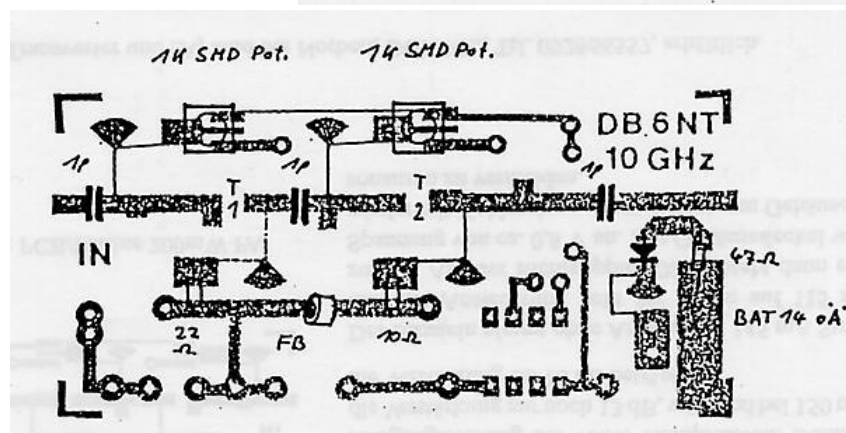
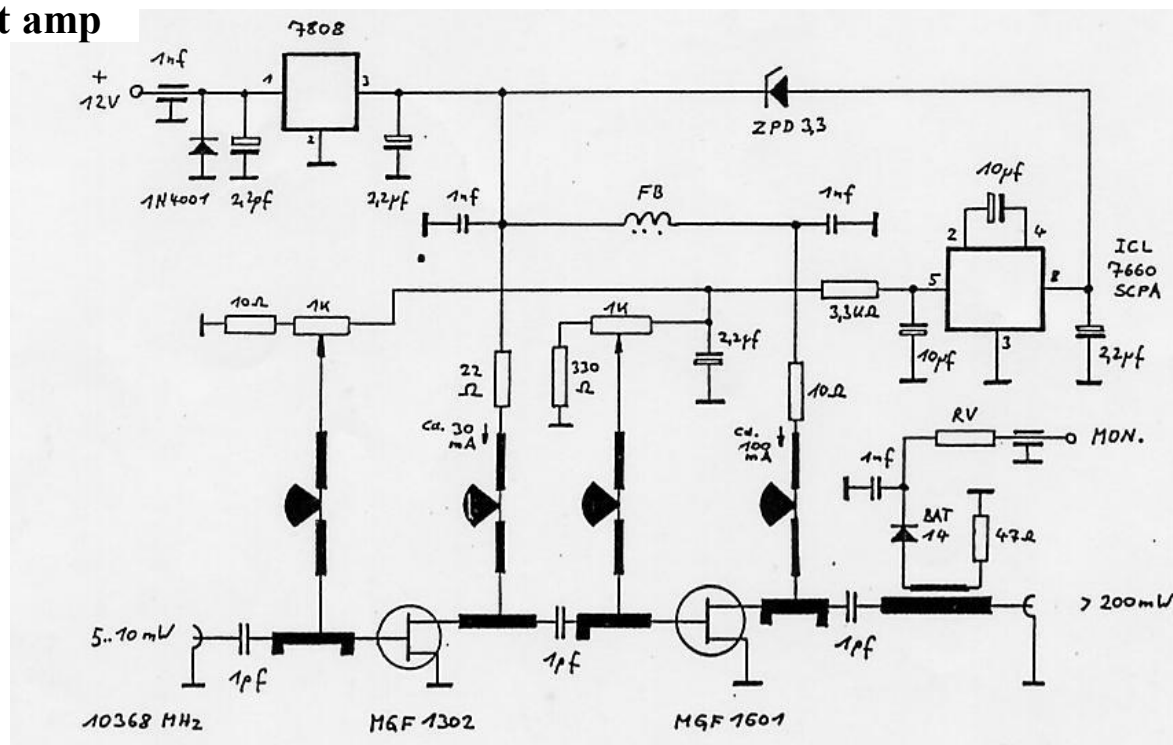


# 10 GHz DB6NT Transverter

HEMT Nf=1 dB, gain=24 dB DG1VL preamp

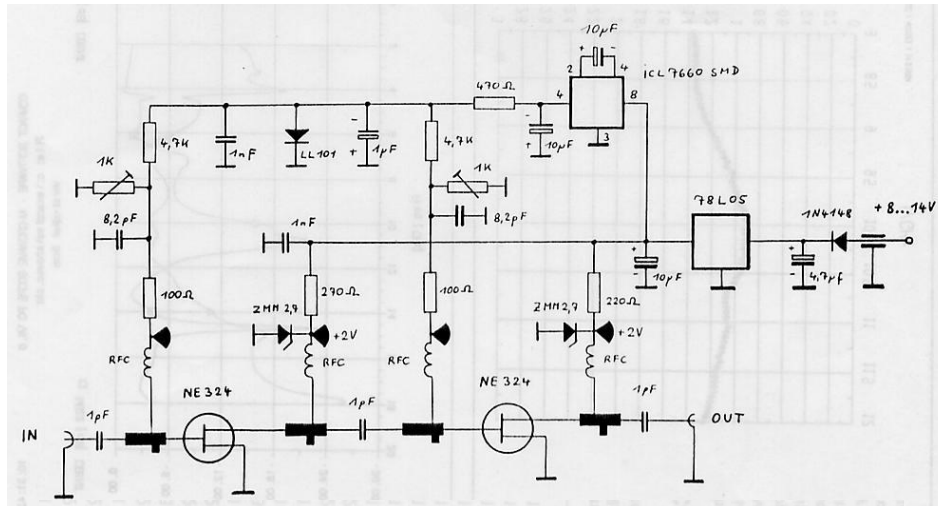

**Measured**  
**22.8 / 1.15 dB à 10.37 GHz**

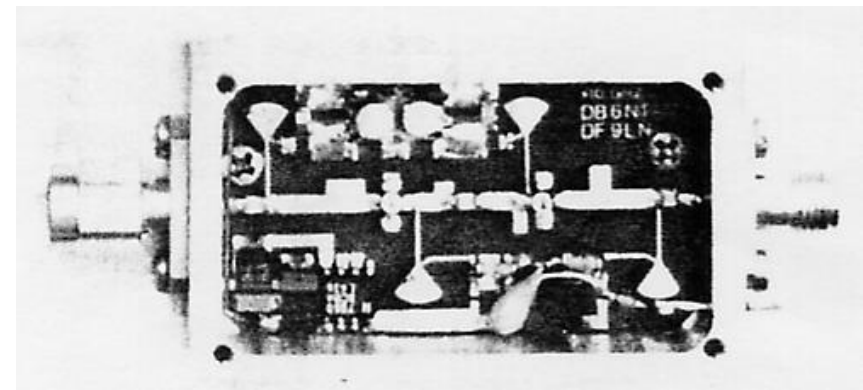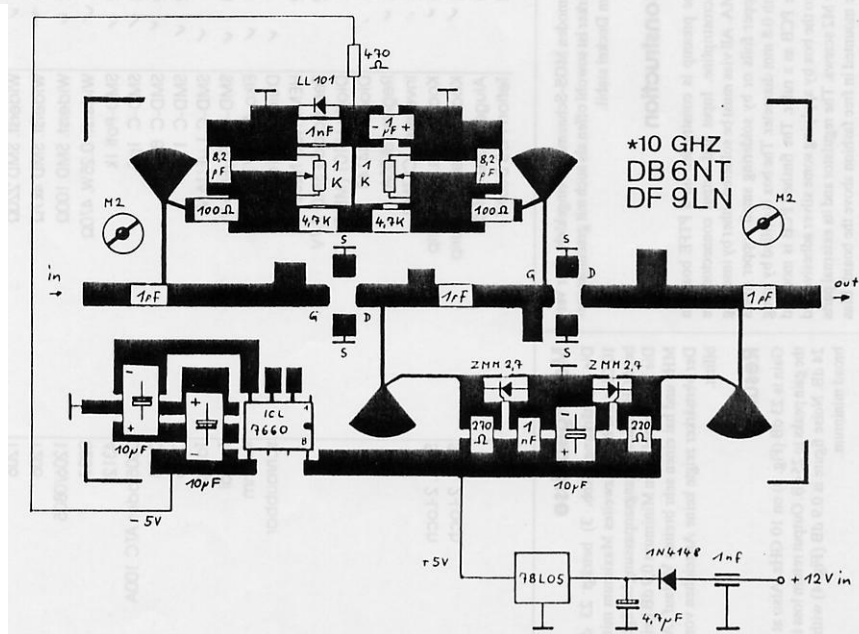

# 10 GHz DB6NT Transverter


DG1VL HEMT preamp, gain=24 dB, Nf=1.3 dB






# 10 GHz DB6NT Transverter

## Principle of my assembly

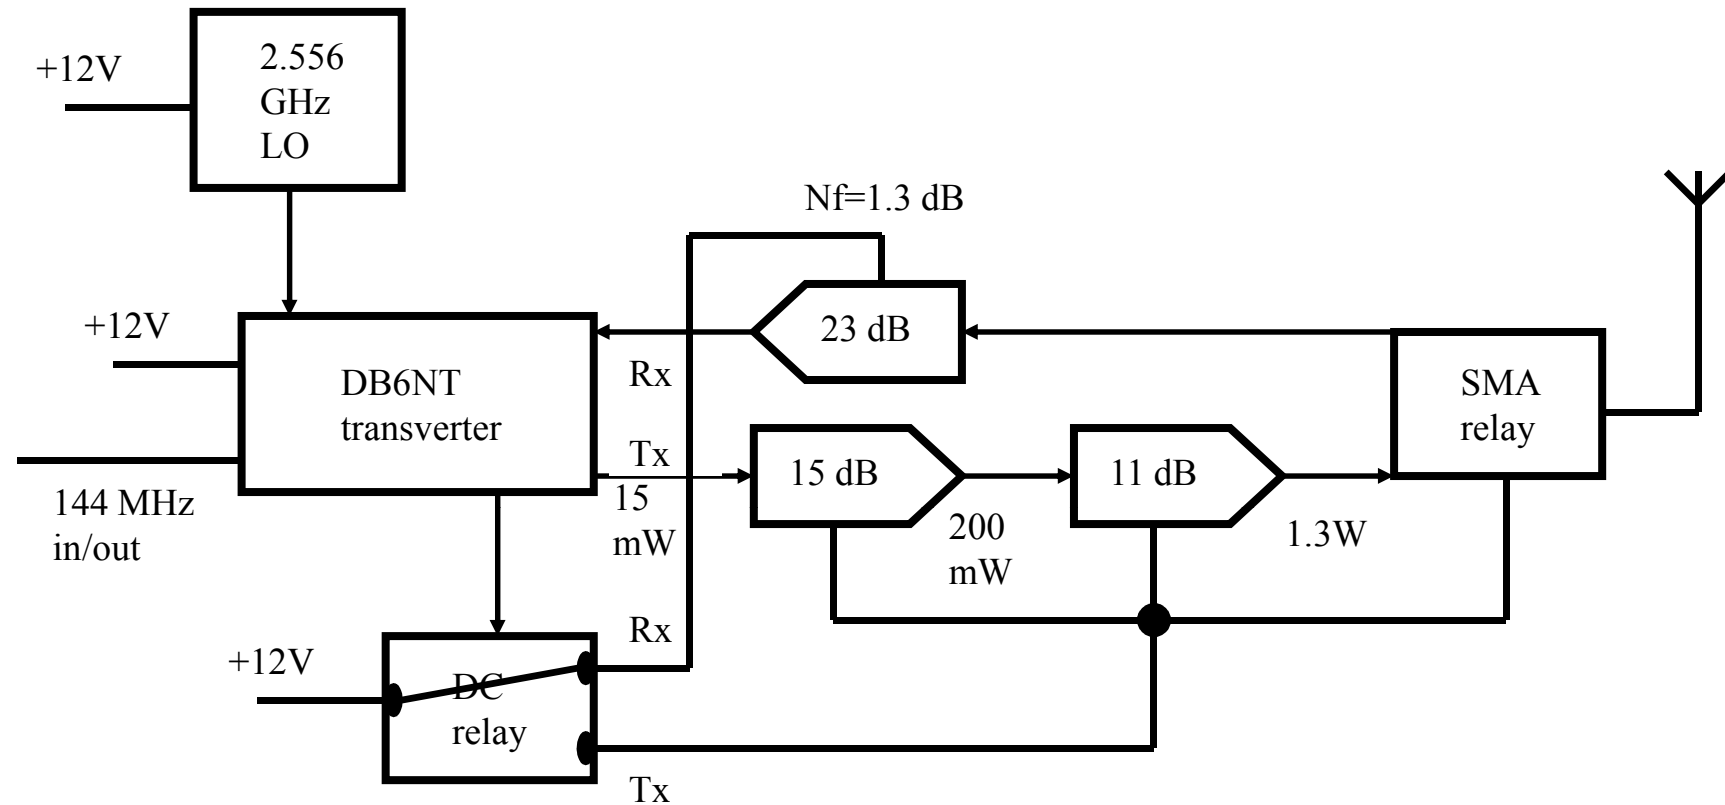

# 10 GHz DB6NT Transverter


## 10 GHz transverter inside view

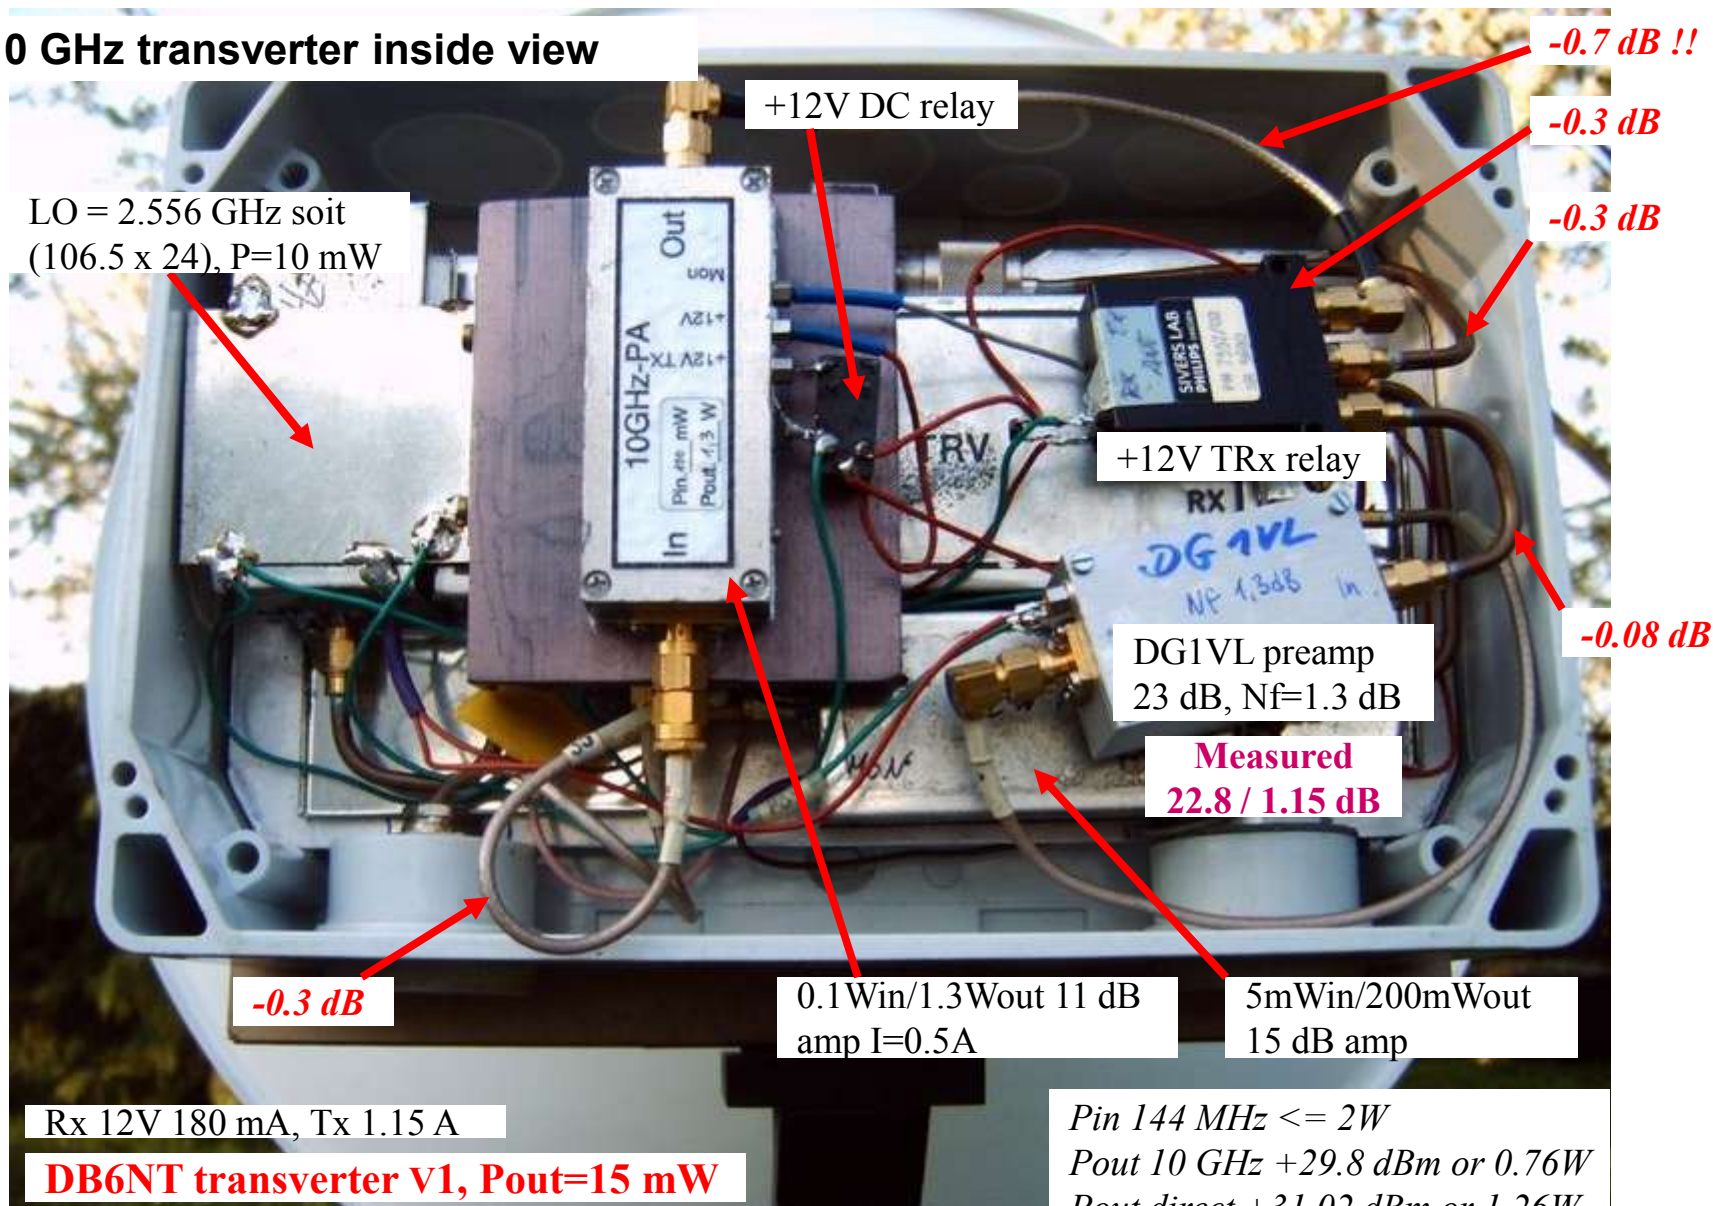

# 10 GHz DB6NT Transverter

10 GHz transverter : how getting 0.5 dB more on Tx

*-0.18 instead of -0.7 dB*

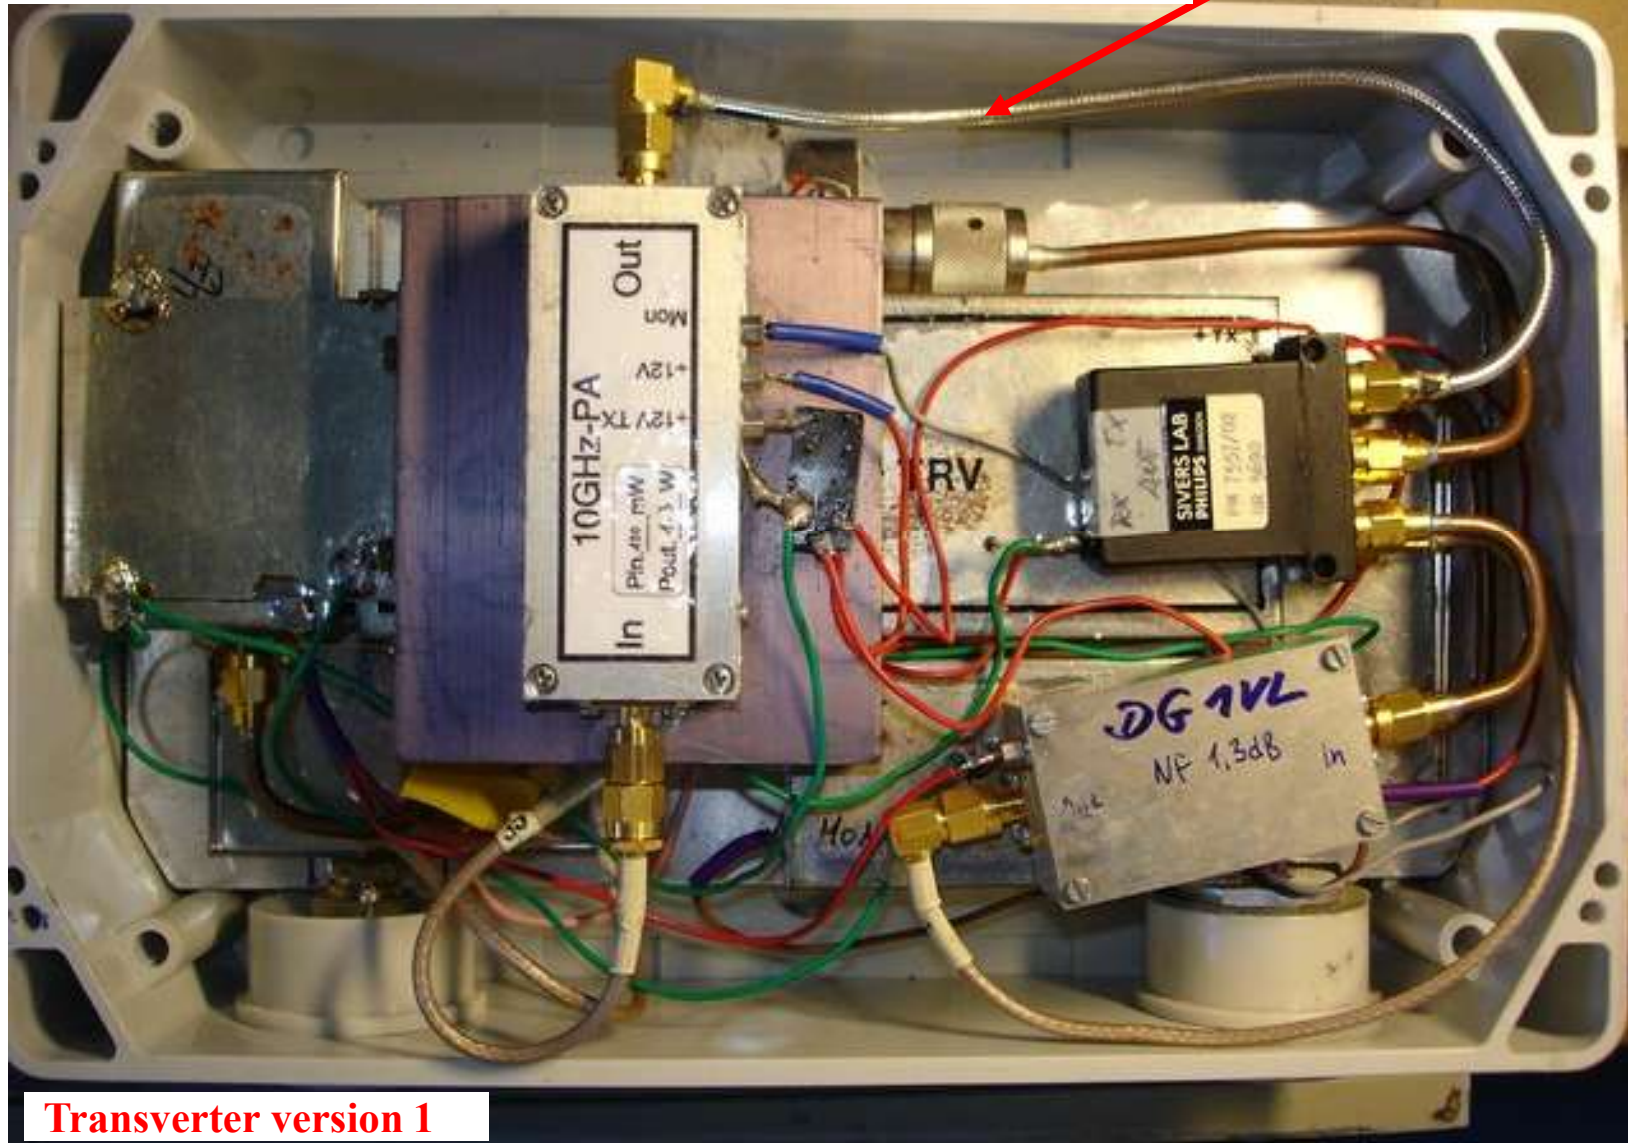

**Transverter version 1**



# 10 GHz DB6NT Transverter

**10 GHz transverter : DC and RF measures**

***Oscillator drift after ½ hour heating compared to F5XBD/b 77 frequency***

Température (°C)	10°	15°	20°	25°	30°
Drift compared to F5XBD/77 frequency (kHz)	?	?	+10	0	-10

$$\Delta F = 2 \text{ kHz/}^{\circ}\text{C}$$

***DC measures with V=12V and short DC cables***

- Rx 180 mA
- Tx, 1.15A

***DC measures after 25M DC of 2x1.5 mm2 cable in tX mode***

$$\Delta V = - 0.52V$$

***RF measures***

Pin 144 MHz <= 2W

Pout before guide transition +31.02 dBm or 1.26W

## **3b- 10 GHz DB6NT transverter vers 2**

- Totally indoor 10.224 GHz LO with 106.5 MHz quartz**
- PTT : positive voltage on 2M coax and « normal » ground**
- External 106.5 MHz LO input for far better stability**
- Pout = +23 dBm or 200 mW**


# 10 GHz DB6NT Transverter

Transverter version 2  
(2003)

10 GHz Transverter MK2 DB 6 NT 11.2003

10368 / 144 MHz

Bild / Figure 1

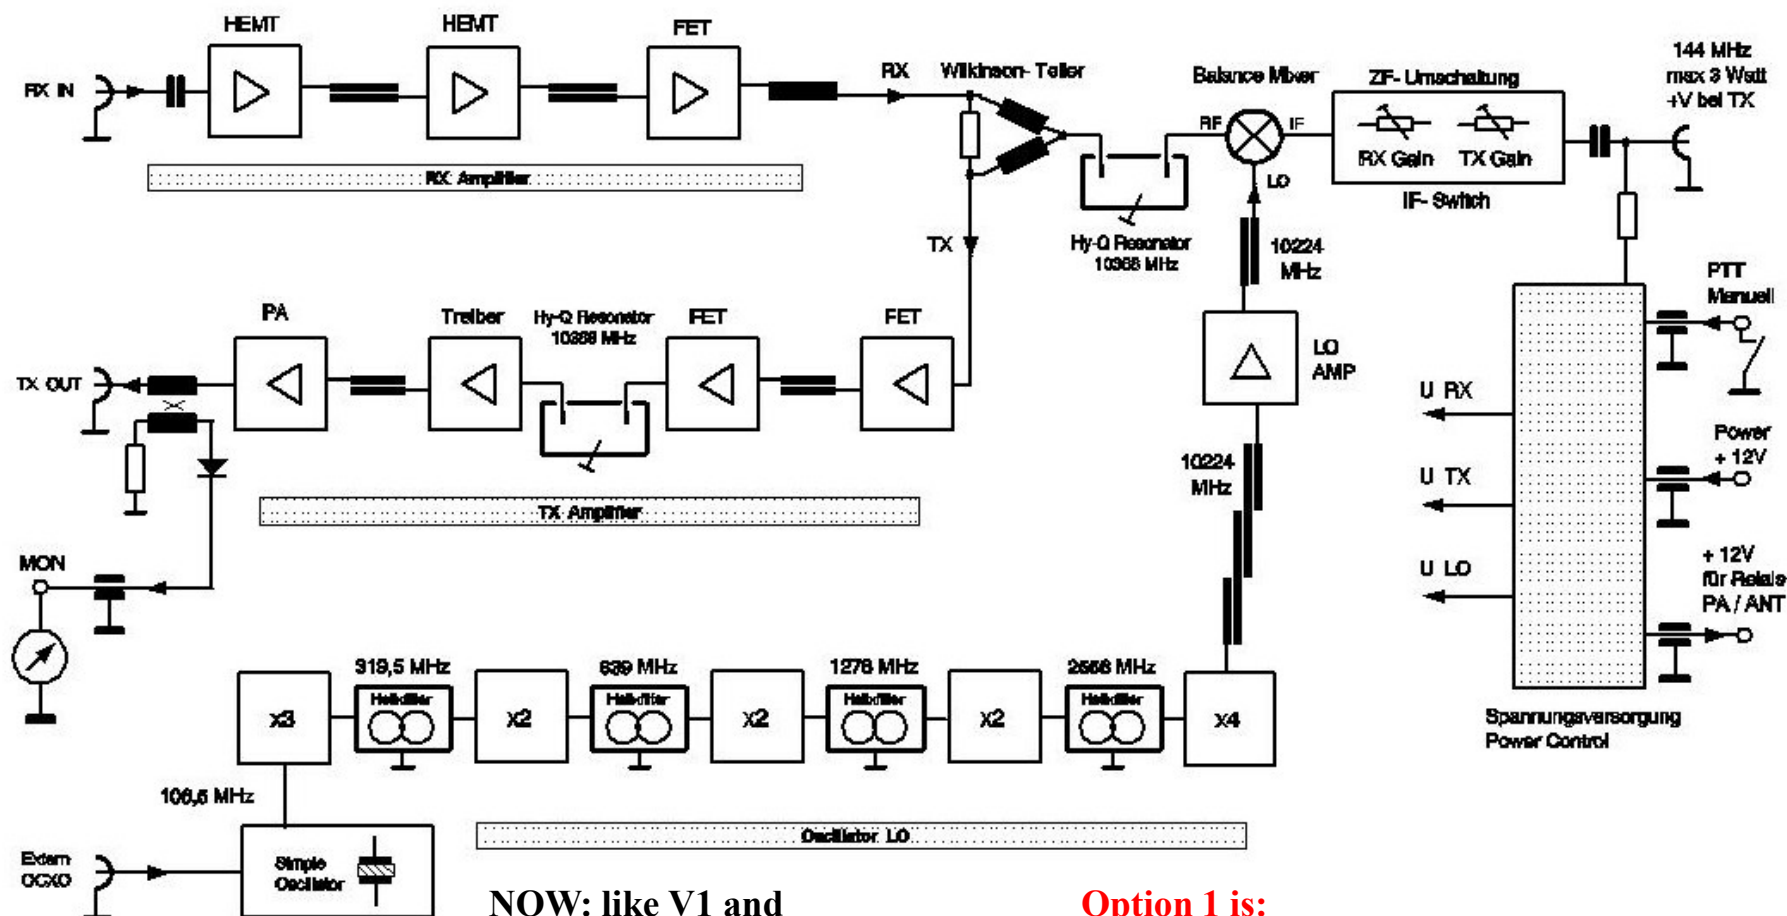

NOW: like V1 and  
-Pout=200 mW, nF=1.2 dB  
-LO totally on same board

Option 1 is:  
-106.5 MHz external ocxo fitting a  
subsidiary SMA connector




# 10 GHz DB6NT Transverter

## Transverter version 2 layout

10 GHz Transverter MK2 DB 6 NT 5.2004


**Bild / Figure 2**

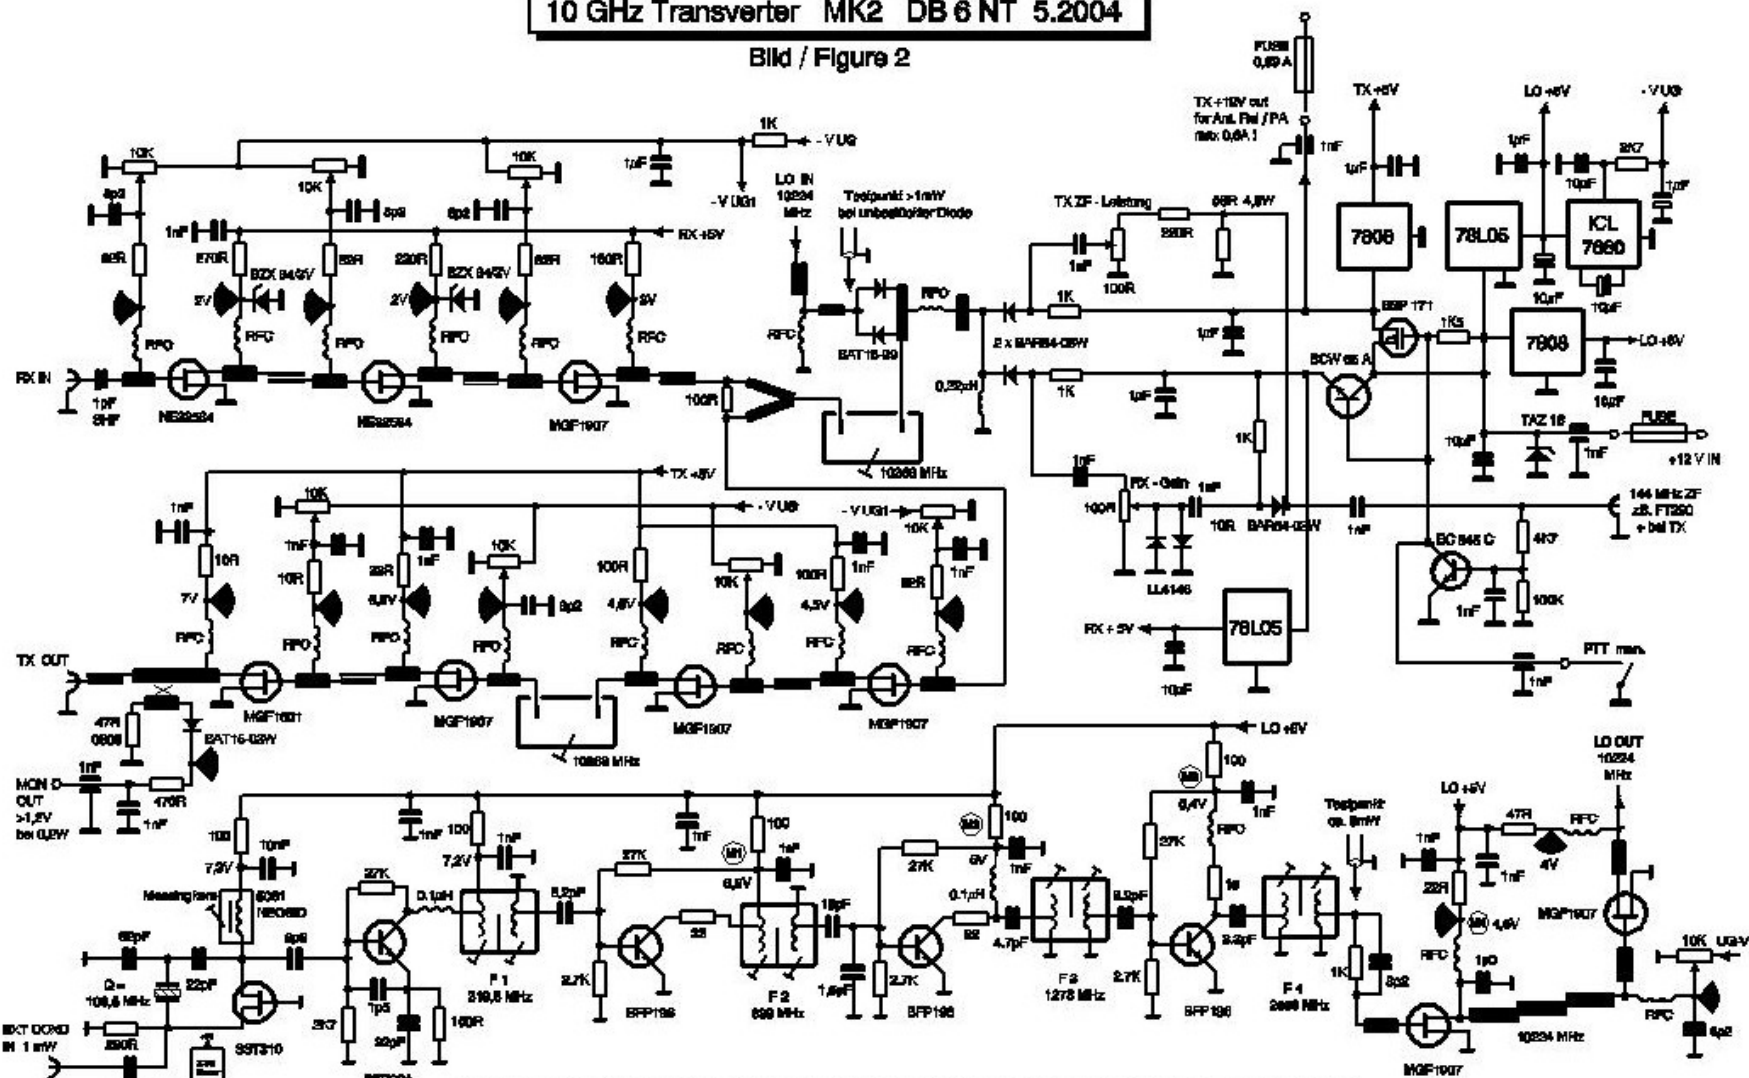

The voltage and power data are measured values of the prototypes. The data can differ widely due to component tolerances.


# 10 GHz DB6NT Transverter

## Transverter version 2 hardware

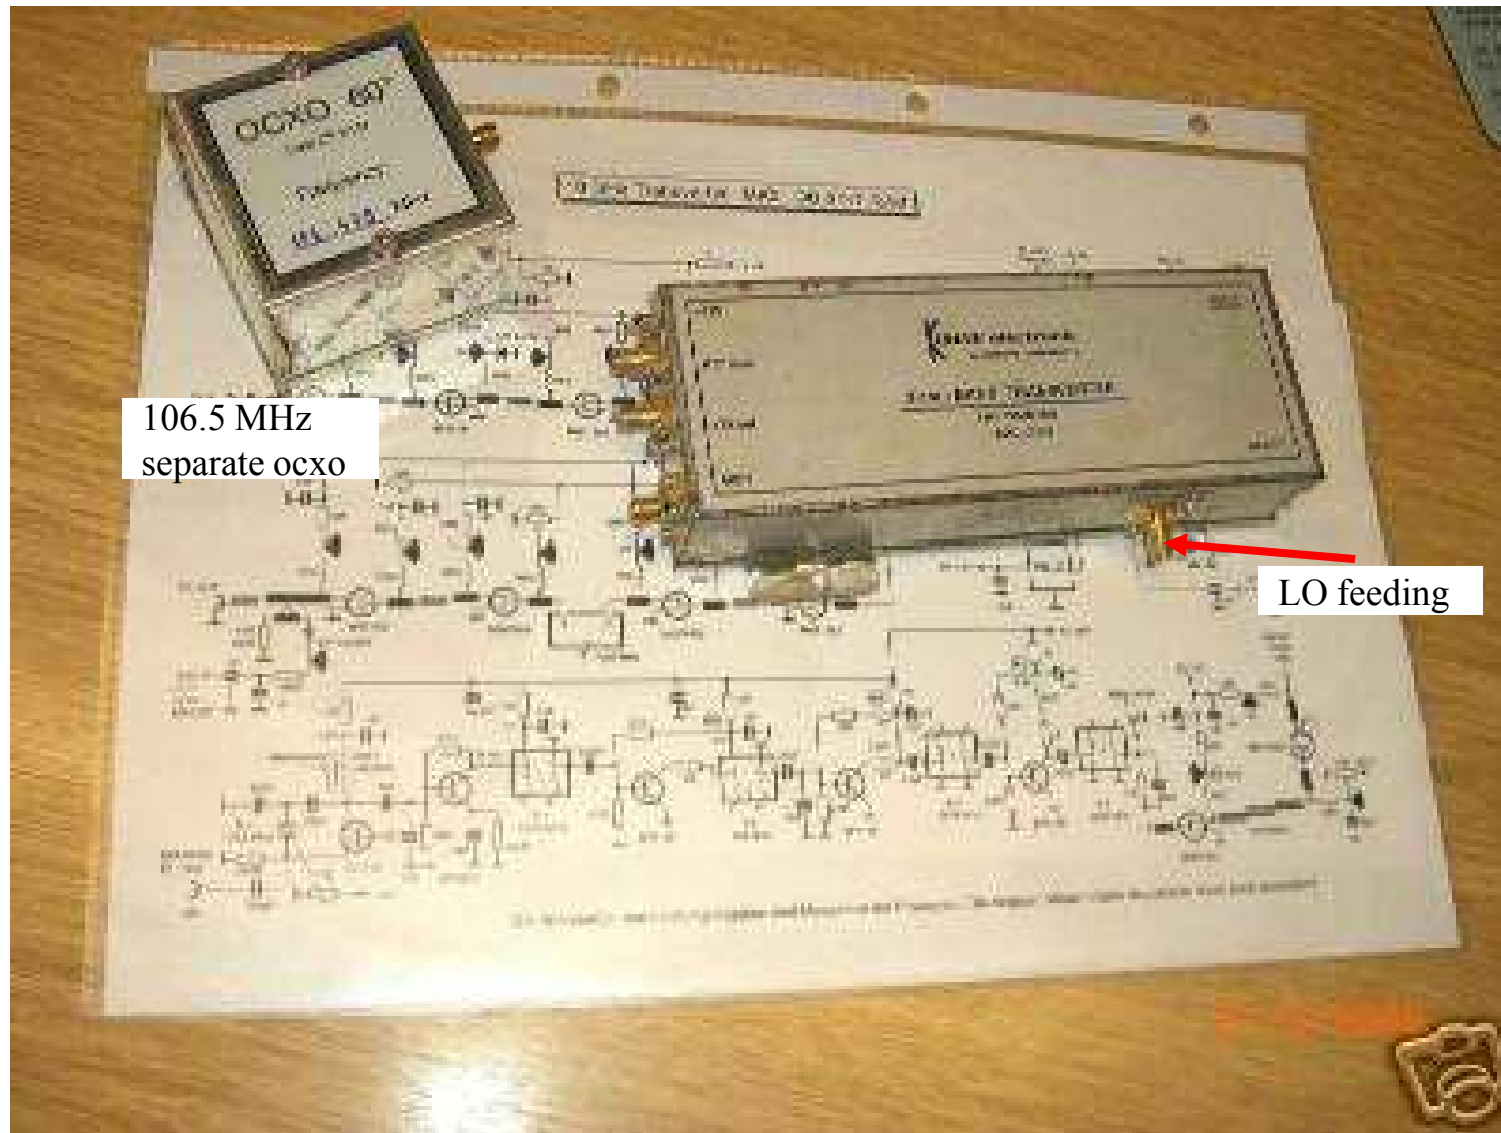

# 10 GHz DB6NT Transverter

## Transverter version 2 : optional 106.5 MHz 60°C ocxo schematic (Eisch-Kafka)

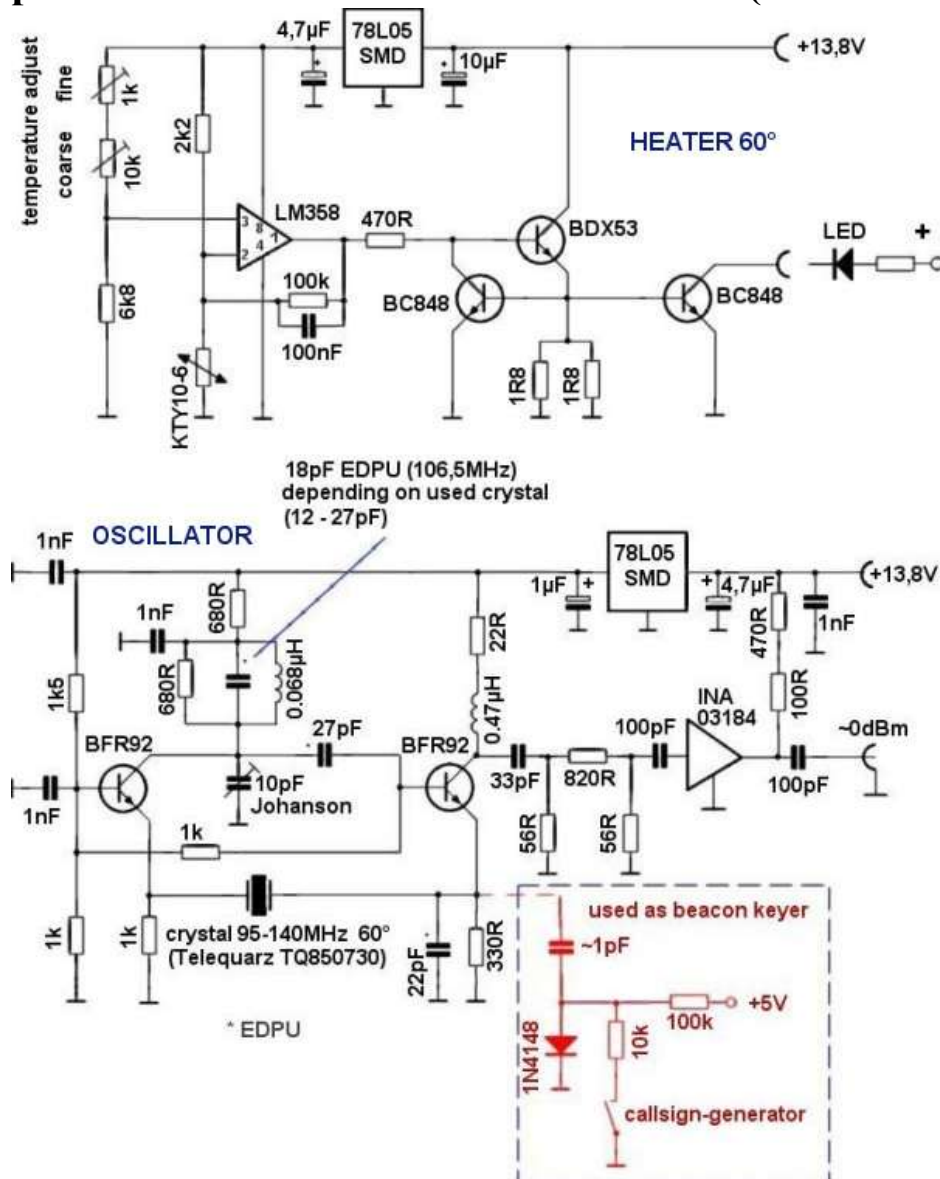



## **3c- 10 GHz DB6NT transverter vers 3**


- LO=106.5 MHz ocxo at 40°C**
- External 10 MHz ref input for rock stability (ocxo, rubidium or GPS)**
- Rx Nf improvement**

# 10 GHz DB6NT Transverter

**Transverter version 3  
(2007)**

10 GHz Transverter 10G3 DB 6 NT 12.2007

10368 / 144 MHz

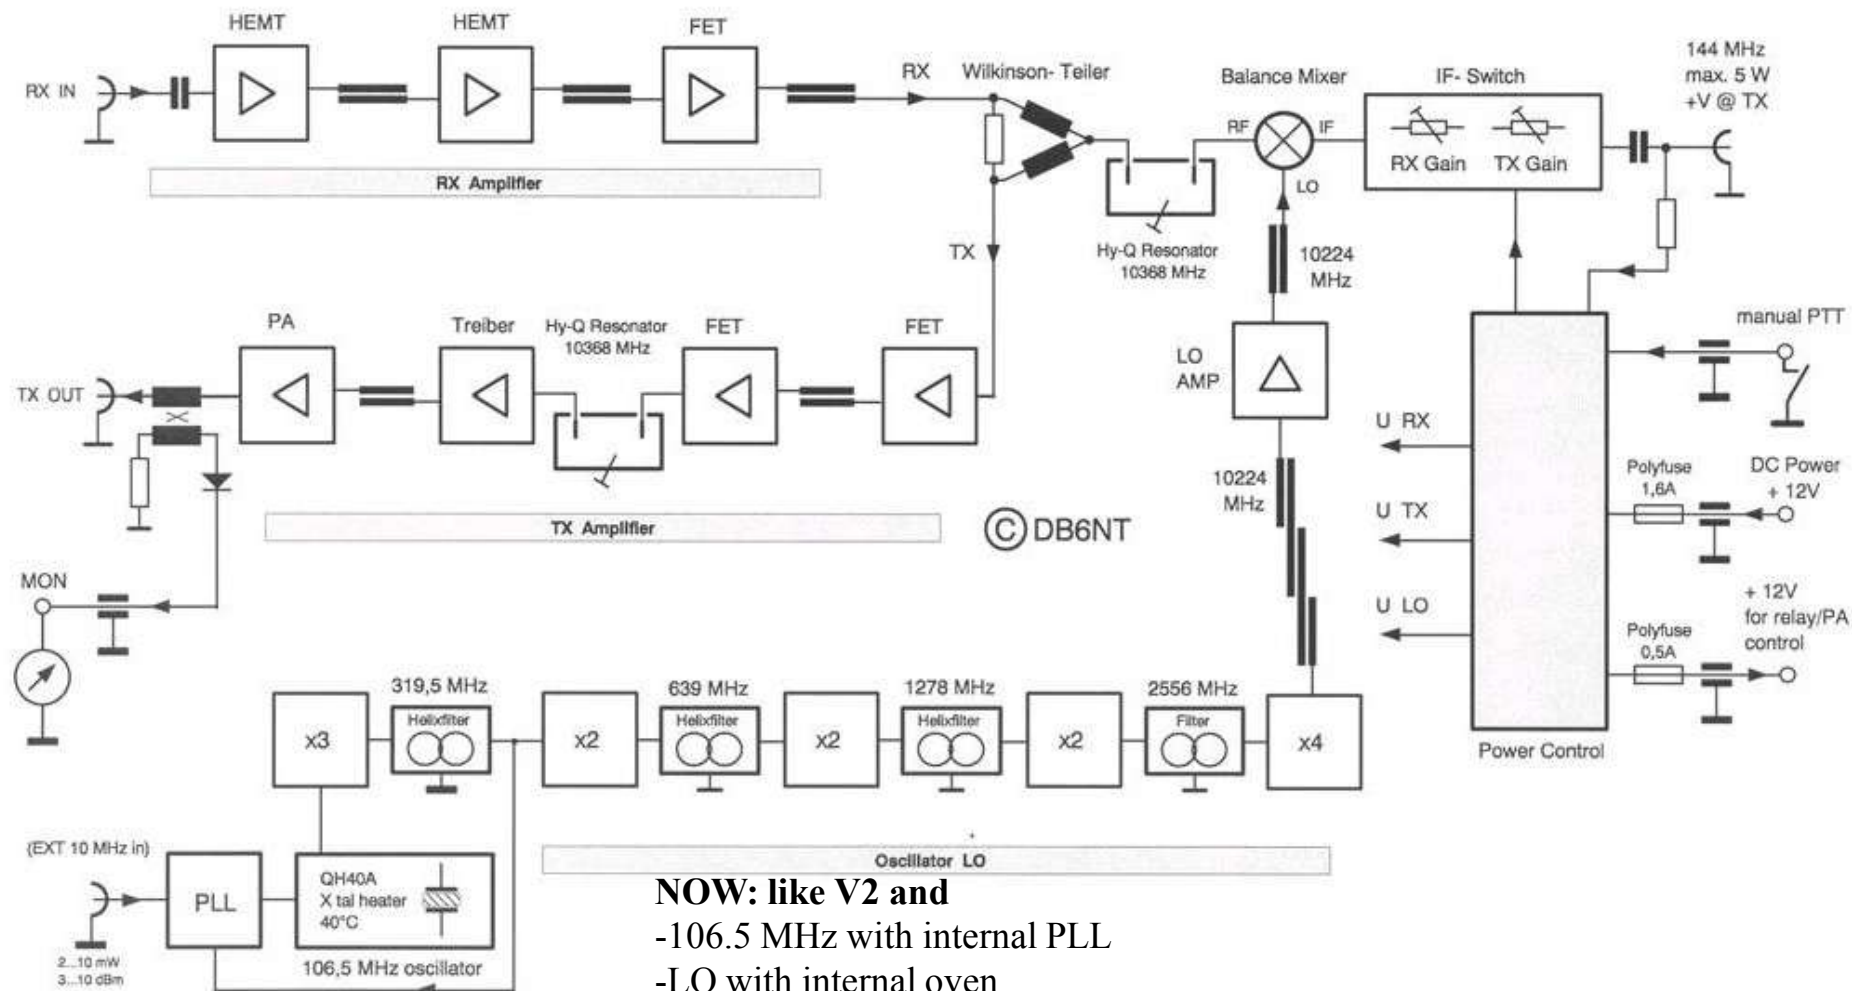

**NOW: like V2 and**

-106.5 MHz with internal PLL


-LO with internal oven

-Ext 10 MHz ref input for frequency stability like the GPS

*Getting started on 10 GHz band - release 6*

# 10 GHz DB6NT Transverter

Transverter version 3

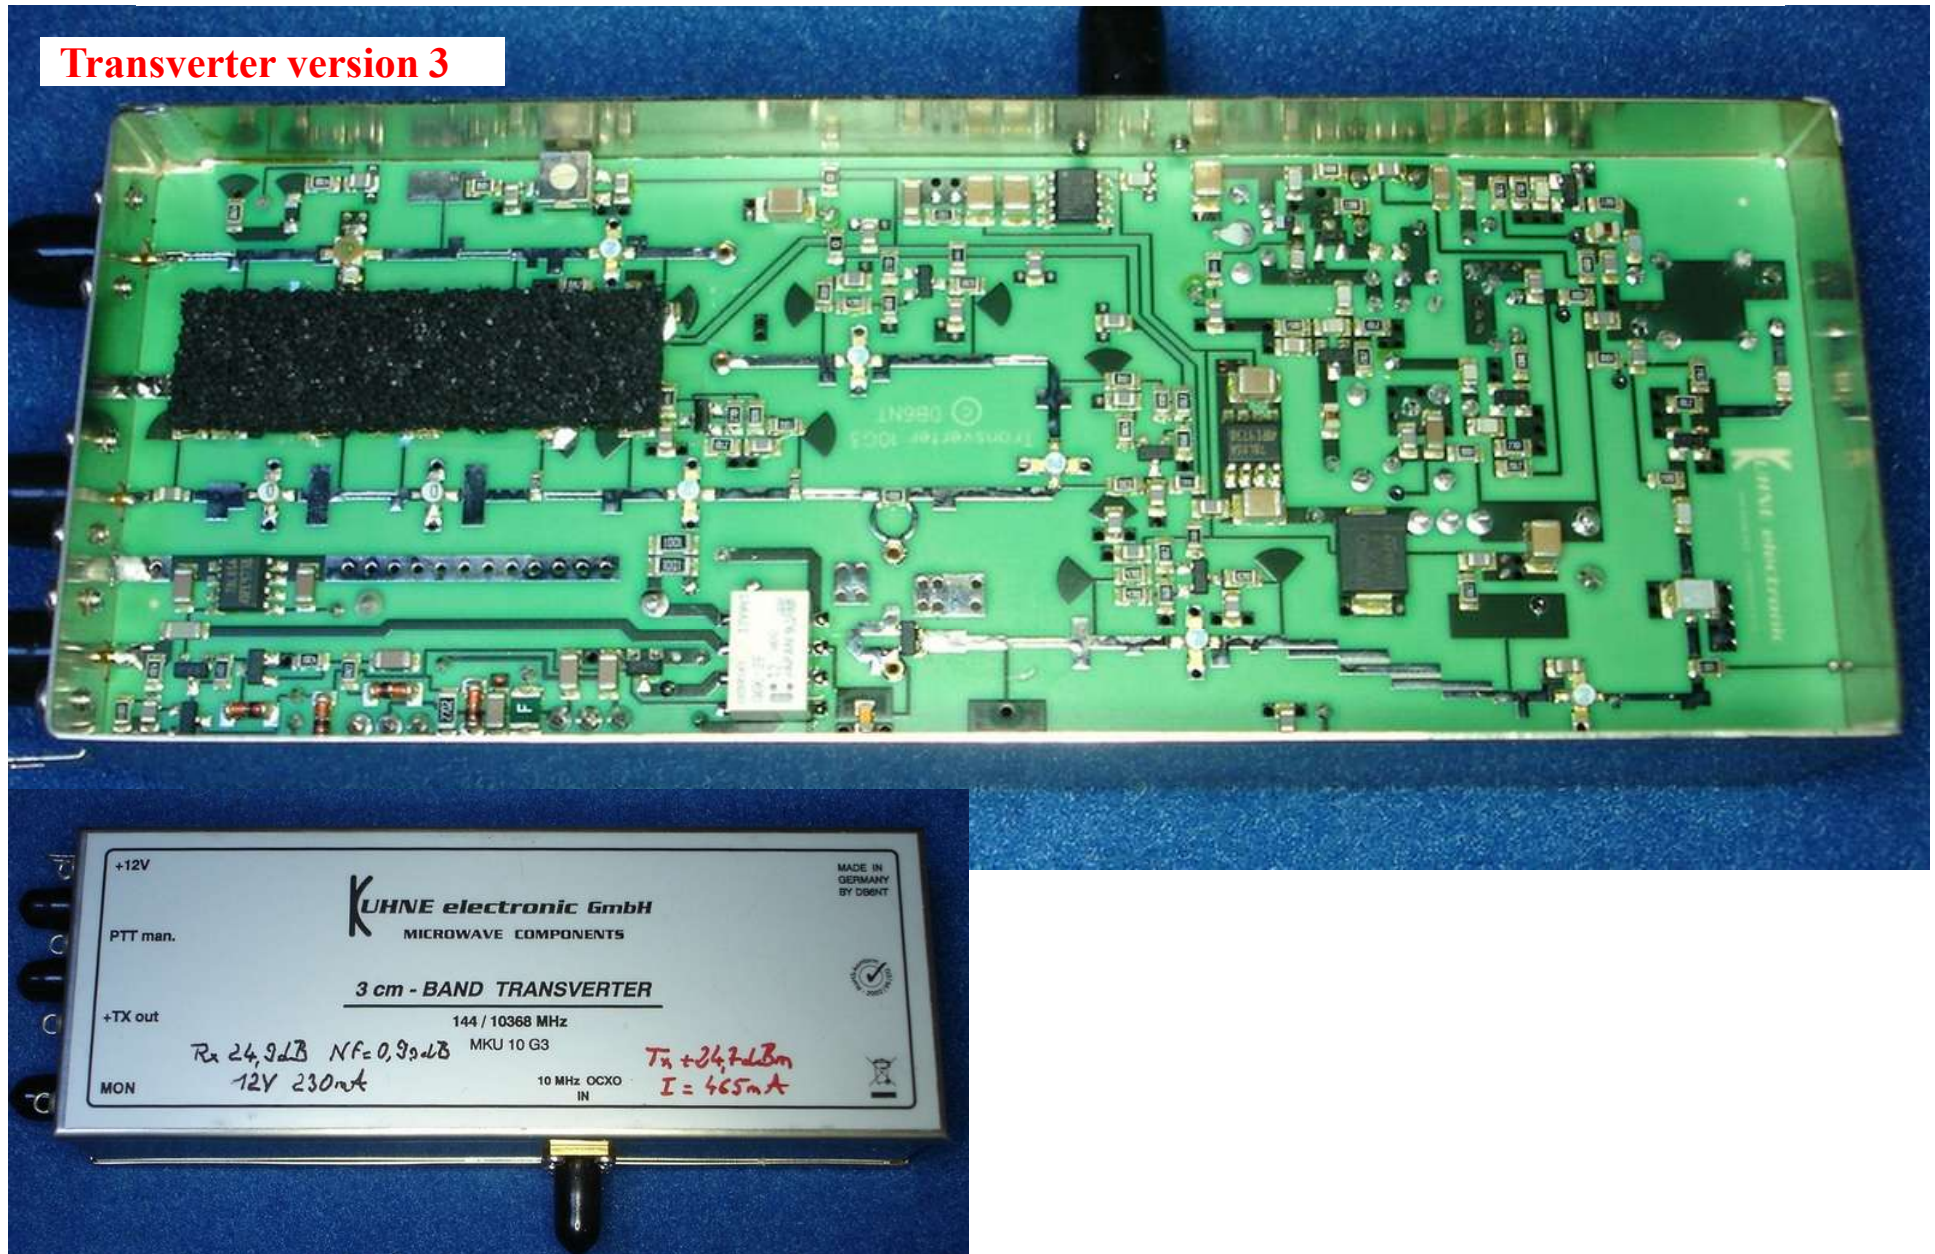

F5DQK April 2014


Getting started on 10 GHz band - release 6

## **4- 10 GHz indoor & outdoor tryings**




# 10 GHz DB6NT Transverter

First RS tryings with open window in the shack room

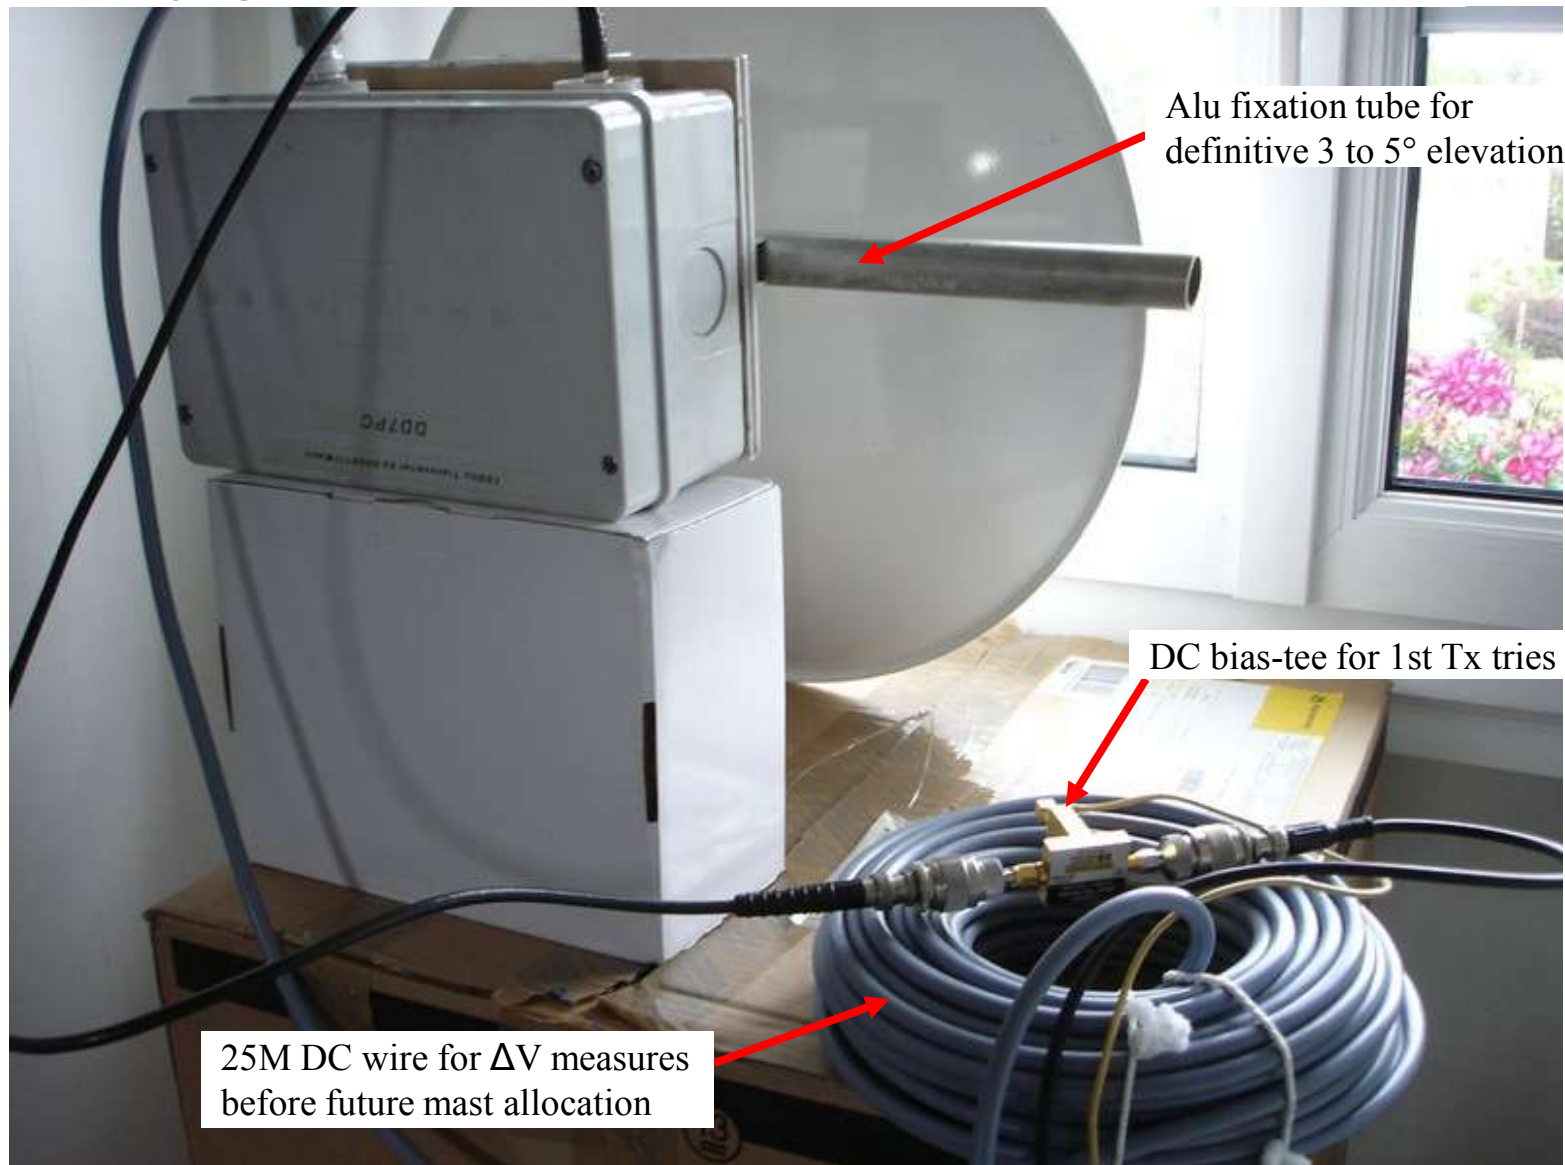

# 10 GHz DB6NT Transverter

## Transverter DC pinning

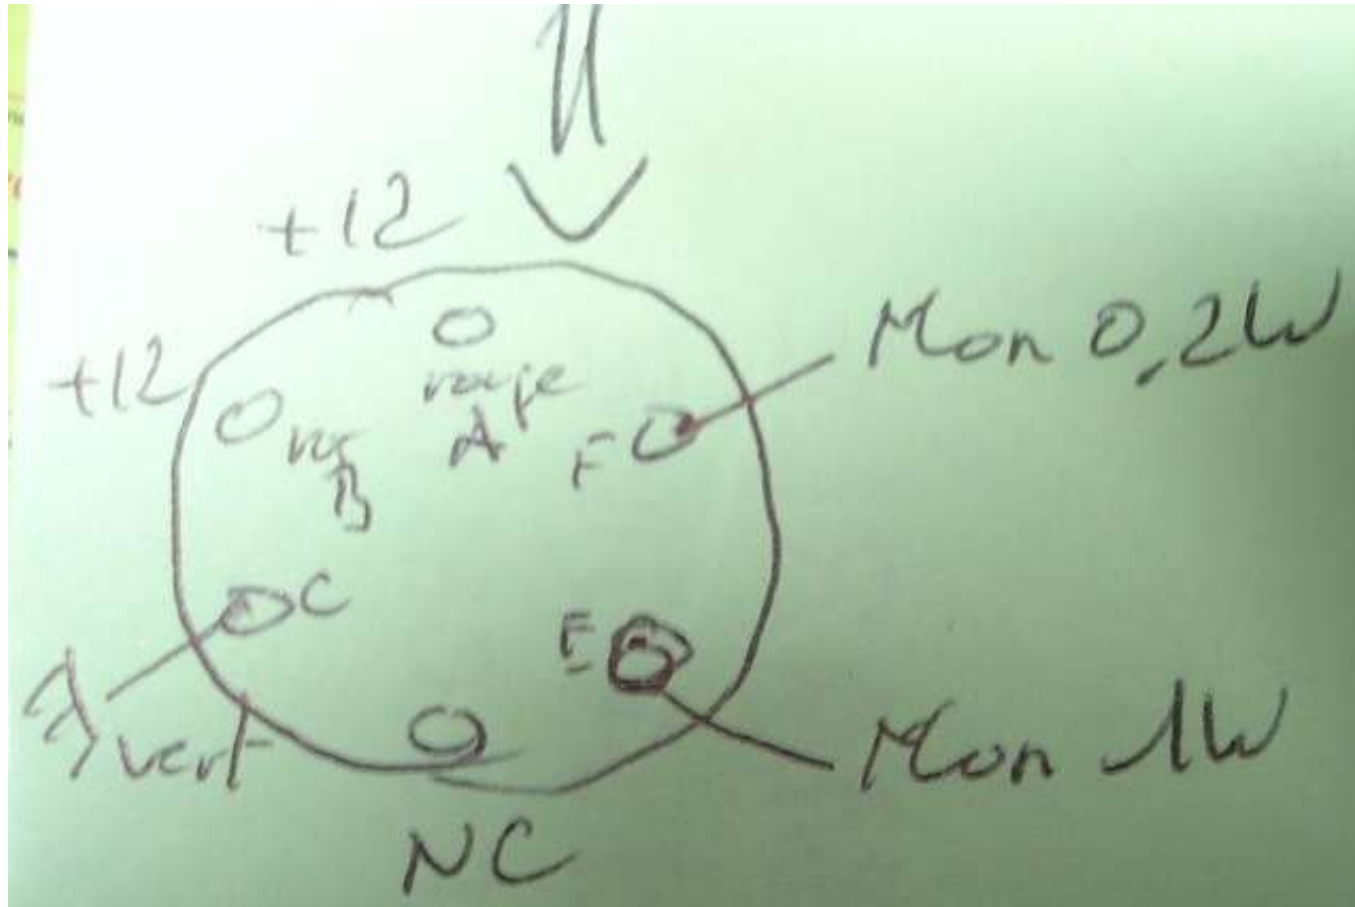

# 10 GHz DB6NT Transverter

Summer configuration « complement »




*F5DQK April 2014*

*Getting started on 10 GHz band - release 6*

# 10 GHz DB6NT Transverter

Zoom on 10 GHz ensemble

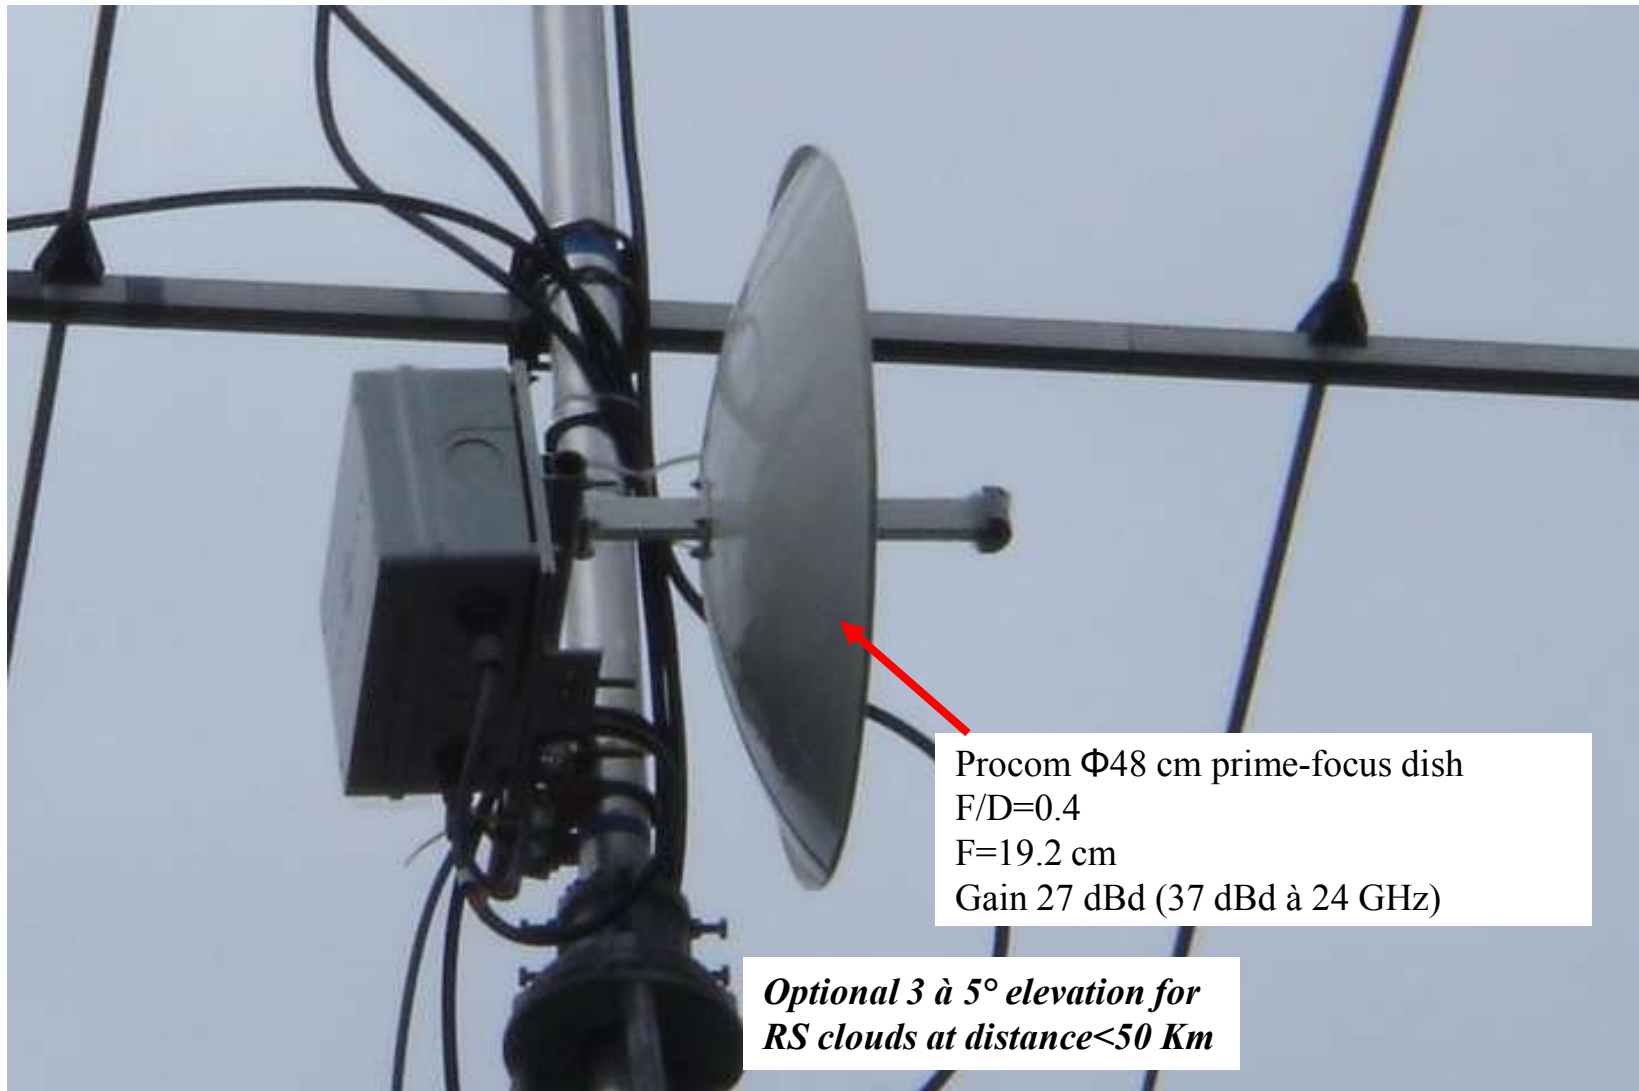



# 10 GHz DB6NT Transverter

**Procom dish : grasshopper breeding inside its waveguide !**

Beautiful attenuator in the whole guide length between Penny-feed and coax transition!





# 10 GHz DB6NT Transverter

Procom dish : Penny-feed protection with plumber special teflon



Pictures made by F6ETI

## **5- FT-817nd mods for Tx purposes**



**Best TRx choice because fully compatible with the tranverter options of:**

- the Ham Radio Deluxe logbook**
- FT-817 commander (also from HB9DRV)**


**Target : positive voltage in the 144 MHz coaxial while tXing**

# FT-817nd mods with +12V in coax while tXing

FT-817nd mod for DC addition in coax while Txing (upper side) or « **reversal PPT** »

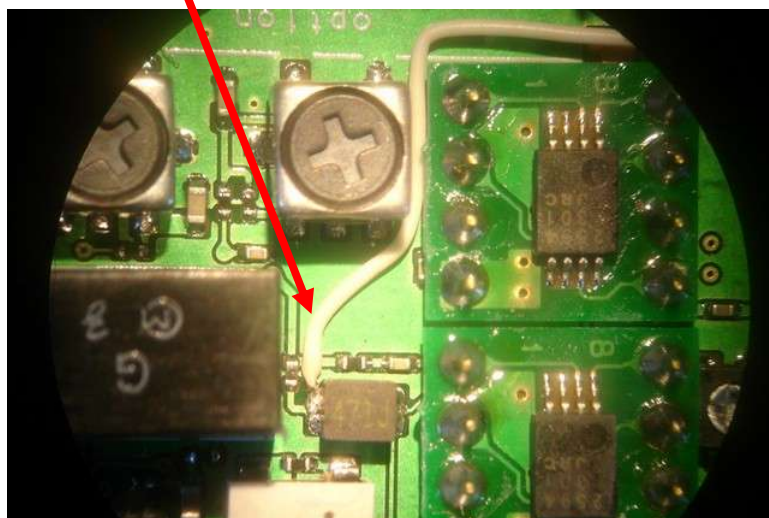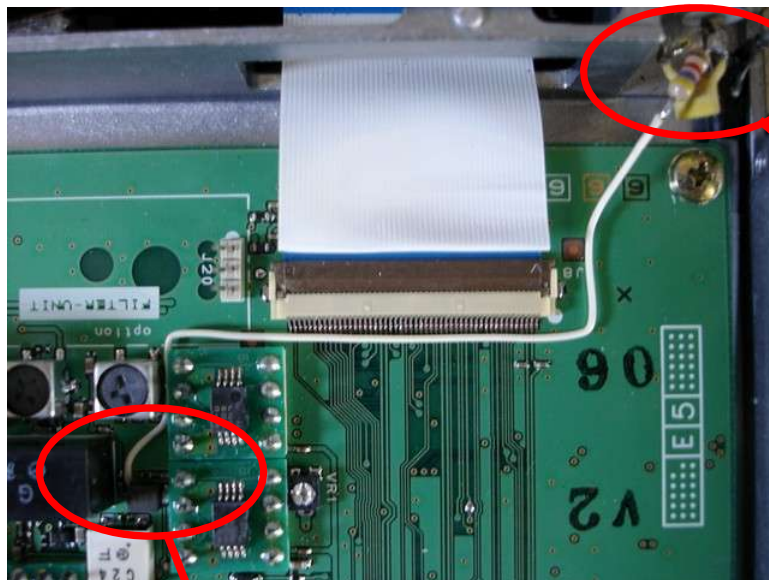

*DB6NT transverters need +V in coax cable for switching in Tx mode !!*

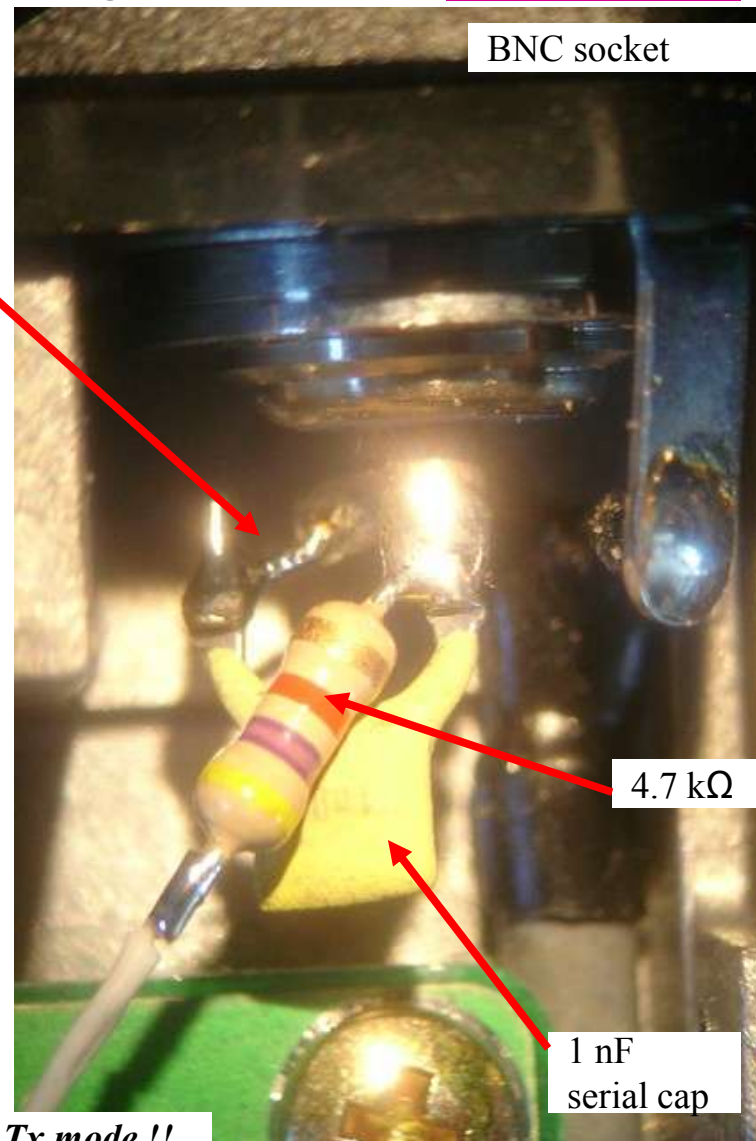



# FT-817nd mods with +12V in coax while tXing

## FT-817nd desensibilisation procedure

With only noise, the S-meter drops down from S8 to S1 to the 144 MHz Rx

-TX OFF

- appuyer simultanément sur A, B et C et conserver les 3 BP enfoncés
- mettre en marche → le 817 envoie une série de bips et passe en mode config
- sélecteur à gauche pour faire défiler les menus
- choisir **menu 5 VHF RXG** ( gain Réception en VHF ) valeur initiale=128
- descendre à la **valeur 56** → S1 de QRM ce qui ne saturera plus le FT-817nd
- presser le bouton F pendant plus d'une seconde

Attenuation reached after decreasing S8 to S1 in the 144 MHz IF line : roughly 14 dB

# FT-817nd mods with +12V in coax while tXing

## FT-817nd automatic CW associated to MixW2 : configuration

F5DQK - Current log: MixW2.log - MixW

QSO	Mode	Freq	Date	UTC	Call	Name	QTH	RST_Sent	RST_Recv	Notes
31	RTTY	14078,900	21/02/07	18:21:40	IR7ANT	xxx		599	599	
32	RTTY	10141,648	23/02/07	10:38:57	DM5JL			599	599	
33	RTTY	50253,708	10/09/07	17:08:14	9A5CW			599	599	
34	CW	144105,235	23/02/07					599	599	

PTT & CAT

CAT: YAESU  
Model: FT-817

PTT & CAT Interface  
COM2 (38400) Details Disabled

☐ Save frequency on exit ☐ Display zero beat frequency  
☒ PTT via CAT command  
☐ CW via CAT command  
☒ CW out via soundcard  
☒ CW is LSB  
☒ AFSK in place of FSK

DIG (Yaesu) is: LSB  
CW pitch: 800 Hz  
FSK center freq: 2210 Hz  
Default digi mode: USB

Cat correction (Hz)  
Global: 0  
USB: 0  
LSB: 0  
CW: 0  
Digi: 0  
TX to RX: 0

☒ Mouse wheel for tuning Sensitivity, Hz/tick: 500

CW: 14 wpm  
Slower Faster

FT-817nd en mode USB

# **6- 10 GHz prime / offset dish comparison**

# Prime-focus and offset dish comparison

## Gain comparison of prime-focus and offset dishes

Dish	Height (cm)	Width (cm)	Depth (cm)	Gain (dB)
Procom Prime-focus	49	49	na	32 calculated
Worldsat offset	80	73	6.4	36.1
Echostar offset	131	121	11.5	40.5

At same dims <100 cm, the offset gives far better results

That's the best way to both improve Rx and Tx by a minimum of 3 to 4 dB



## 7- Offset mounting problems

F1PDX home made tripod




**Target : vertical inclination down to  $0^\circ$  (not used in SATTV)**



# Solving offset dishes 0° elevation

## 1- The normal way (with much chance)

- Initial dish adjust angle setting down to 0°
- Slim dish mounting at its lower part

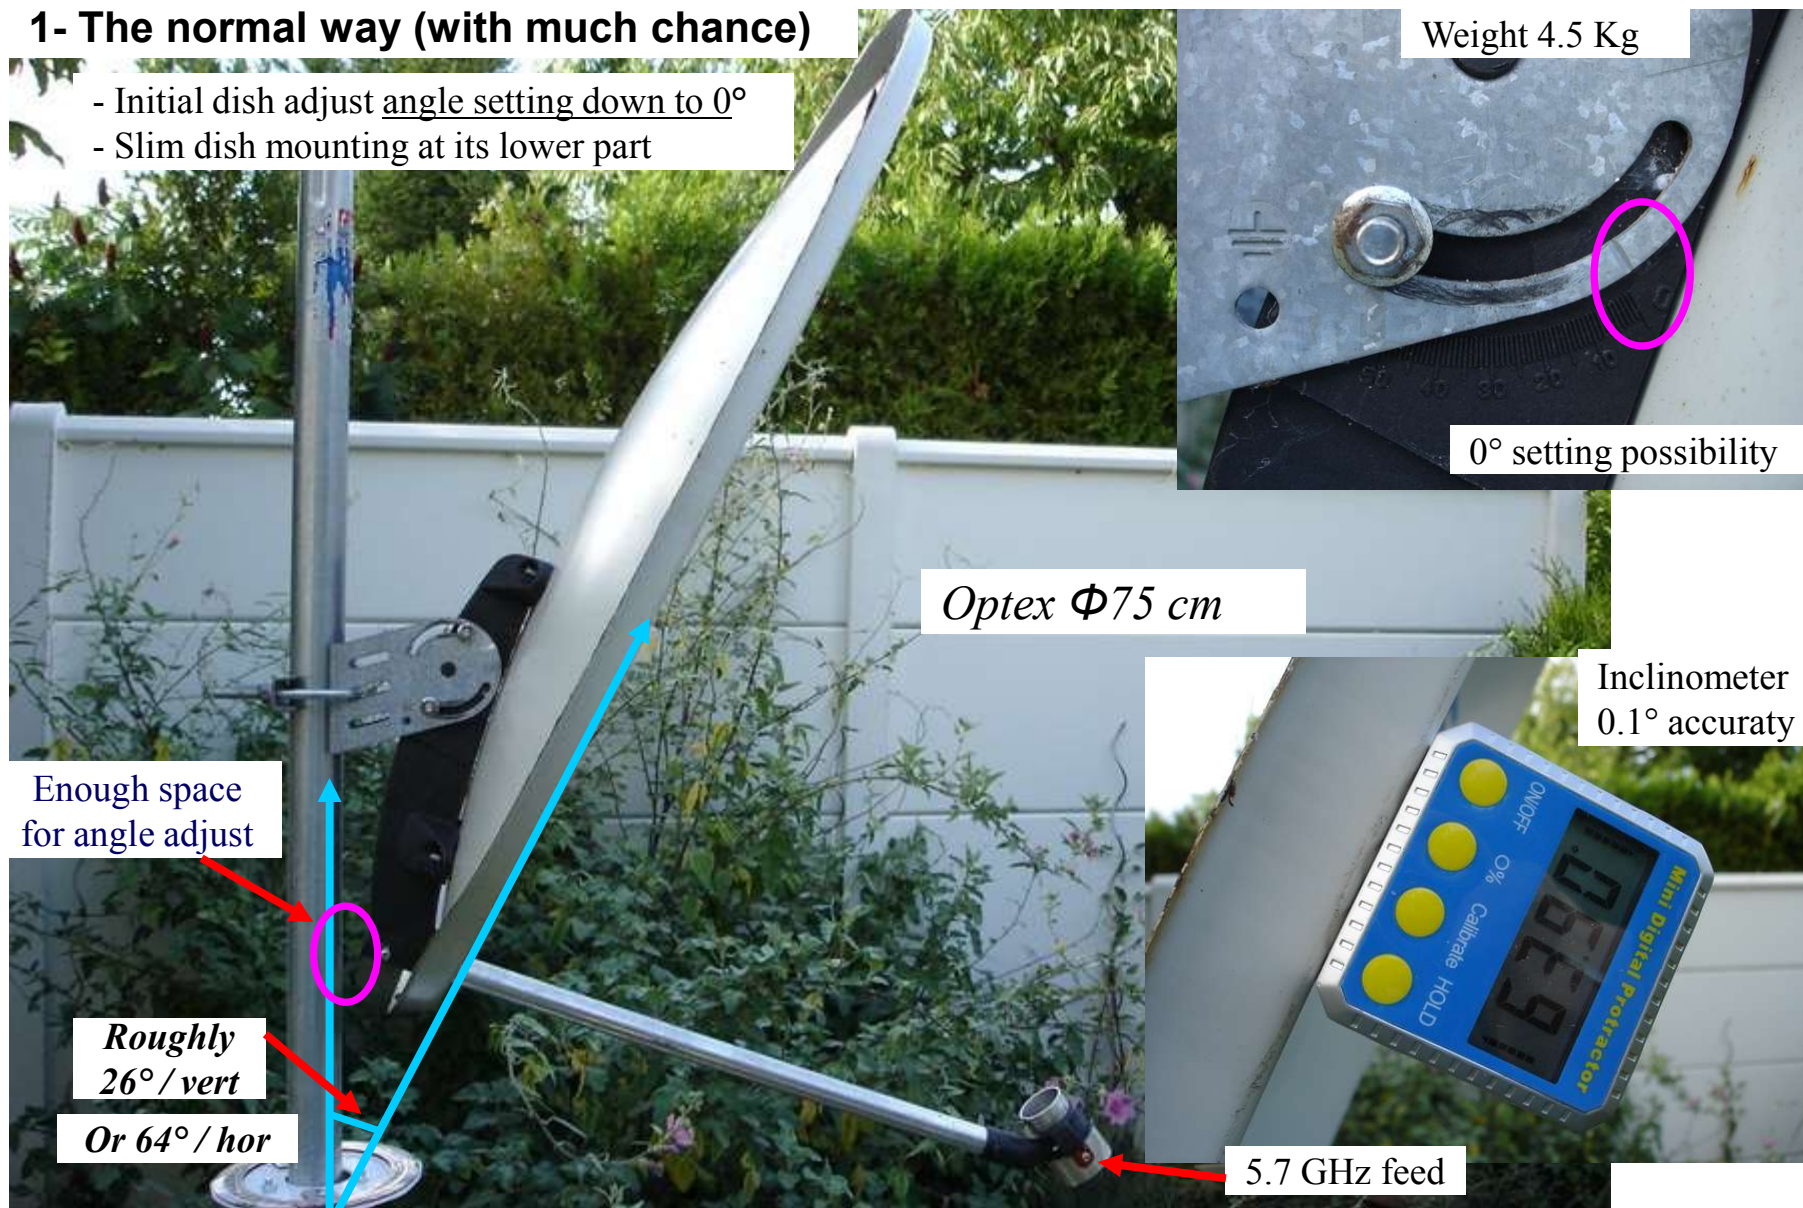




# Solving offset dishes 0° elevation

## 2- Intermediate arm with angle

- Initial dish adjust angle only down to 10°
- Thicker dish mounting at its lower part

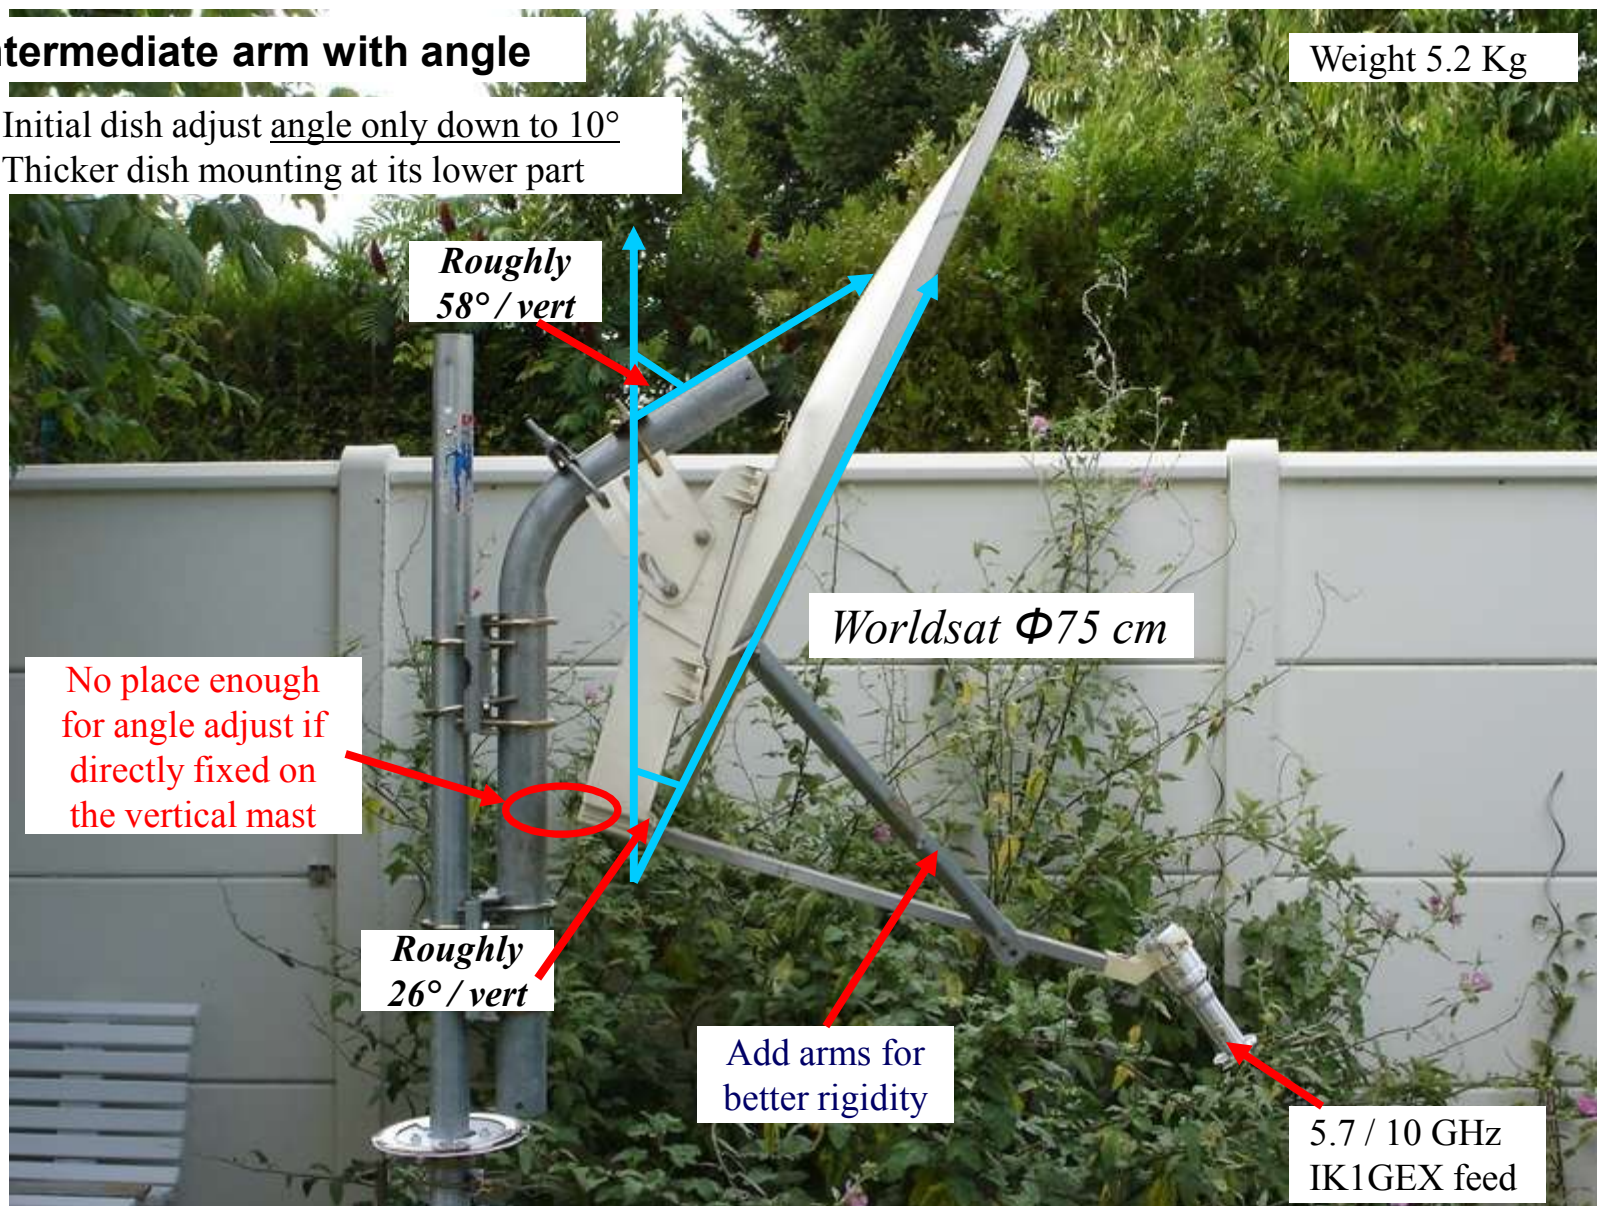




## Solving offset dishes 0° elevation

### 3- Dish returning: the only way to reach the 0° tilt angle

- Initial dish adjust angle only down to 10°
- Dish mounting too thick at its lower part

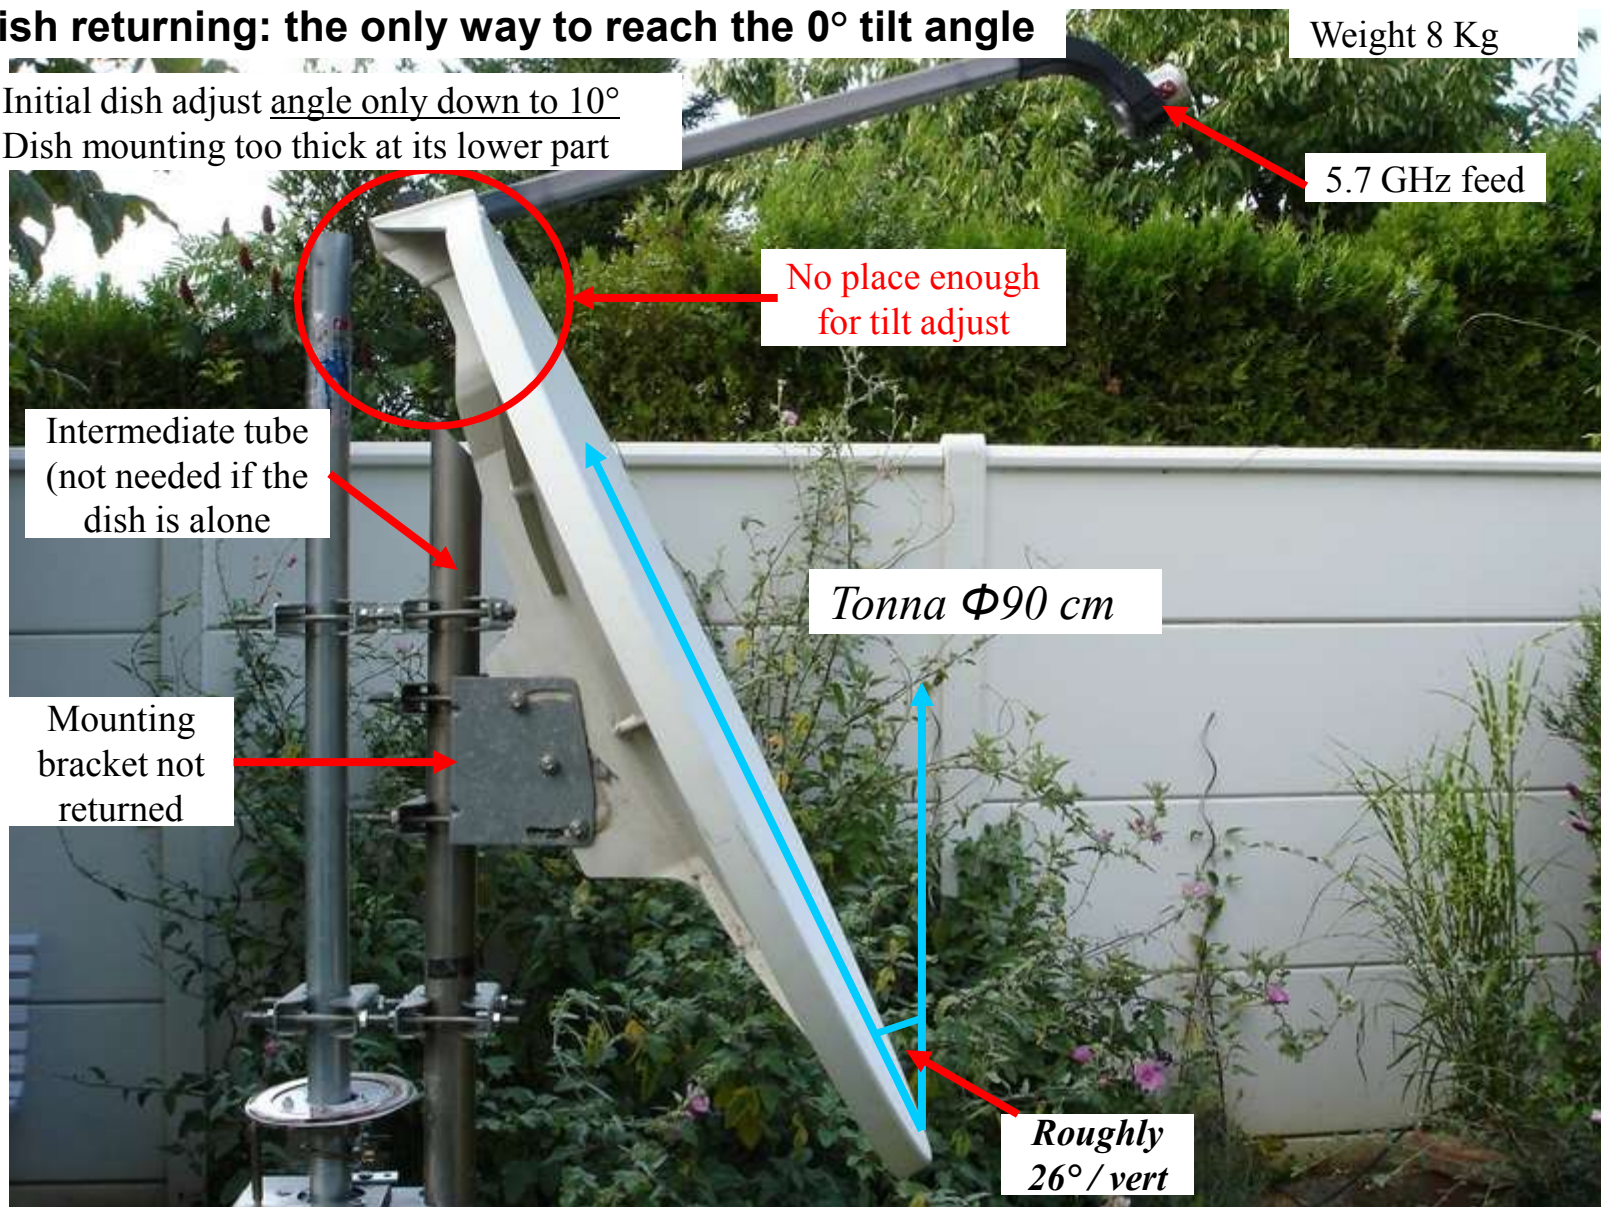




# **8- 10 and 5.7 GHz IK1GEX double horn**

# IK1GEX 5.7 & 10 GHz double Horn

Double 5.7 and 10.4 GHz horn

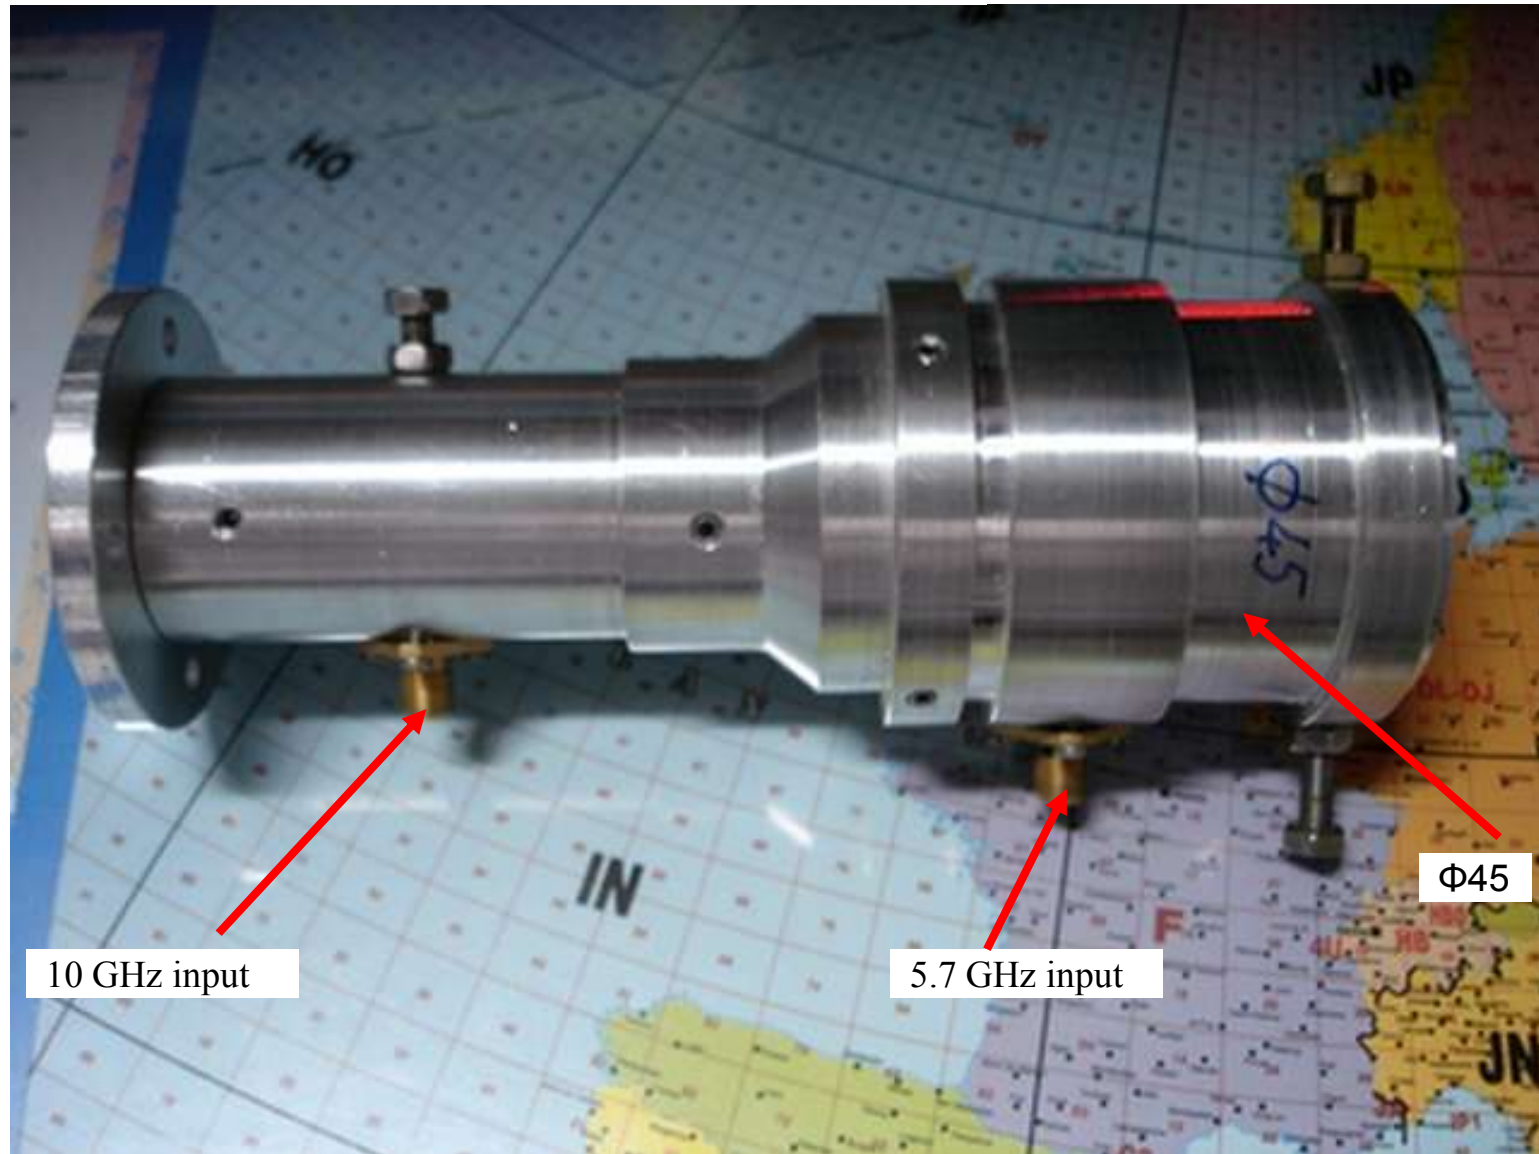


# IK1GEX 5.7 & 10 GHz double Horn

## S11 specs on both bands given by IK1GEX


Optimized for dishes with  $0.55 < F/D < 0.75$  (principally offset designs)

NB: prime-focus dishes have  $0.3 < F/D < 0.55$

5.7 GHz

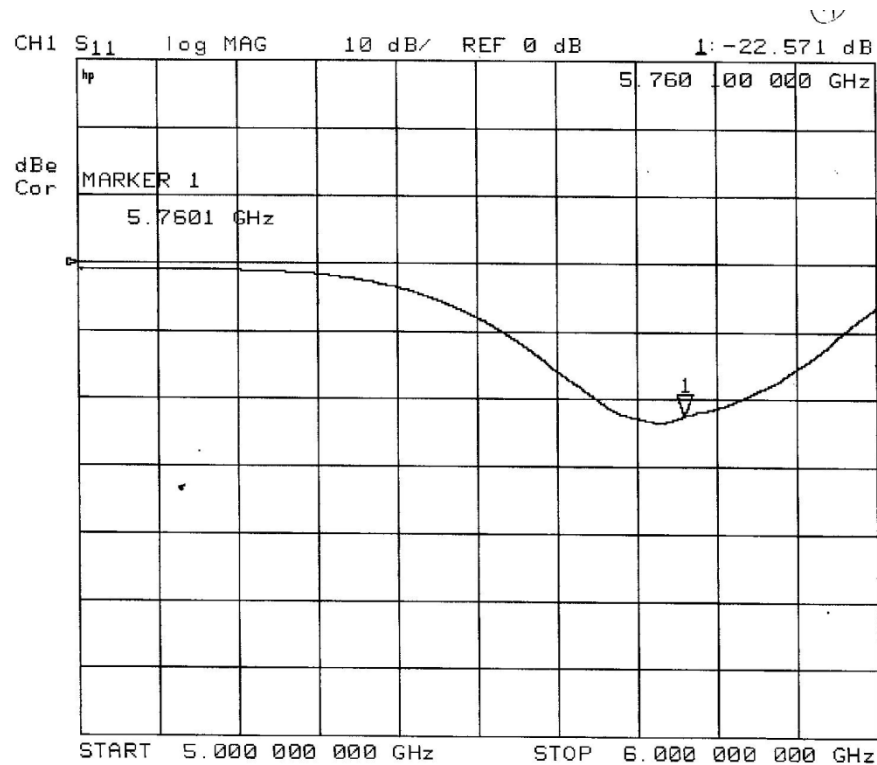


10.4 GHz

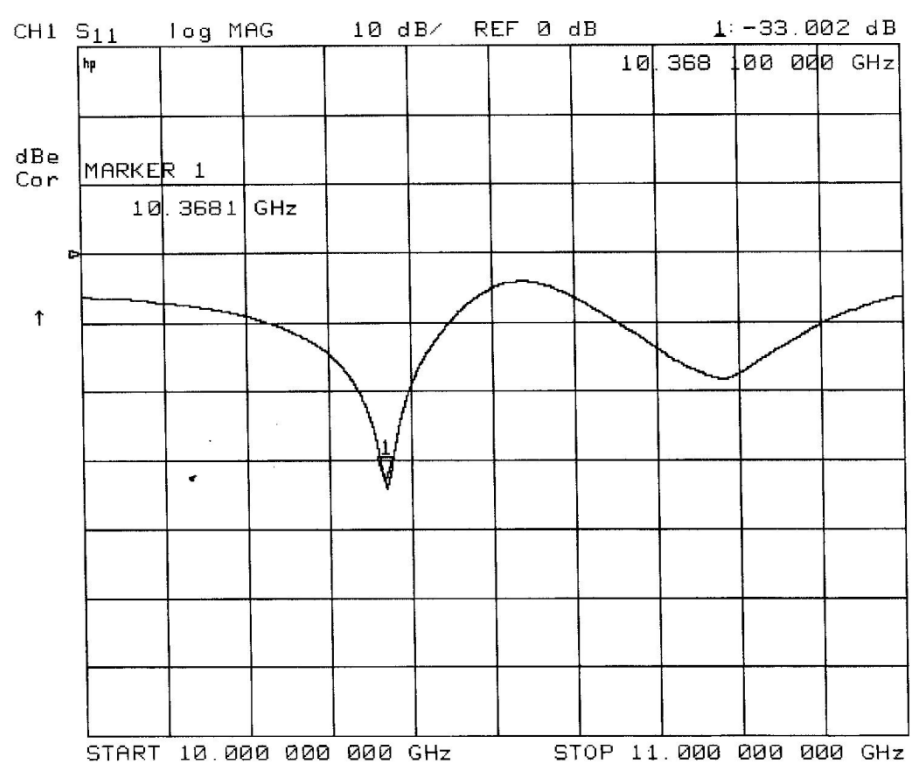

# IK1GEX 5.7 & 10 GHz double Horn

S11 measured here on both bands

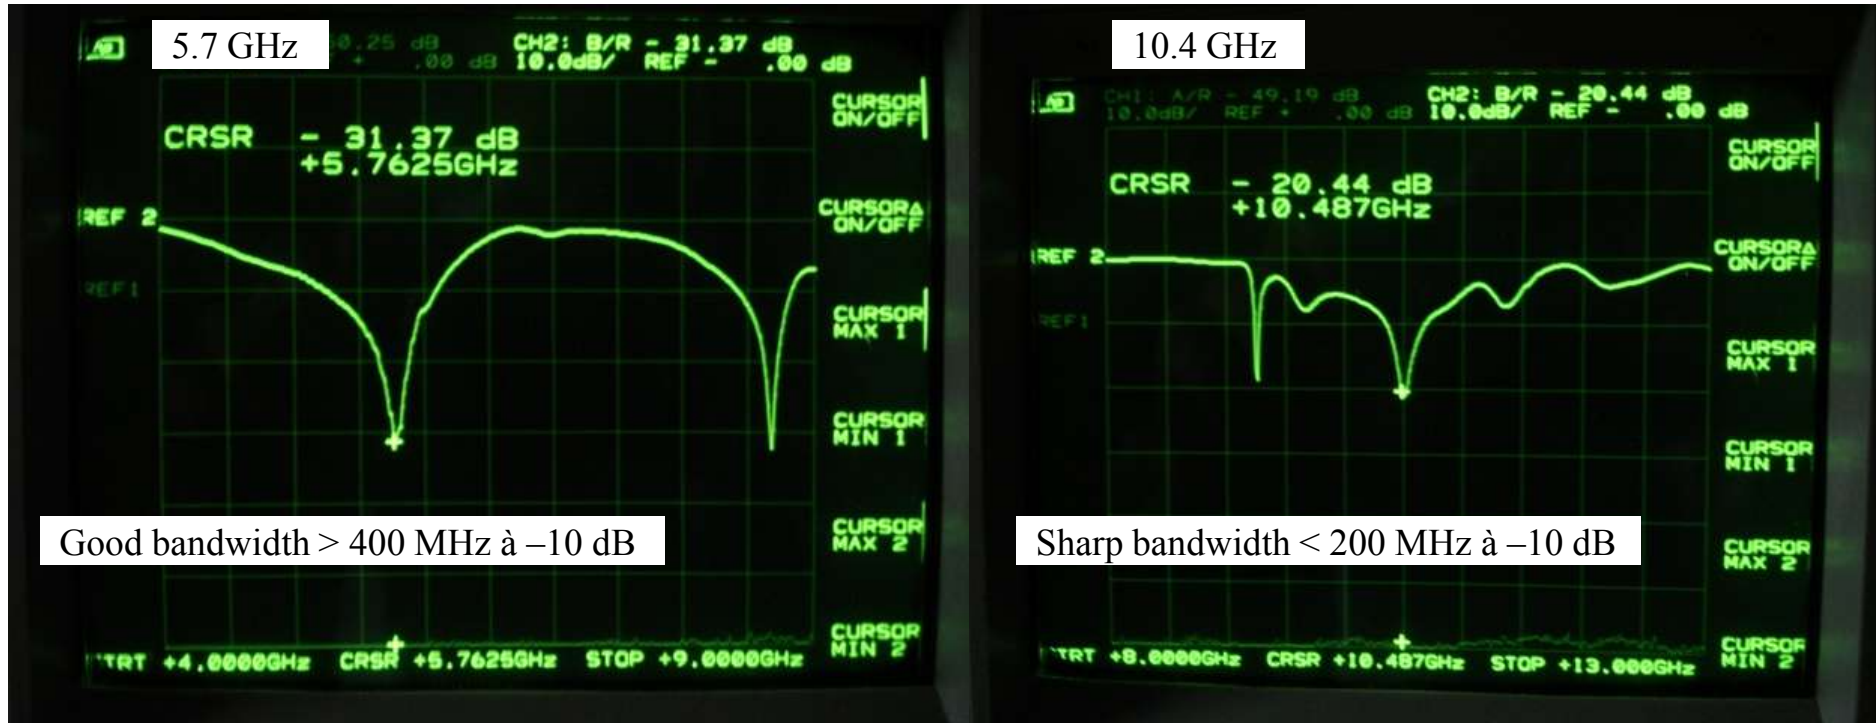


Scalar analyser HP 8757a + sweep HP 8350b 10 MHz – 20 GHz



# IK1GEX 5.7 & 10 GHz double Horn

10 to 5.7 GHz isolation

5.7 to 10 GHz isolation

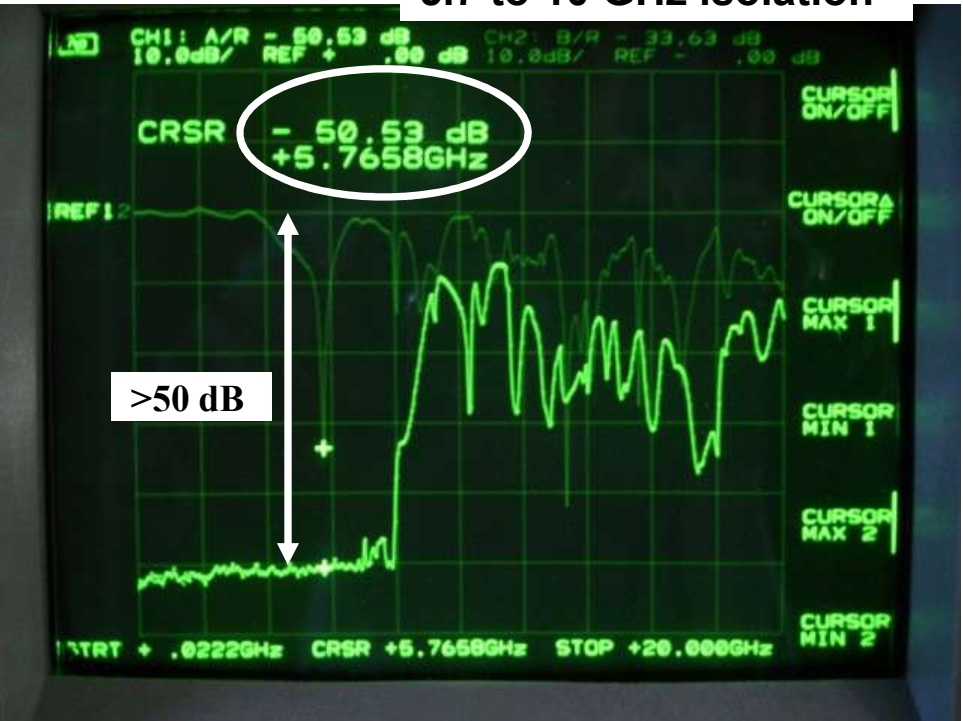

**Target :** double 5.7 & 10 GHz feeding on one same 80 cm offset dish

**Cure :** far better isolation must be done on the 5.7 GHz Rx part

NB: in opposite side of a coax cable, the guide acts like a **HIGHPASS filter !!**



10 GHz feeding – measures on 5.7 GHz SMA input

# IK1GEX 5.7 & 10 GHz double Horn

## Compromise of different phase center positions on each band

- Dixit F6DRO, the gain on each band cannot be optimised because the phasing center on every band is at 2 different locations.
- So a monoband horn has more the preference
- Discussion to be continued

# 9- 10 GHz SQG horn

**Absolutely perfect for offset dishes**


**Max yield for offset dishes with  $f/d = 0.85$**

# SQG 10 GHz Horn

## Horn preparing

- Taking off the teflon surplus inside the cavity
- SMA pin cutting → 6.2 to 7 mm useful radiating part

- OZ8AFC Pelle from Silverfox Technology Danemark sells it with the reference 10 GHz feedhorn for offset dish
- F4DRU did make the last grouped order

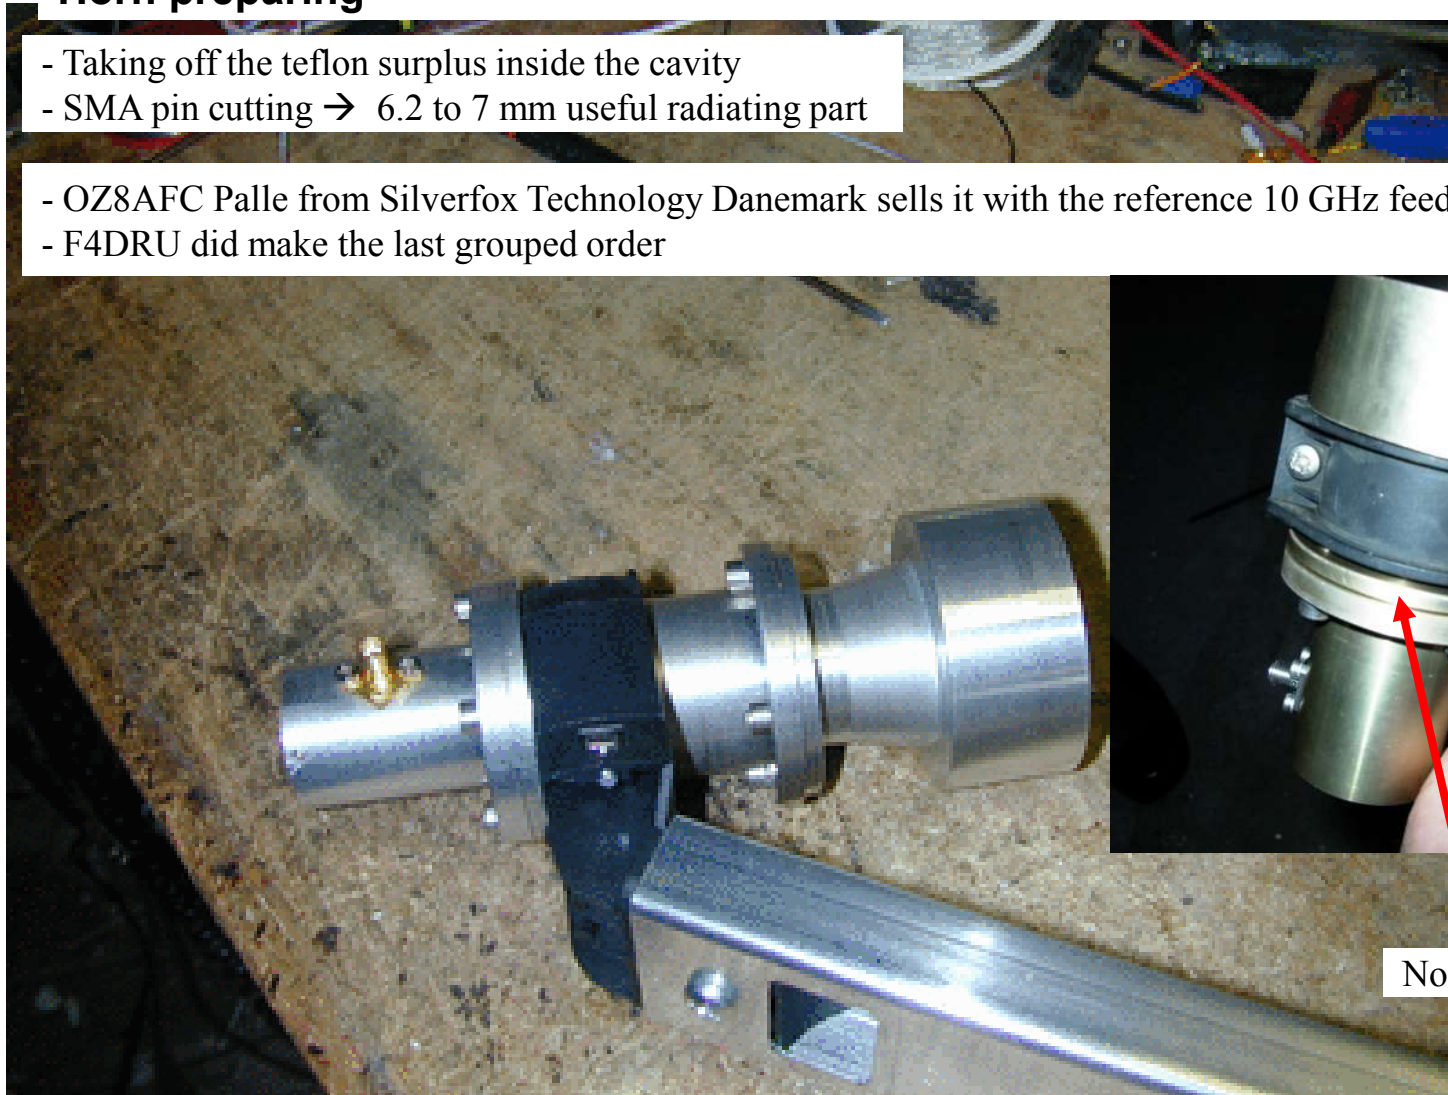

No central fixing part here



# SQG 10 GHz Horn

S11 measures



# **10- Visiosat SATTV horn**

**For comparison with the precedent horns**

# Visiosat SATTV Horn

S11 measures



# 11- Improvement ideas



# Improvement ideas of my setup

-**Better antenna yield** : substitution of the 48 cm prime-focus by a 80 cm offset dish (especially for tropo conditions) → directly better yield of 3 to 4 dB for both Rx & Tx modes

-**Better LO stabilisation** : substitution of the 2.556 GHz LO with a high stability OCXO, rubidium or GPS reference

-**Output amplifier** Pout increase up to 3 - 5 Watts output



12V 10 MHz OCXO

Pout=+6.8 dBm

*F5DQK April 2014*



Max error expected on a 10.224 GHz LO  $0.2 \times 96 = 19.2 \text{ Hz}$   
No more temperature depending



24V 10 MHz  
rubidium OCXO

74

*Getting started on 10 GHz band - release 6*

# **12- 10 GHz setup of some french dXers**

**Also great thanks to all of them for their given help**

## F4DRU/p setup




## F4AJS/p setup






## F1BZG/45 setup

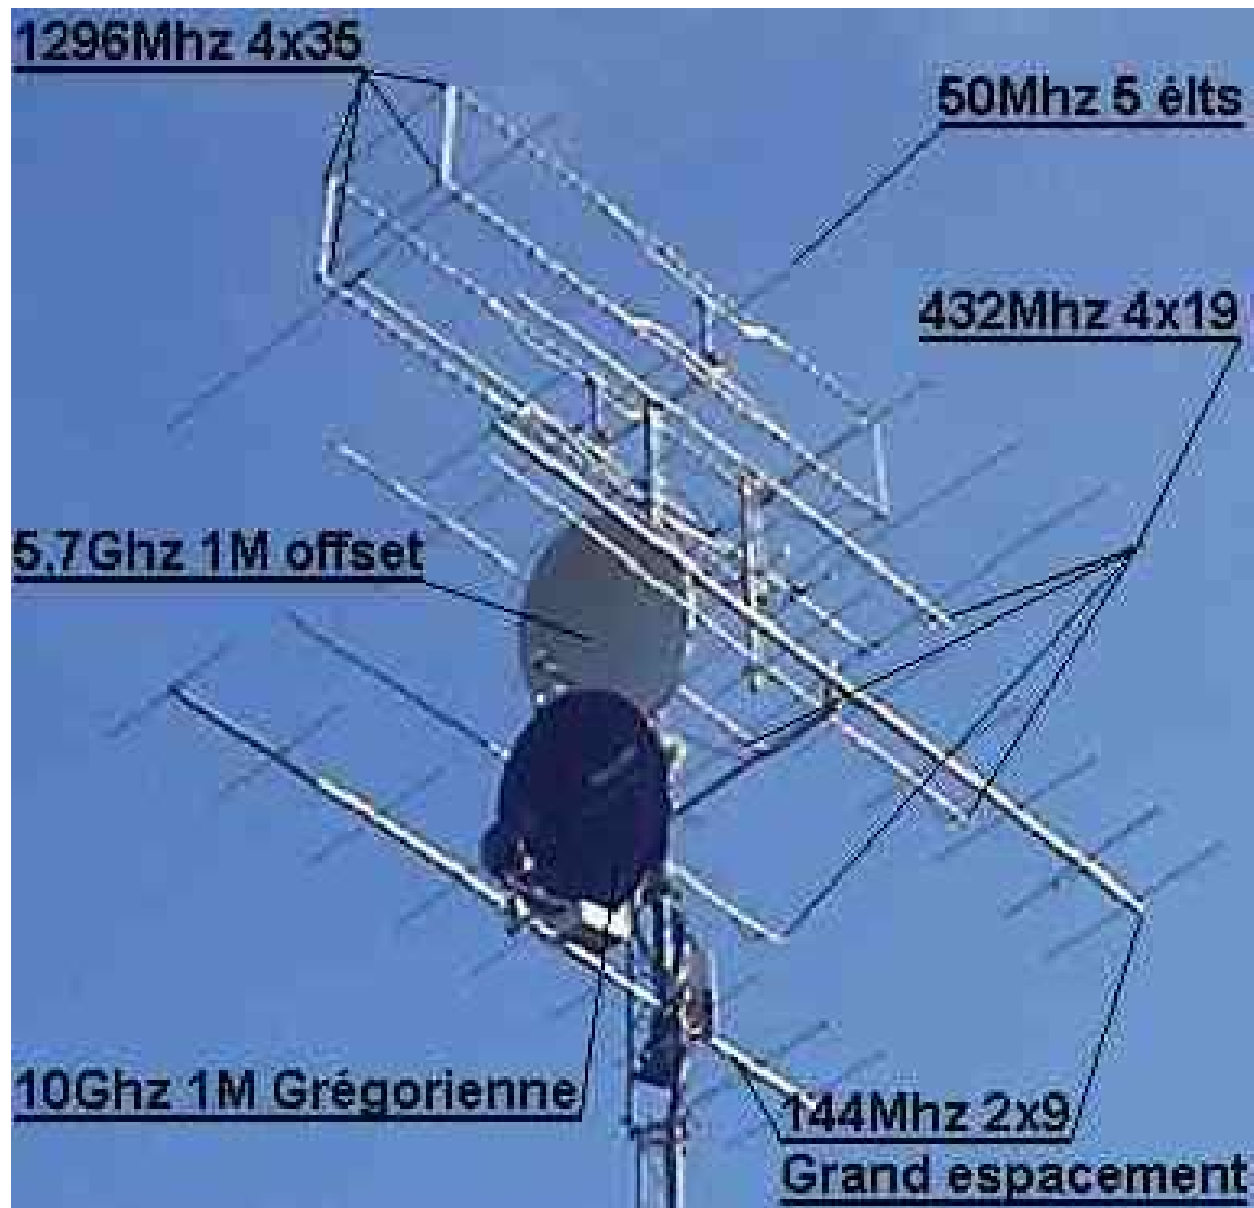

## HB9AFO/p setup



# F5HRY setup


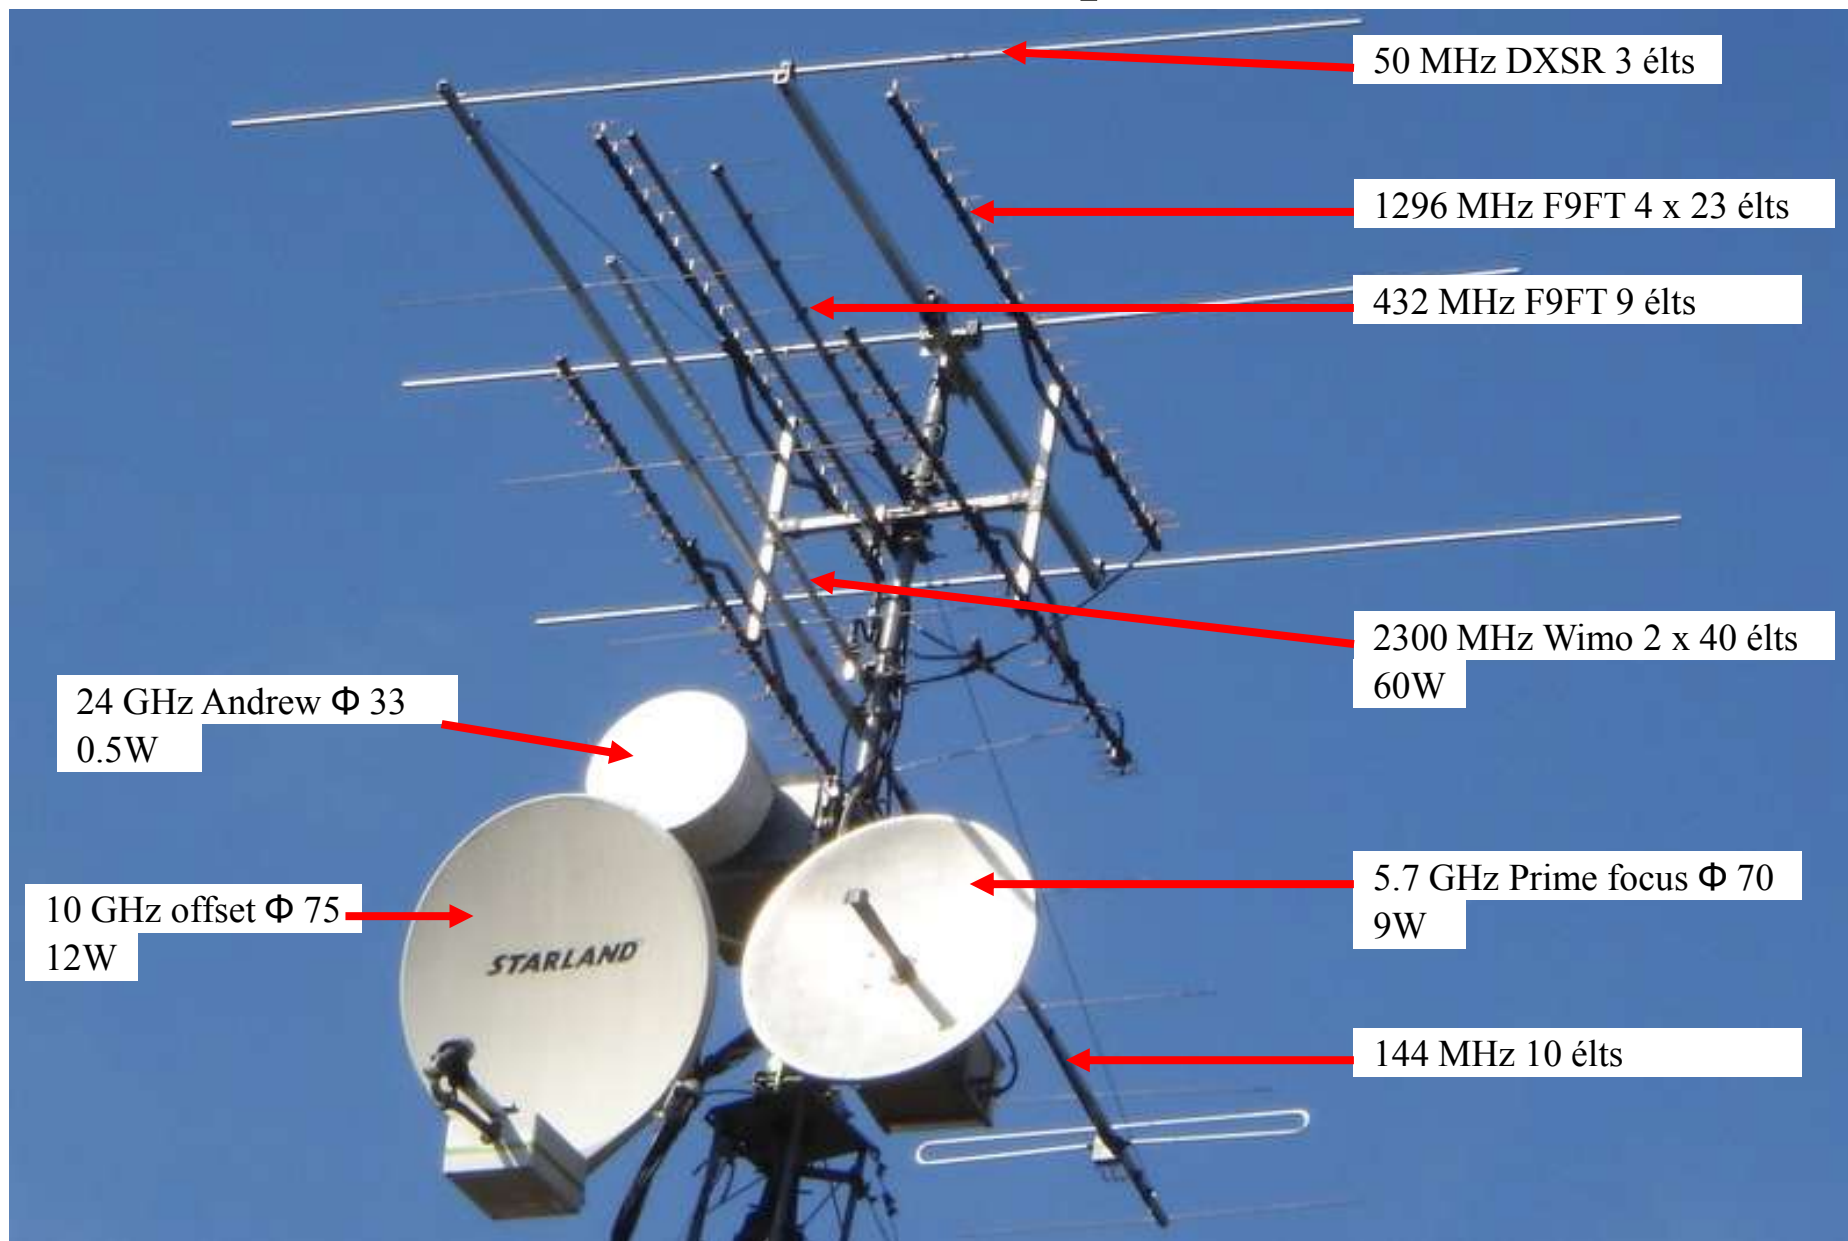


# F6APE setup





## F8BRK setup

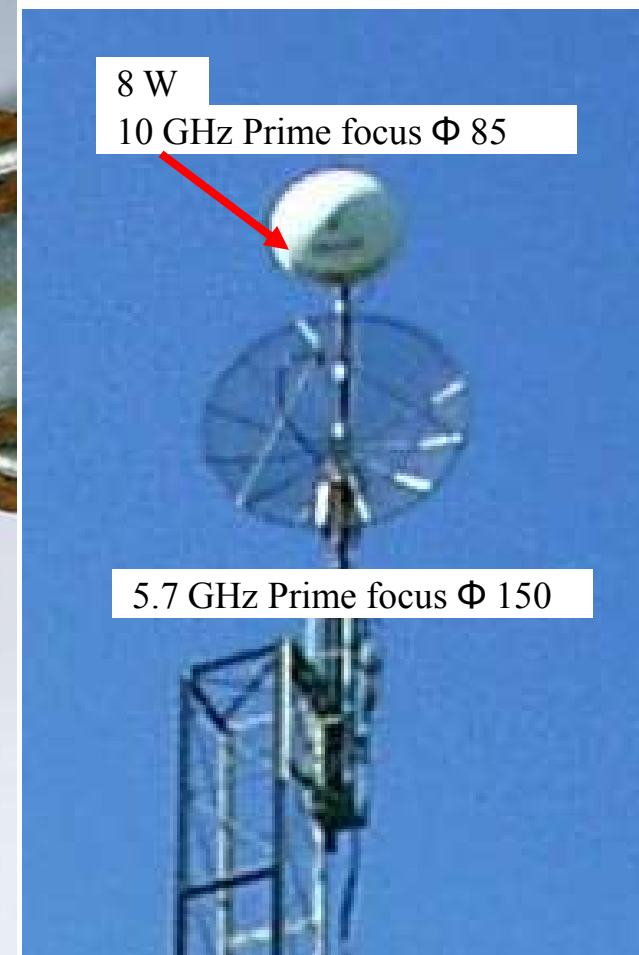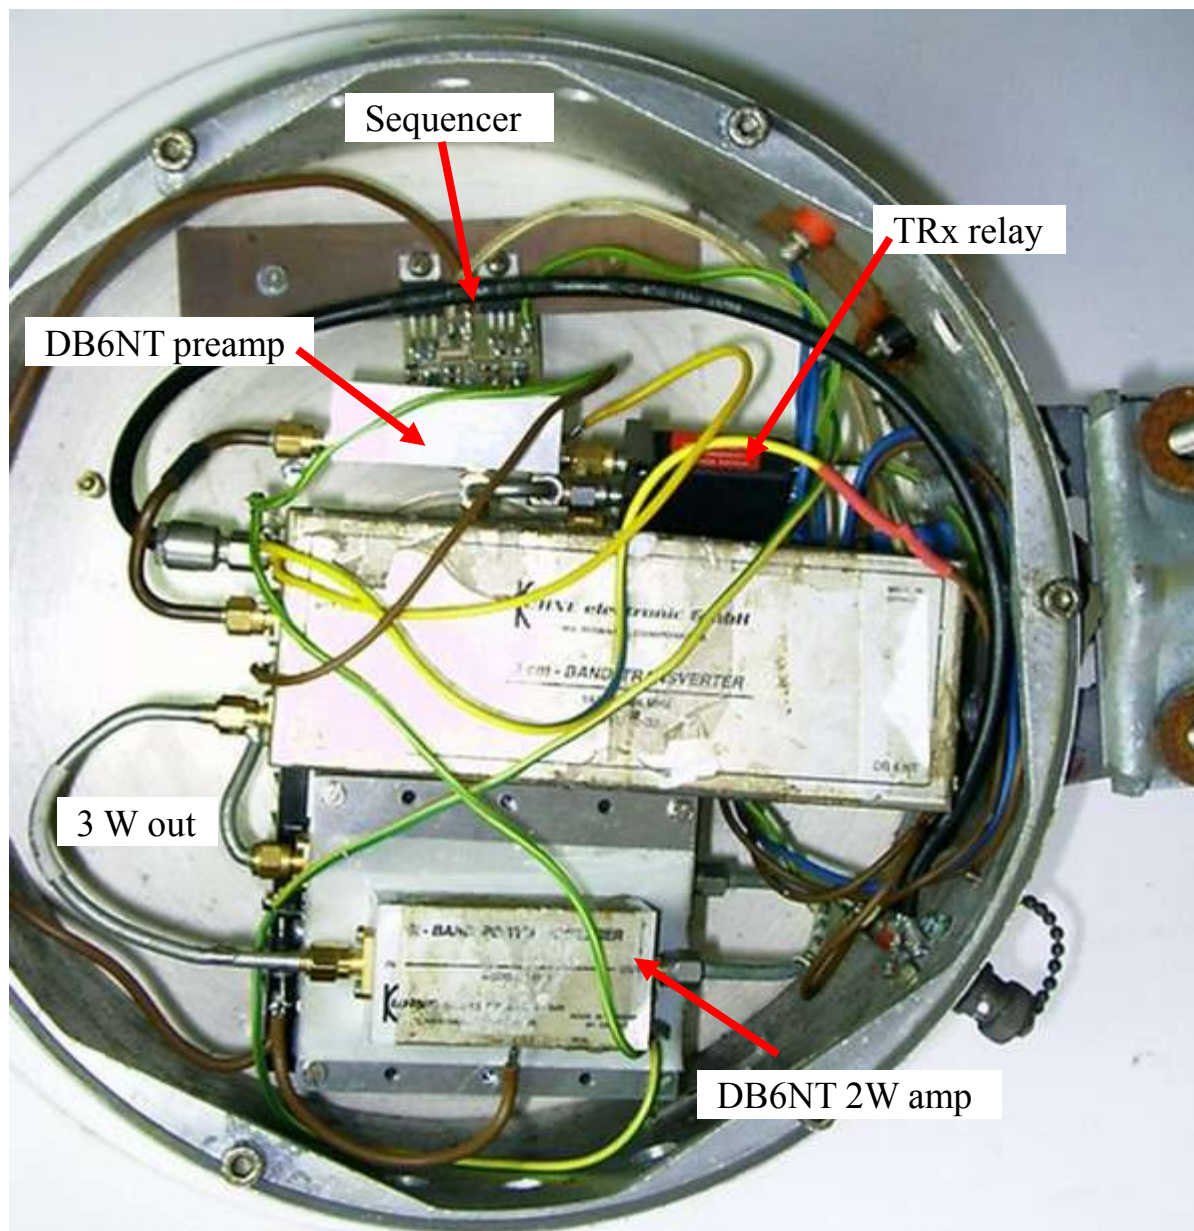

## F2CT/p setup




## F6ETI setup






## F4BUC & F1PDX/p setup

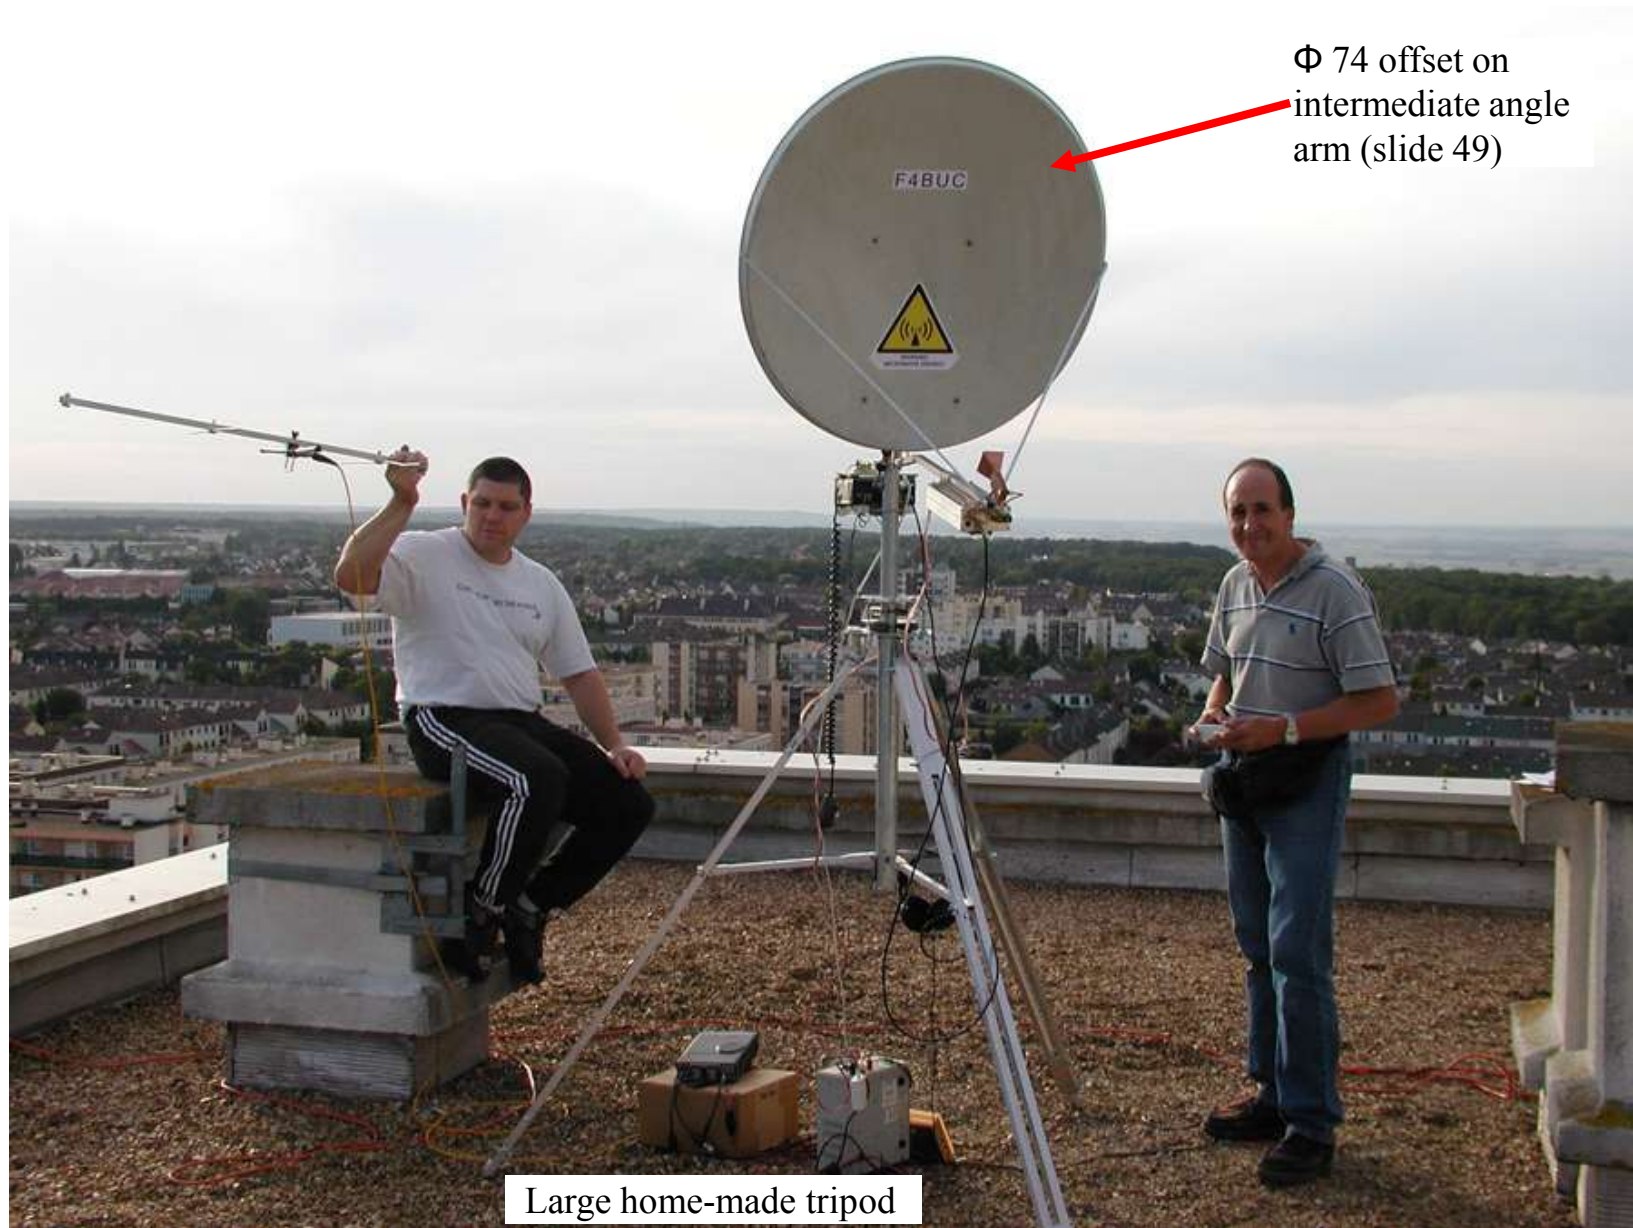




# ON5TA setup

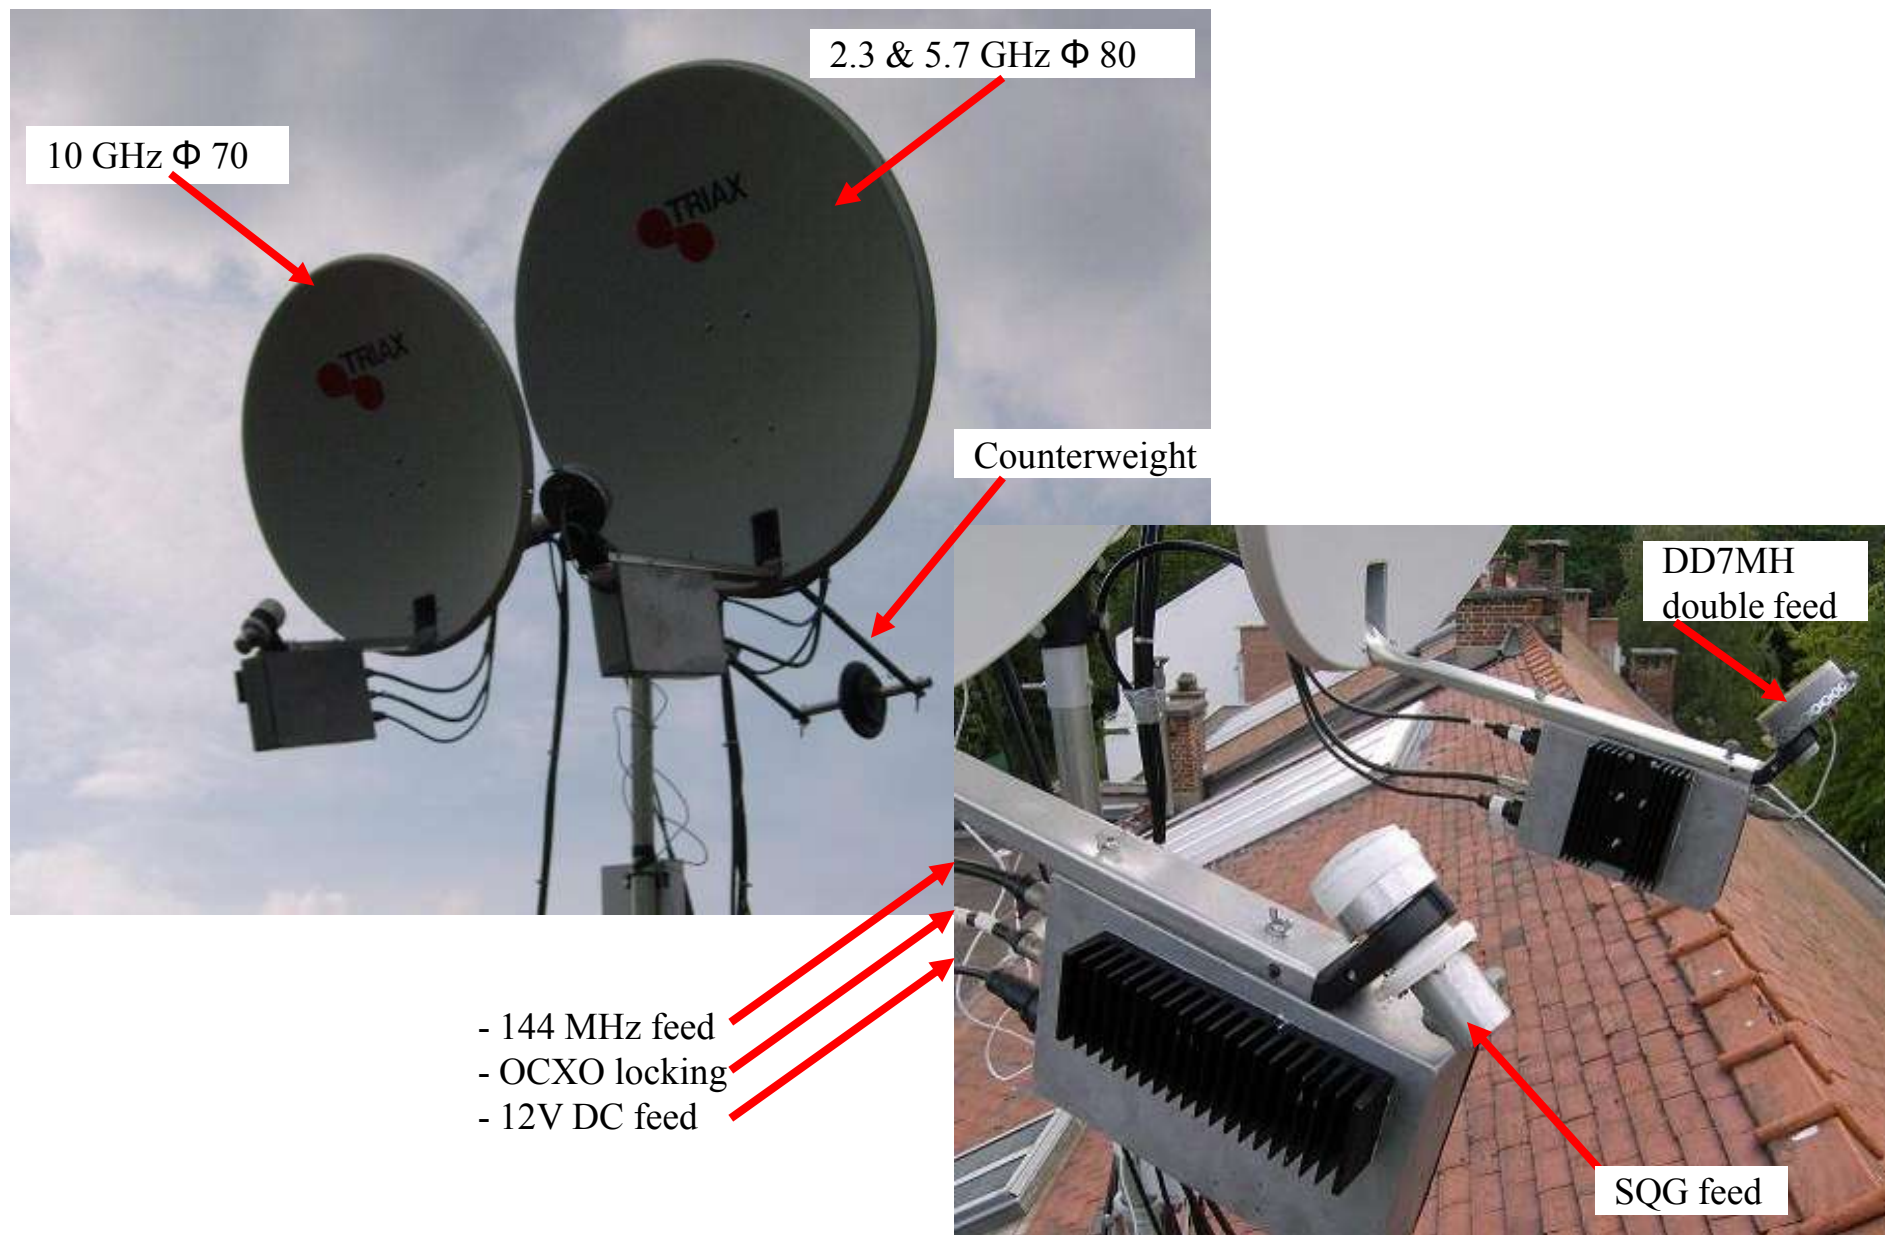


## DF6NA setup

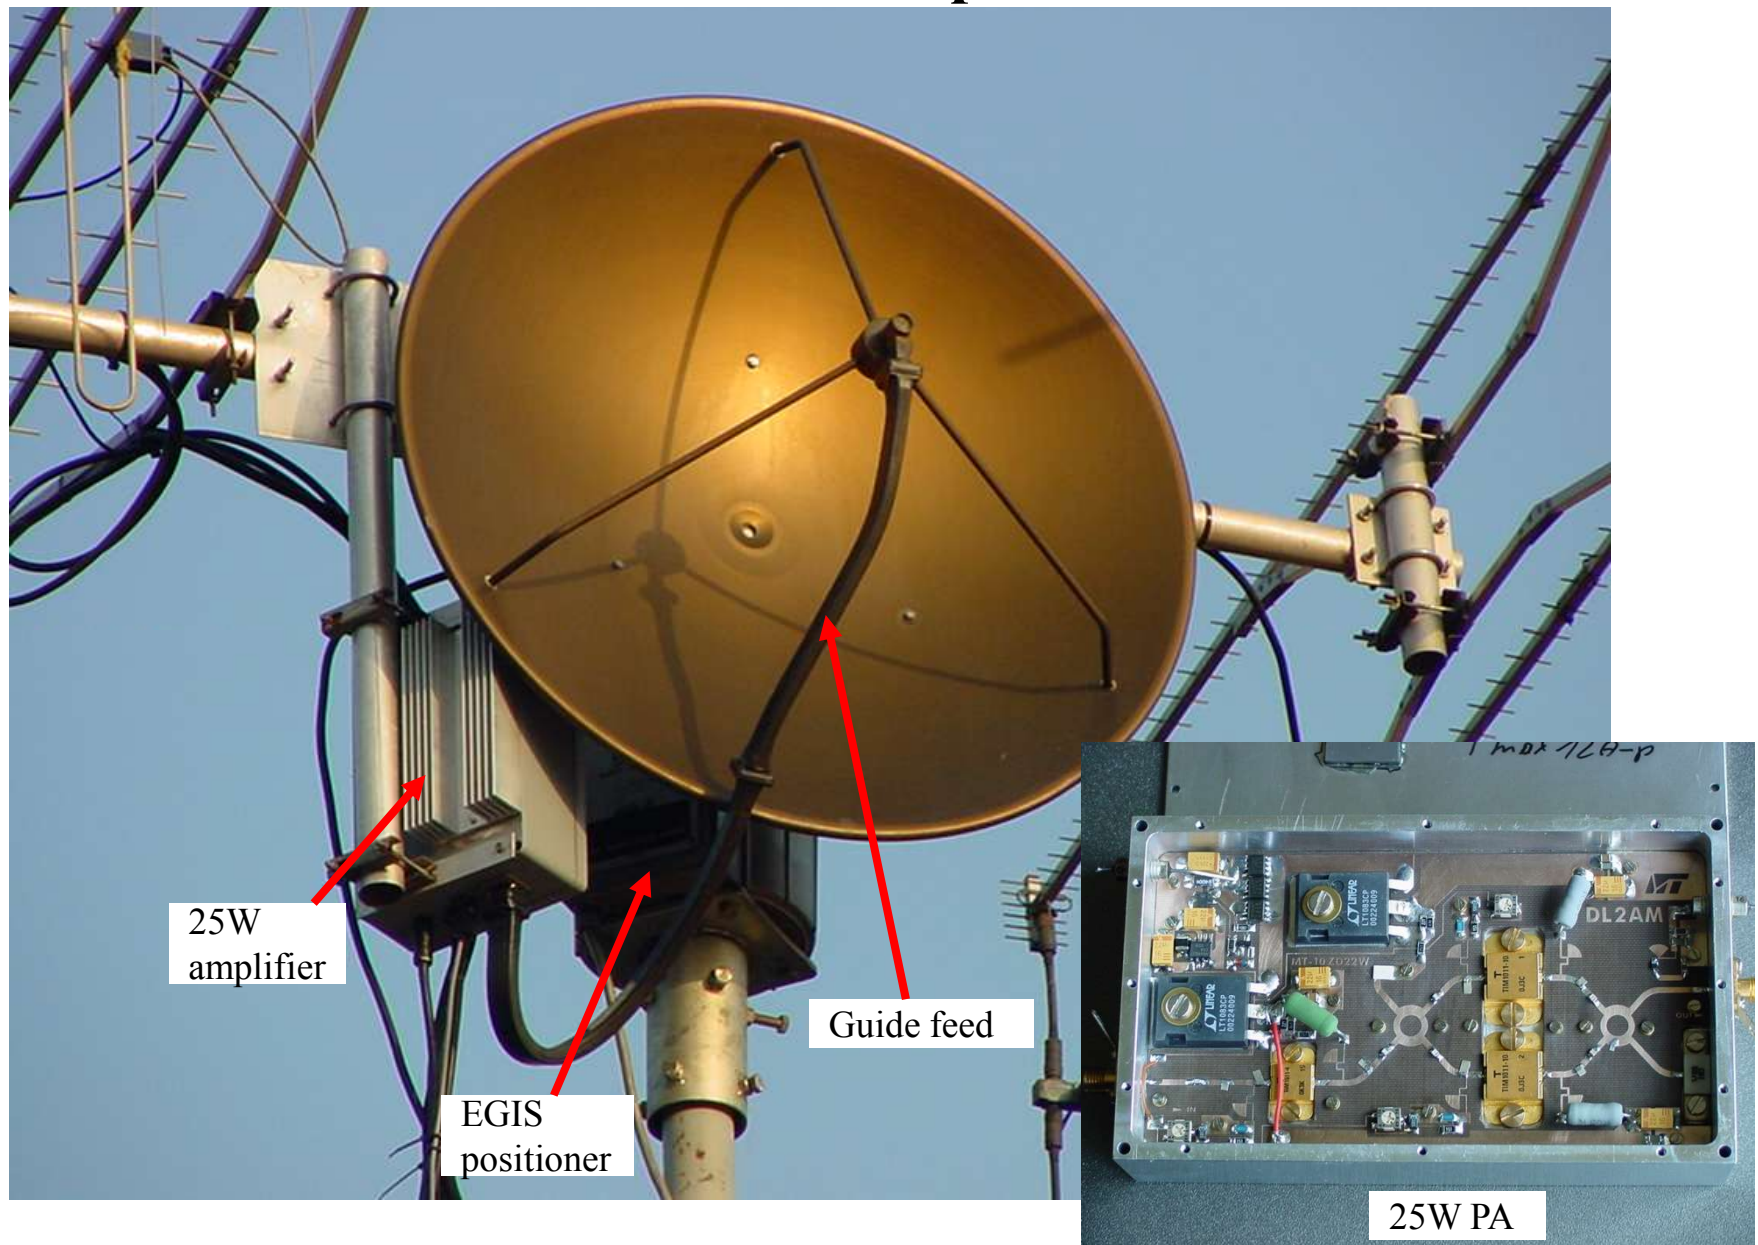



## DL7QY setup

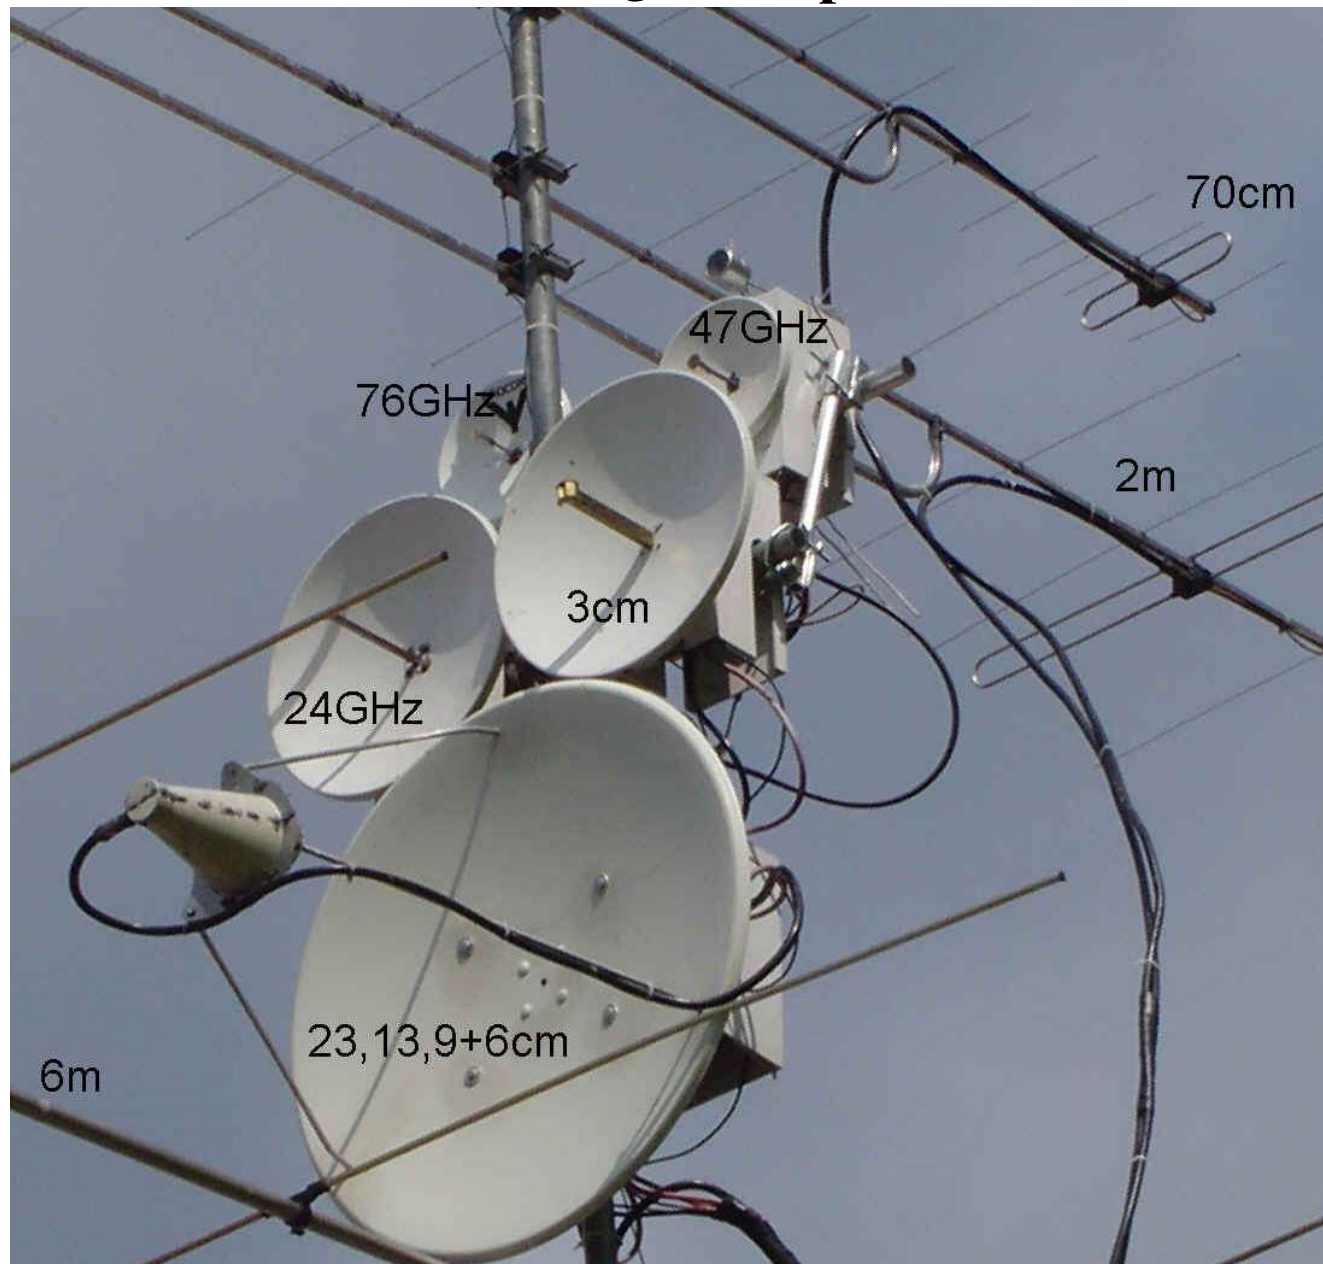

# 13- Acknowledgements

**To the whole french « hyper ham » world, also to DD7PC and especially F1PDX for his great help.**